



# Transformer

Catalog Number TYPE QL


## 9T23B2673

50.0 KVA 60 HZ 1 PH 4.8 % IMP



40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

| PRIMARY<br>LINES ON H1-H2 |           |       |         |
|---------------------------|-----------|-------|---------|
| VOLTS                     | CONNECT   | VOLTS | CONNECT |
| 214                       | 8-H1,7-H2 | 428   | 8-7     |
| 227                       | 6-H1,5-H2 | 441   | 7-6     |
| 240                       | 4-H1,3-H2 | 454   | 6-5     |
| 253                       | 2-H1,1-H2 | 467   | 5-4     |
|                           |           | 480   | 4-3     |
|                           |           | 493   | 3-2     |

| SECONDARY<br>LINES ON X1-X4 |             |
|-----------------------------|-------------|
| VOLTS                       | CONNECT     |
| 120                         | X1-X3,X2-X4 |
| 240                         | X2-X3       |

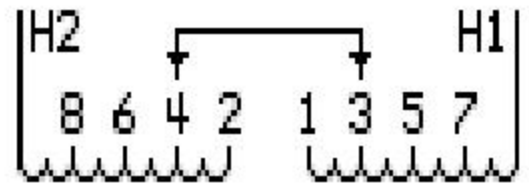

### COIL TAP ARRANGEMENT

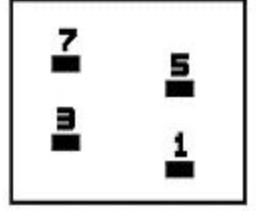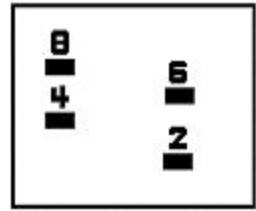

LISTED 769G

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06

Outline: 303B904AAP073

INSPECTION &  
FINAL TEST  
N731&

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL


IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES  
CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

080107

NET WGT  
340 LB

953

Assembled in Mexico

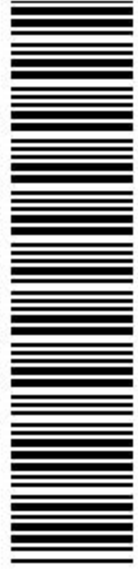

\*1M0000000\*



\*2M0000000\*



\*2M0000000\*