

HPC* Switches

New Generation High Pressure Contact Switches
with ArcWatch* Technology!



imagination at work

The High Pressure Contact (HPC) switch has been demonstrated to be a superior switching device when compared to bolted pressure switches due to the exceptional contact design. The new generation HPC switch is based on the time-proven platform of the Power Break* II circuit breaker, similar to the original HPC was based on the proven Power Break circuit breaker platform. Now, it's ArcWatch-enabled to provide a better Arc Flash hazard mitigation solution, 8 calories or less!

The new generation HPC builds on the abilities of the original HPC by utilizing the features of the Power Break II (PBII) circuit breaker. These features include UL field-installable accessories:

- Motor Operator Mechanism
- Remote Close
- Undervoltage Release
- Shunt Trip with Lockout
- Bell Alarm-Alarm Only
- Bell Alarm with Lockout
- Auxiliary Switch Module
- Mechanical Counter
- Key Interlock Mounting Provision
- Push Button Cover
- Door Interlock
- Blown Fuse Protector





In addition, the new generation GE HPC utilizes the EntelliGuard* control unit which incorporates many of the features of the EntelliGuard Trip Unit for GE circuit breakers:

- Built-in metering, waveform capture and Modbus communications
- Ground fault protection or alarm, optional GF disable
- GE's patented WFR Adjustable Selective Instantaneous protection
- RELT Alternate Adjustable fast instantaneous setting, remote operable and with positive status feedback
- Zone-Selective operation for GF that works with all circuit breaker trip platforms and includes four different GF curve shapes
- Instantaneous Zone-Selective operation that works with upstream EntelliGuard Trip Units and EntelliGuard control units

The new generation GE HPC switch is available in frame ratings of 800, 1200, 1600, 2000, 2500, 3000 and 4000A, both top and bottom feed, with IC ratings to 200kA with the appropriate UL Class L fuses.

Reliability and Arc Flash Mitigation

Features available for the new generation GE HPC include integral ground fault, operating the switch through a flux shifter instead of a shunt trip, which increases the reliability of the switch. Integral ground fault through the control unit provides 13 distinct delay bands, pickup-up points in 0.01 increments, 4 curve shapes, including a fuse-shaped curve for the maximum flexibility for ground fault coordination with other devices.

Exclusive to the new HPC for a fused switching device is the ability to have fully adjustable IOC (Instantaneous Overcurrent Protection). When the switch is ordered with IOC, the user can adjust the instantaneous pickup in a way to maintain the selective coordination of the proposed fused system, while also reducing the incident energy and the arc flash hazard. See GE DET-760 for instructions on the Exclusive GE WFR selectivity capability.

The switch can also be incorporated with RELT (Reduced-Energy Let-Through) to allow the user to initiate an instantaneous pickup that is lower than what is provided by the fuses in the switch, or even the selective WFR instantaneous protection. These features can lower the incident energy available at the protected circuit and provide lower arc flash incident energy at energized equipment.


See DEE-715 – HPC Switches, New Generation, Instantaneous Protection Application Guide for more details.



New and Retrofit Installations

The new generation HPC switch is available for new installations and for retrofit, to replace the older GE HPC. By retrofitting with the new generation HPC switch, remote operation of the switch through the motor operators, shunt trips with lockouts, RELT and the Adjustable IOC for continuous reduced incident energy can be added in the same footprint as that of the older existing switch.

Catalog Number Format

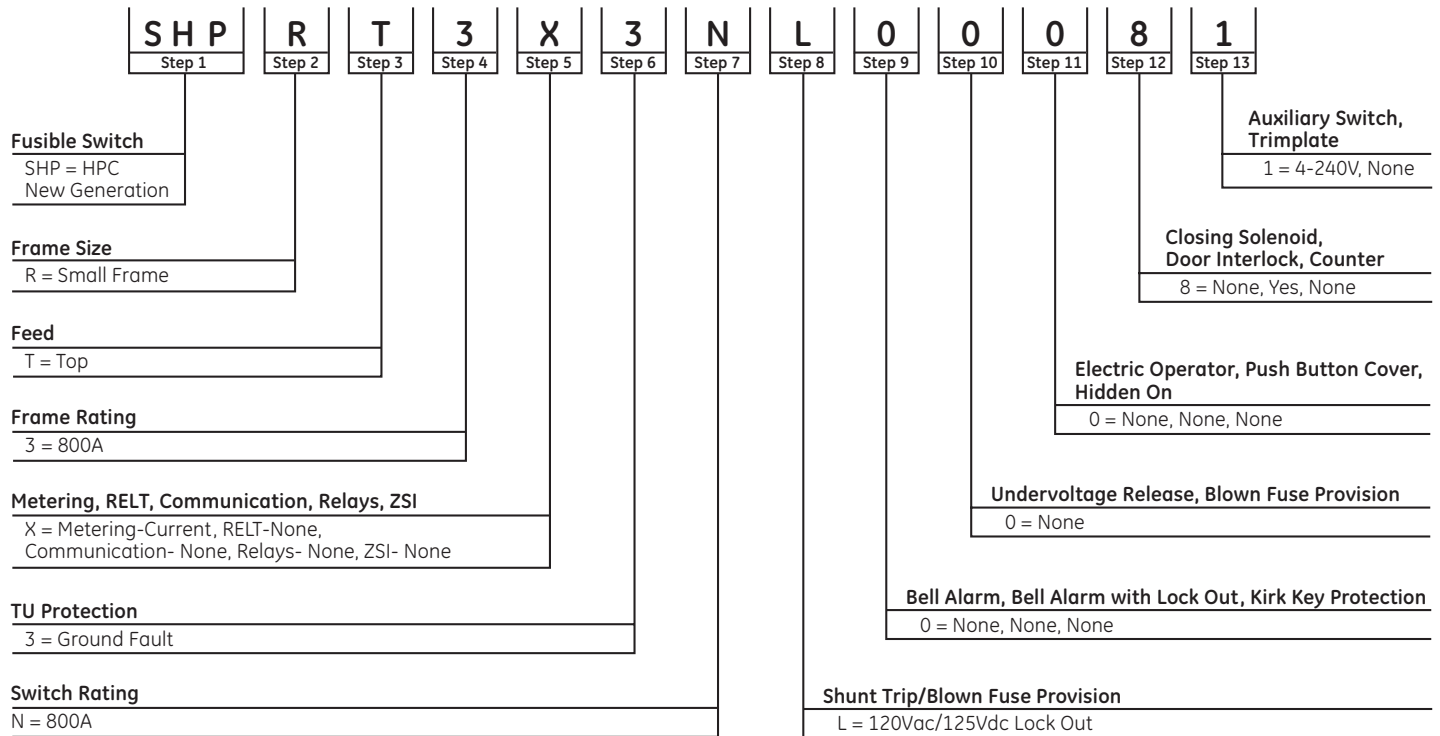

How to Order

1. Determine your new HPC 15-digit part number by using the Configurator (contact your authorized GE distributor) and referring to the BuyLog* for complete list of options.
2. Check EliteNet for price and availability (for access to EliteNet, contact your authorized GE distributor). Note: because of multiple possible combinations, only catalog numbers that have previously been ordered are in EliteNet. If the part number you are interested in is not in EliteNet yet, email the request to GE.1STOP_REPLY@GE.com to add it to the system.
3. Once the product number is loaded, the order can be placed via EliteNet.

GE
Industrial Solutions
 41 Woodford Avenue
 Plainville, CT 06062
www.geindustrial.com

© 2014 General Electric Company



References

- Online BuyLog: <http://energy.gecatalogs.com/>
 Online product information: geindustrial.com
- DEC-139 – HPC Switches Catalog Numbers
 Cross-Reference Table
- DEE-715 – HPC Switches, New Generation
 ArcWatch Enabled, Instantaneous
 Protection Guide
- DEH-41689 – HPC Switches, New Generation,
 User's Manual
- DEH-41700 – HPC Switches, New Generation,
 Retrofit Kits (Switchboards)
- DES-121 – Time Current Curve - Fusible Switches,
 HPC New Generation, Ground
 Fault Protection
- DES-122 – Time Current Curve - Fusible Switches,
 HPC New Generation, Instantaneous

*Trademark of General Electric Company

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.