


MULTIPLE OF LONG-TIME PICKUP

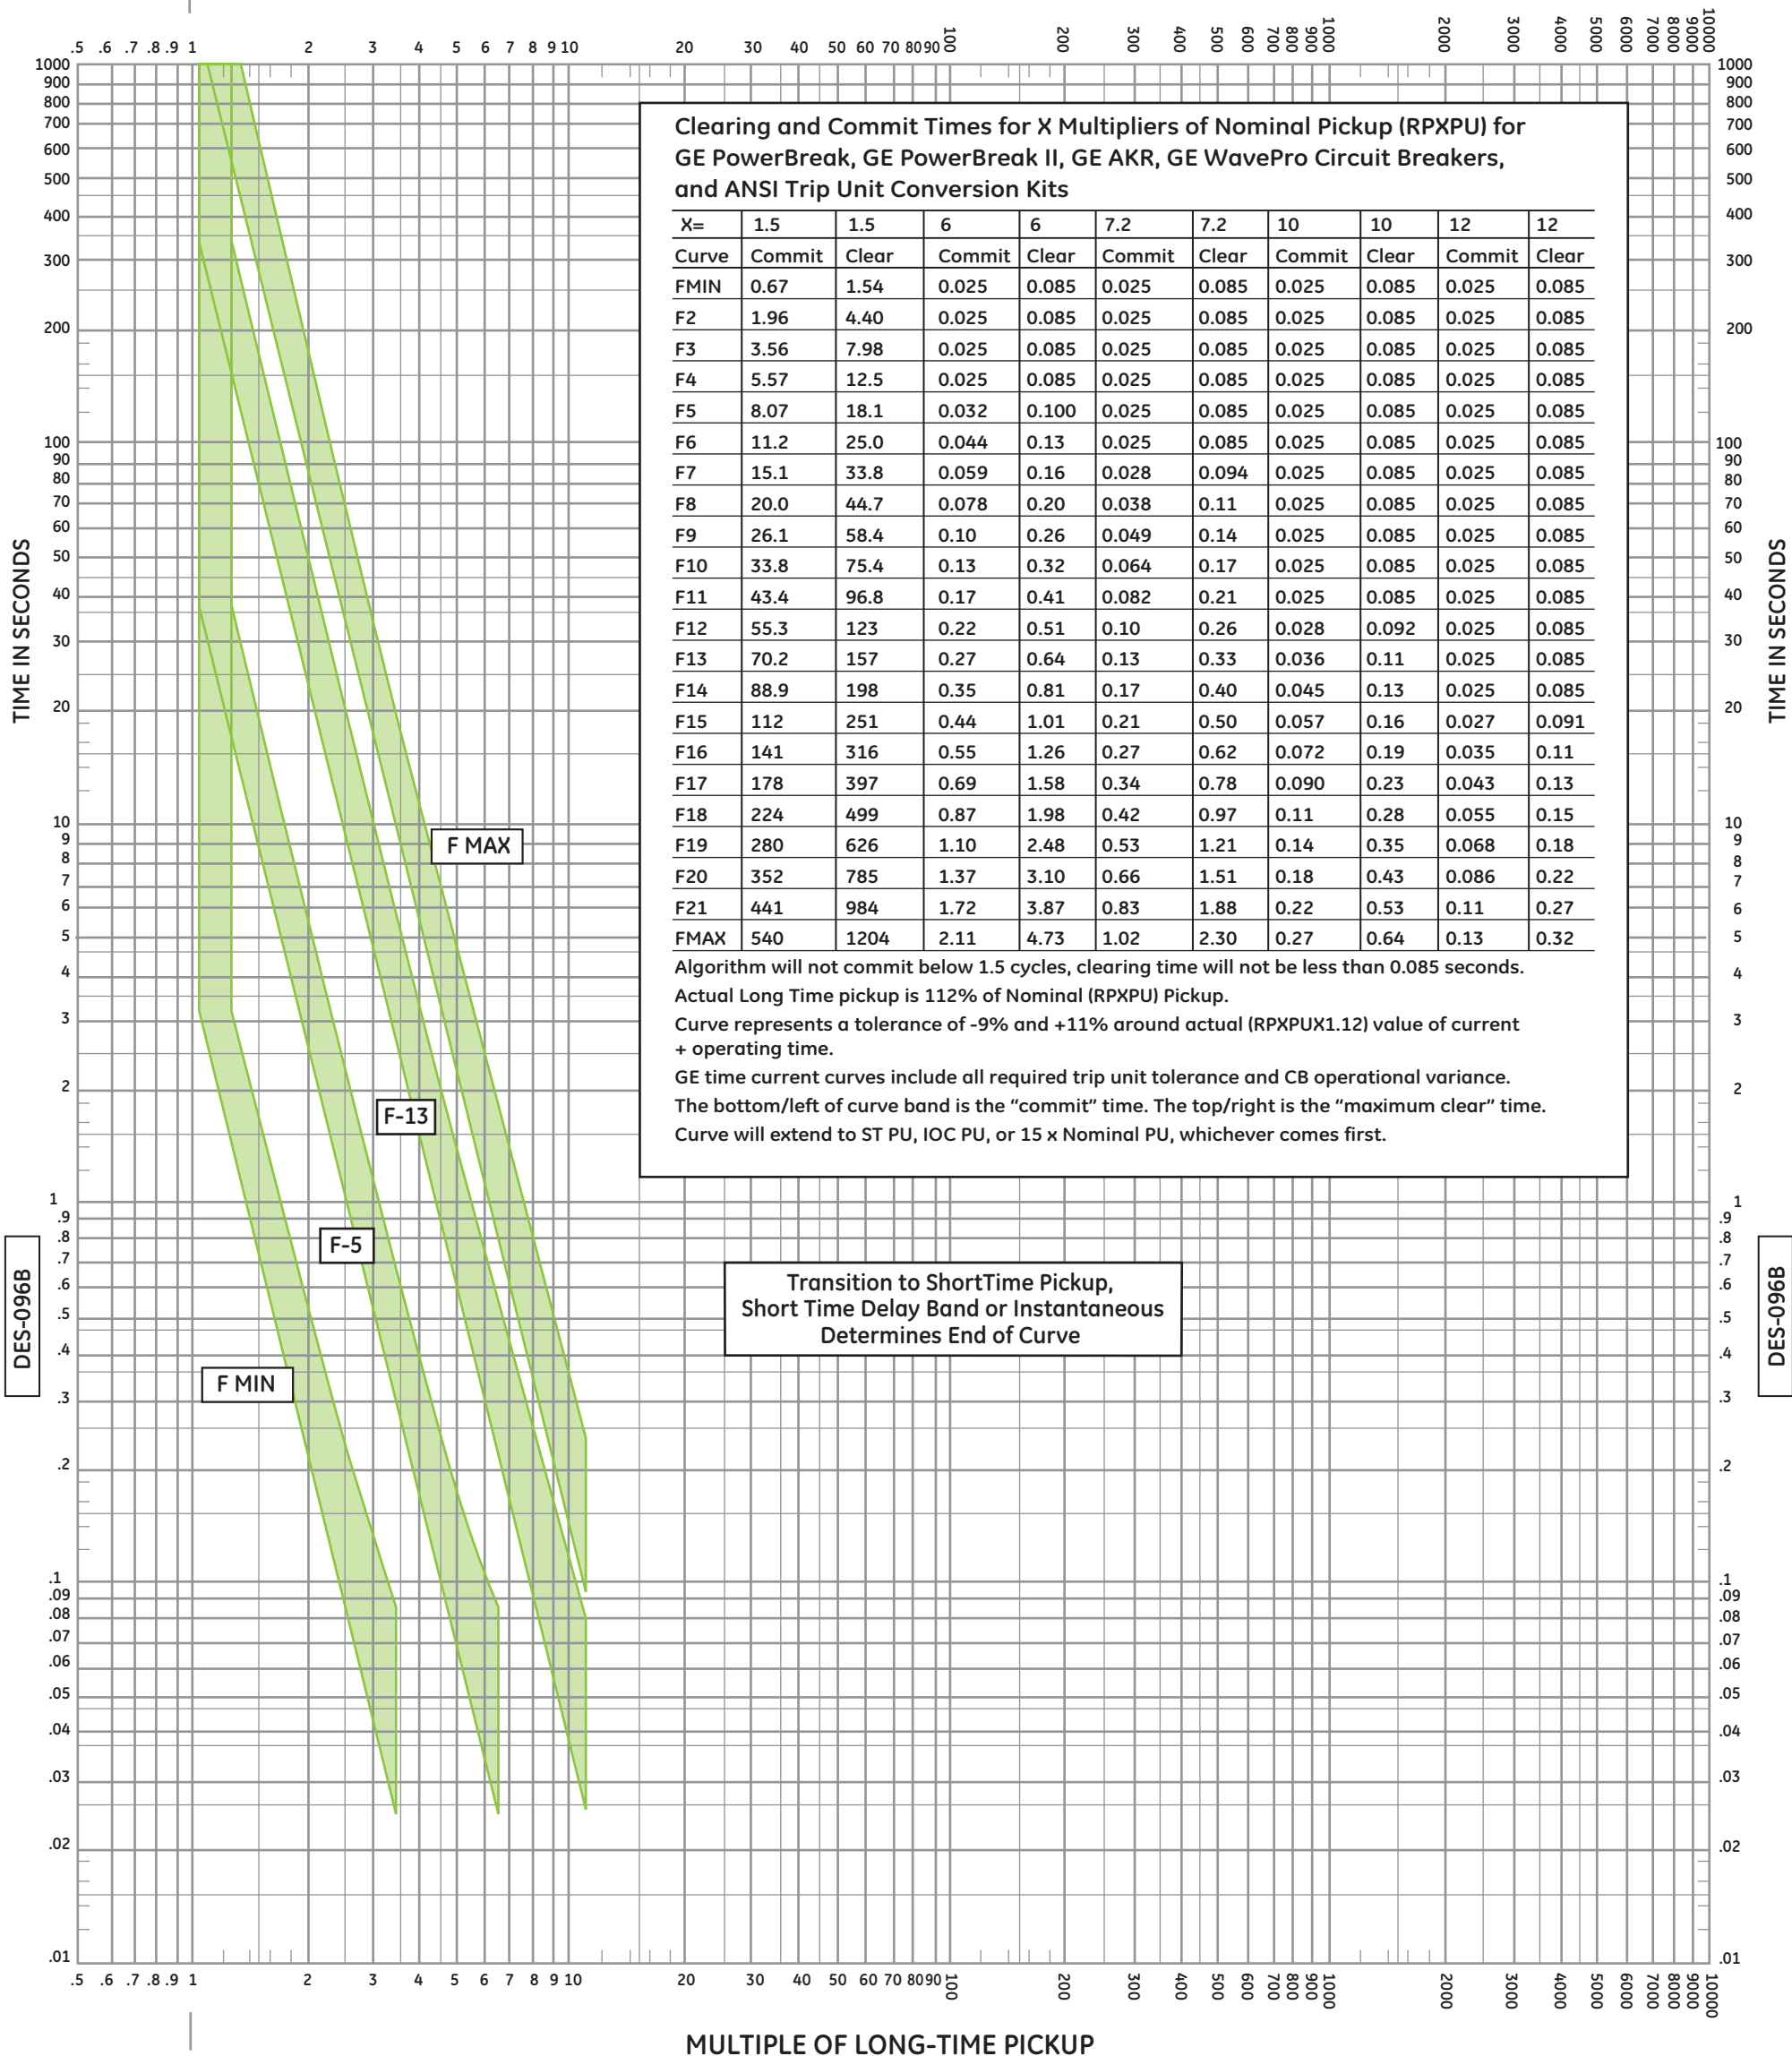

Frames 800-5000A AKR & WavePro
 Frames 800-4000A PowerBreak & PowerBreak II
 Trip Unit Conversion Kits 800-5000A

All Voltages: 600 Vac and below

Low-Voltage Circuit Breakers

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR and WavePro Circuit Breakers
 UL489 and UL1066 Stored Energy Mechanism Circuit Breakers
 ANSI Trip Conversion Kits
 Long-Time Fuse Like (I⁴t) Characteristics

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

DES-096B

Nominal Pickup Range
 0.5X-1.0X Trip Rating Plug