



MULTIPLE OF LONG-TIME PICKUP

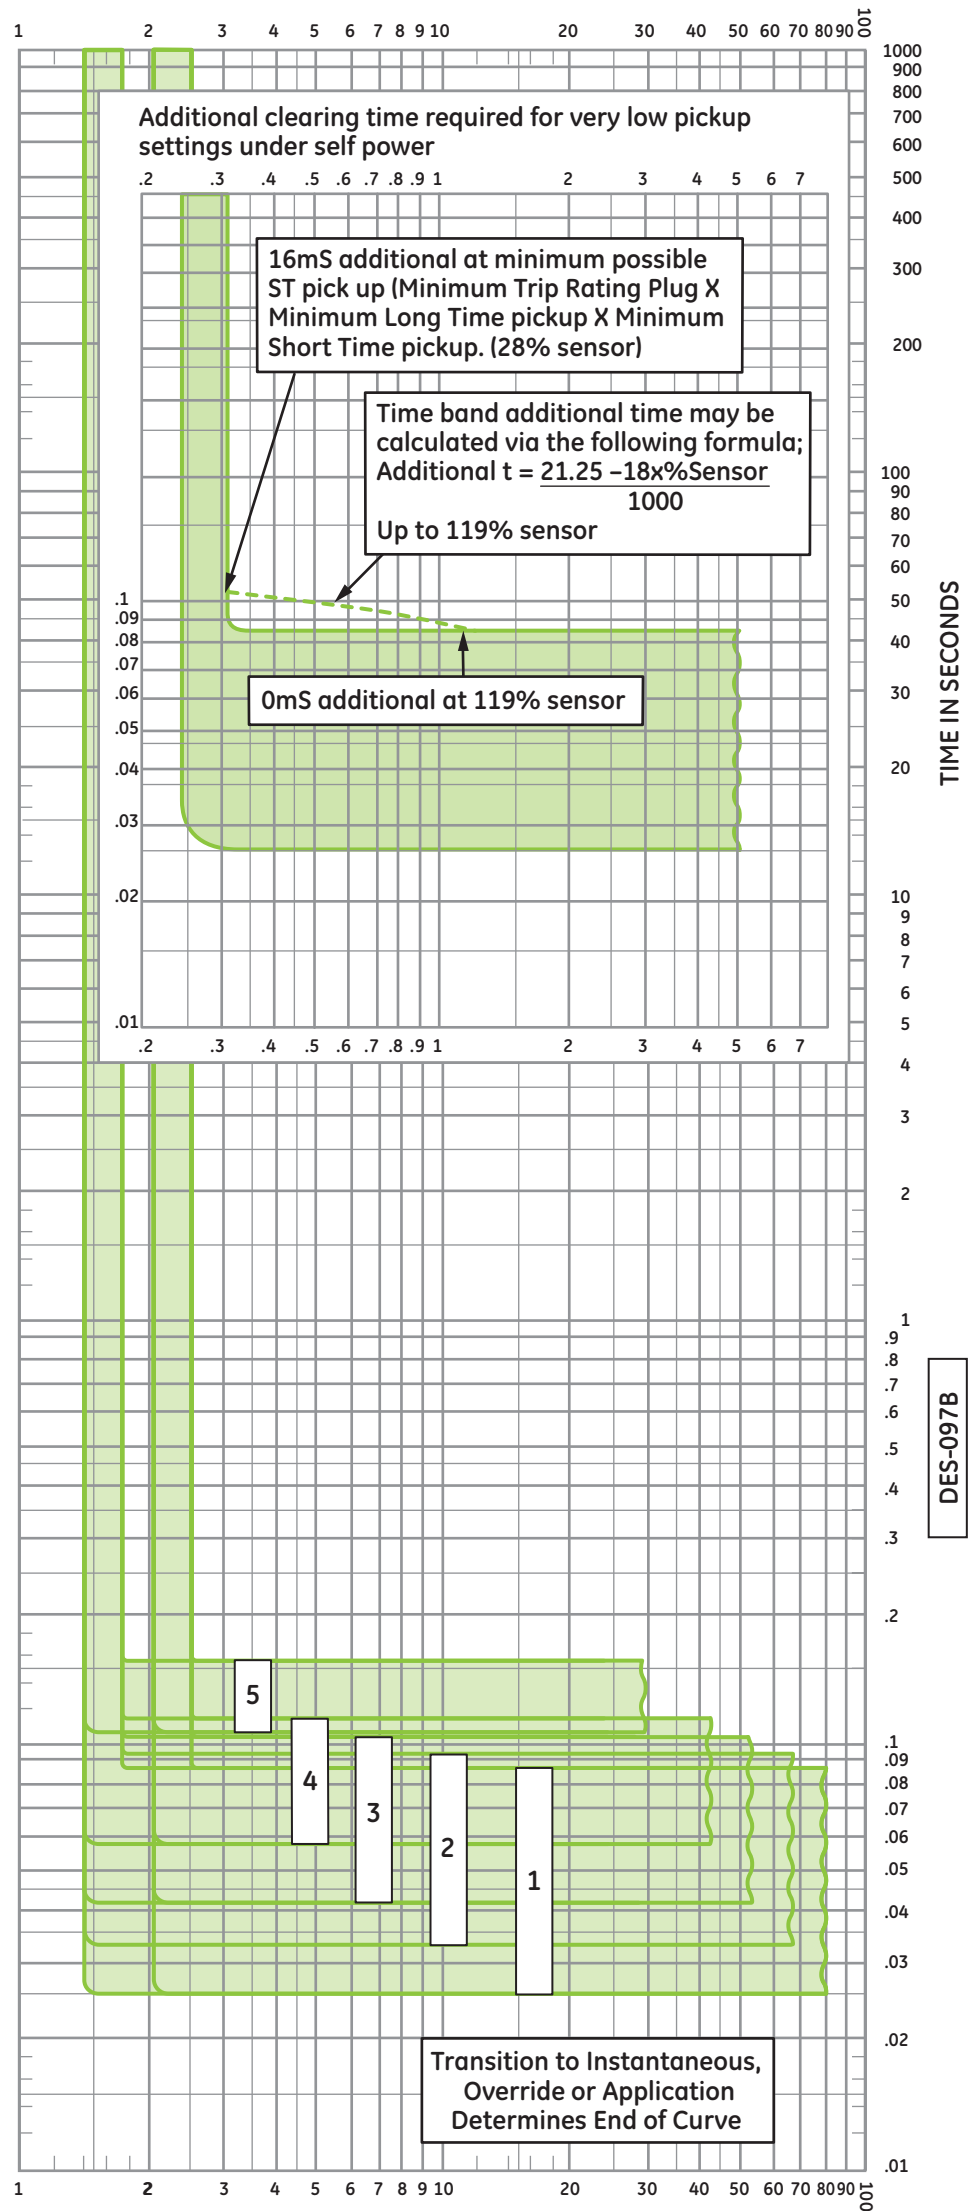

MULTIPLE OF LONG-TIME PICKUP

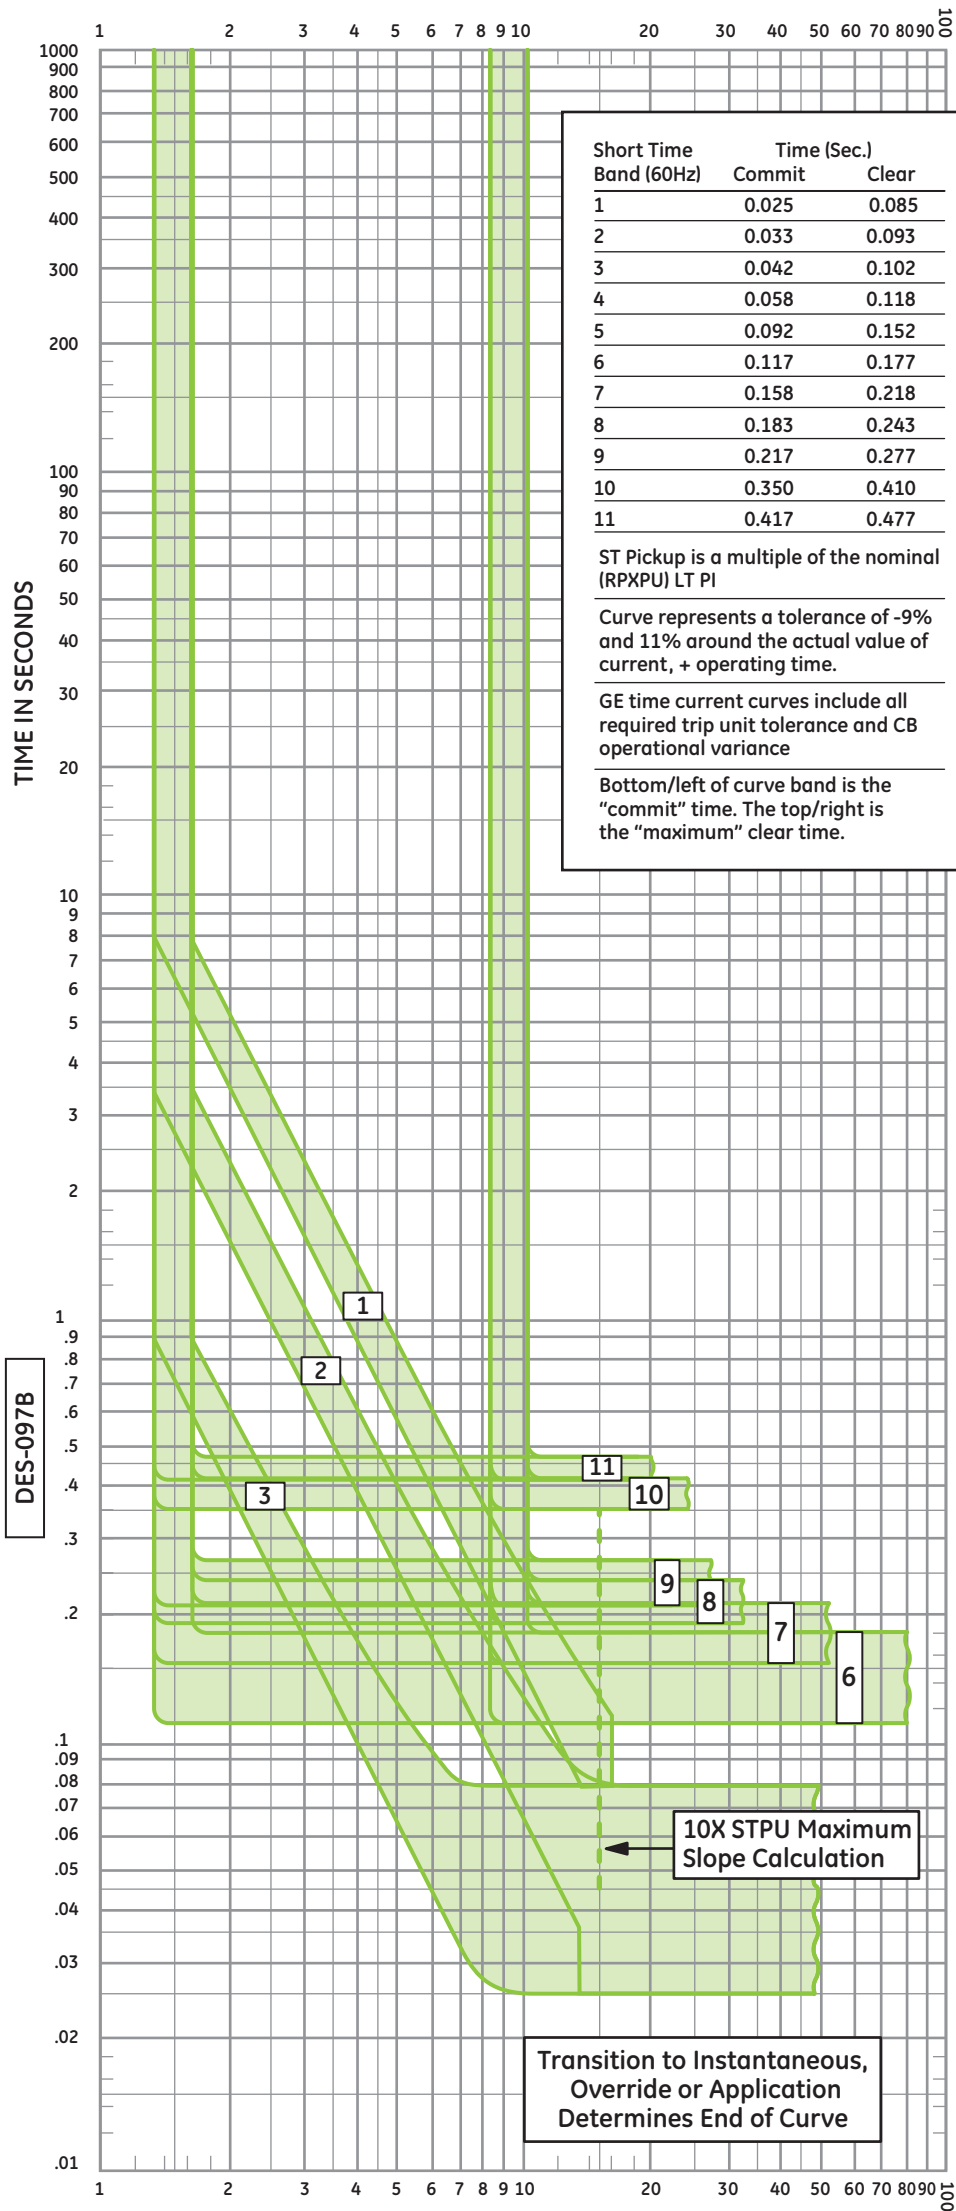

Frames	800-5000A	AKR & WavePro
		PowerBreak & PowerBreak II
Frames	800-4000A	PowerBreak II
Trip Unit Conversion kits	800-5000A	

All Voltages: 600 Vac and below

Low-Voltage Circuit Breakers

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR & Wavepro Circuit Breakers
 UL489 and UL1066 Stored Energy Mechanism Circuit Breakers
 ANSI Trip Conversion Kits
 Short-Time Pickup and Delay Bands

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

DES-097B

Pickup Range
 1.5X - 9X nominal Long Time Pickup, up to and including the 4000A frame
 1.5X - 7X nominal Long Time Pickup, 5000A AKR and WavePro