


MULTIPLE OF TRIP RATING PLUG

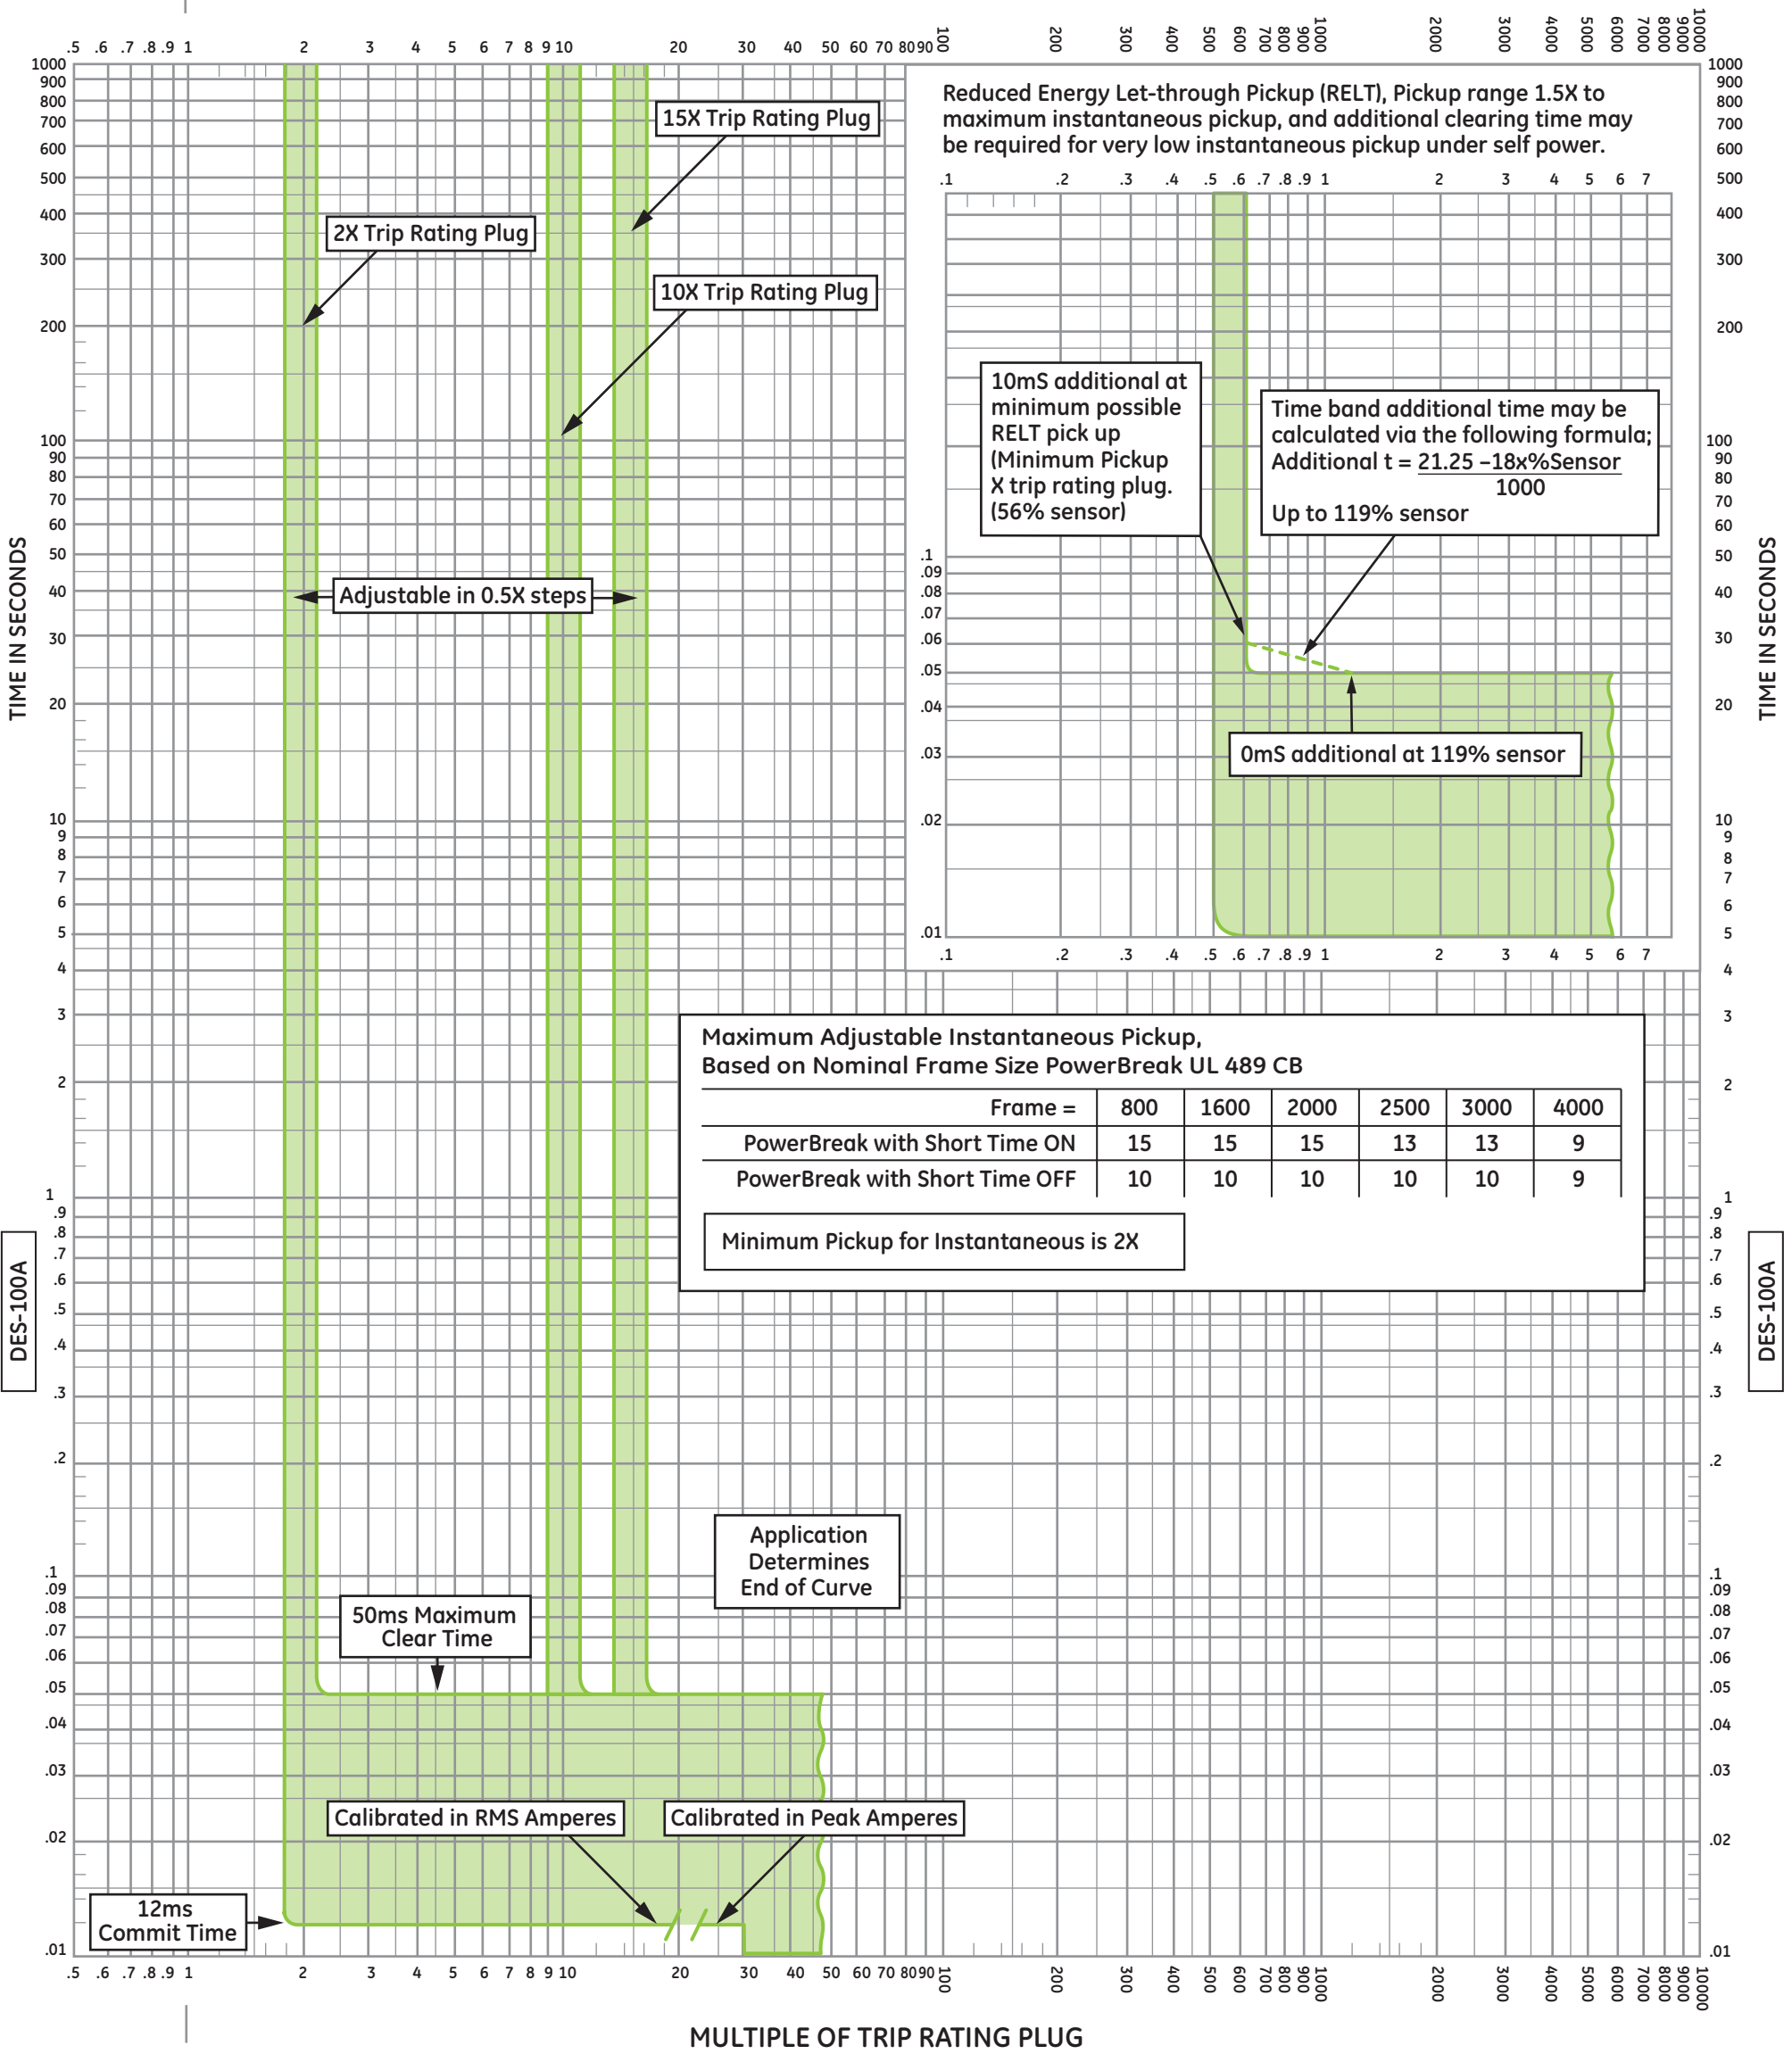

Low-Voltage Circuit Breakers

DES-100A

Frames 800-4000A PowerBreak

EntelliGuard TU trip unit for PowerBreak II Circuit Breakers UL 489 Stored Energy Mechanism Circuit Breakers

Adjustable Instantaneous Minimum Pickup 2X Rating Plug
Adjustable Instantaneous RELT Minimum Pickup 1.5X Rating Plug

All Voltages: 600 Vac and below

Adjustable Selective Instantaneous Trip

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.