



MULTIPLE OF SENSOR

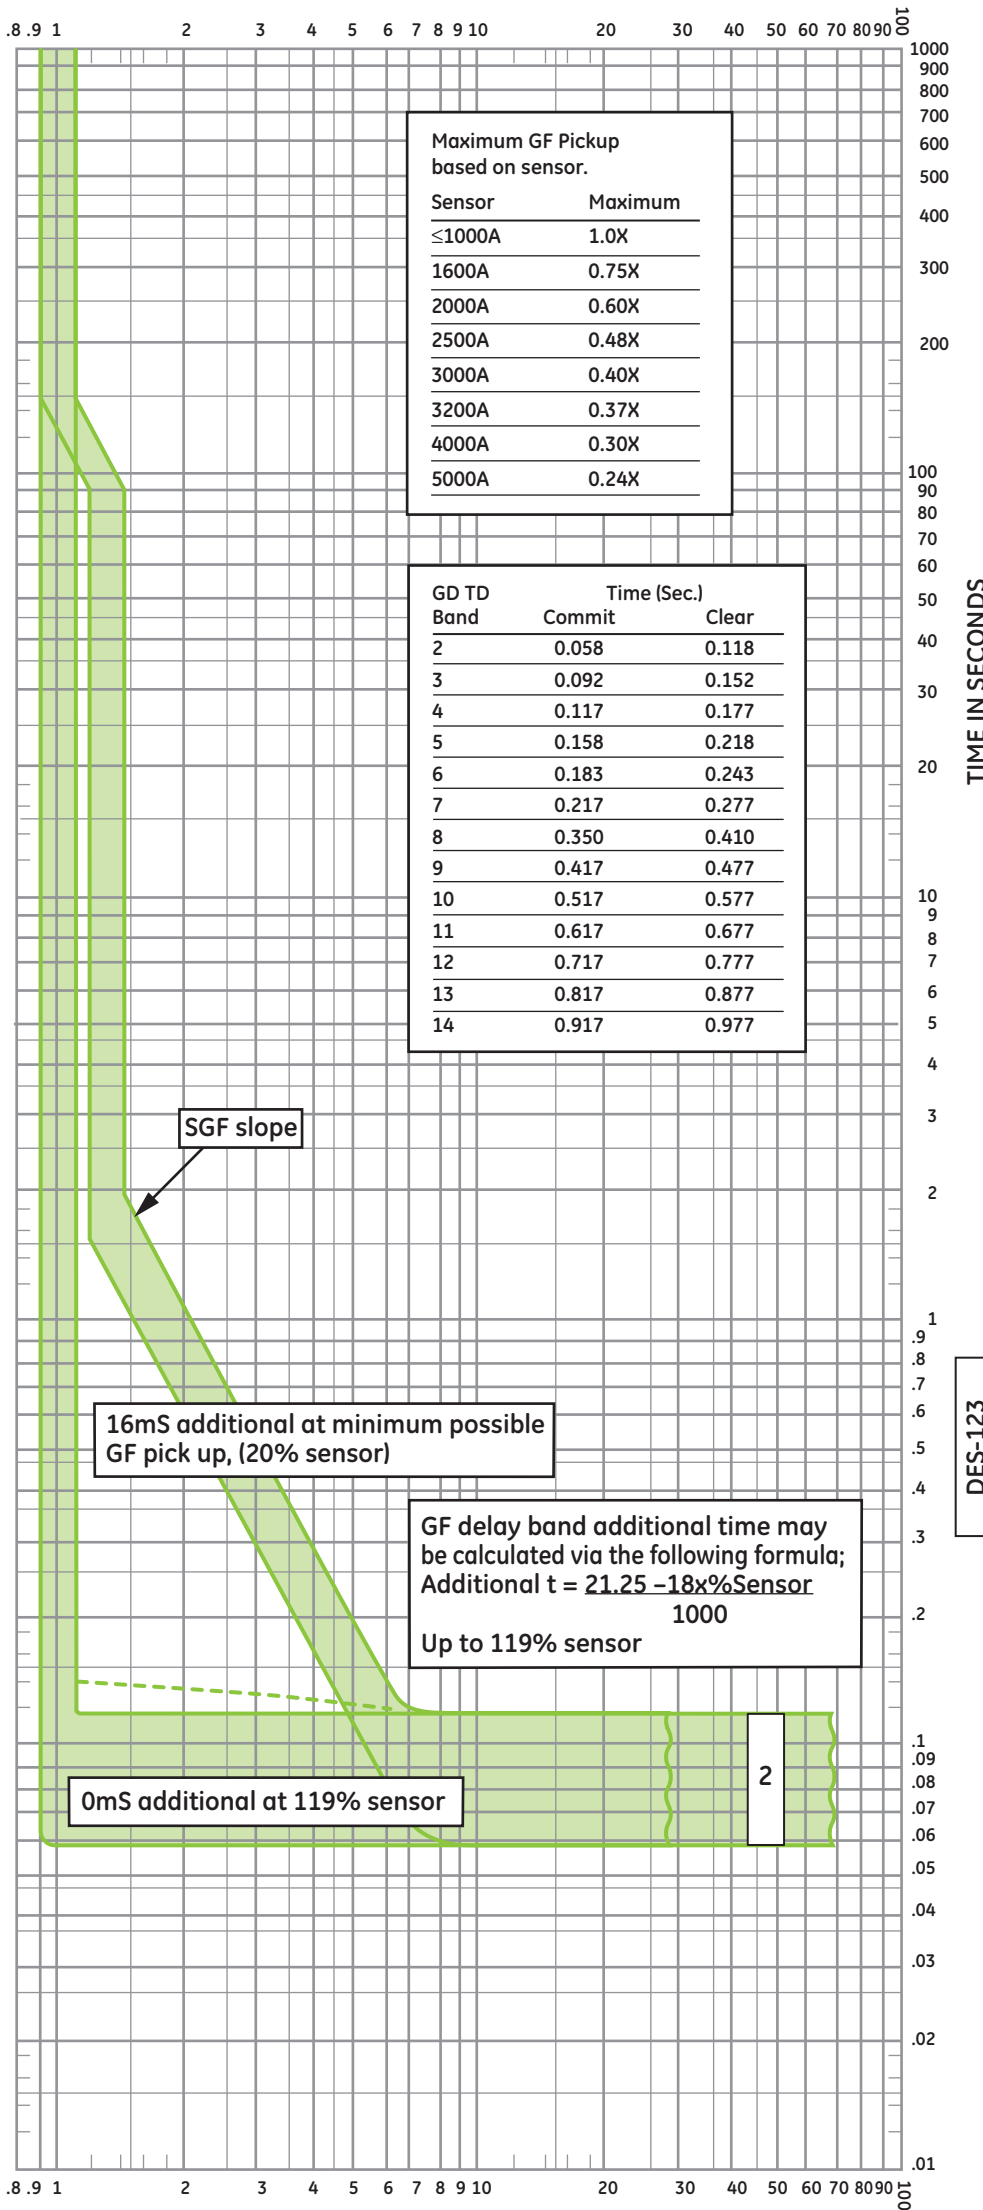

MULTIPLE OF SENSOR

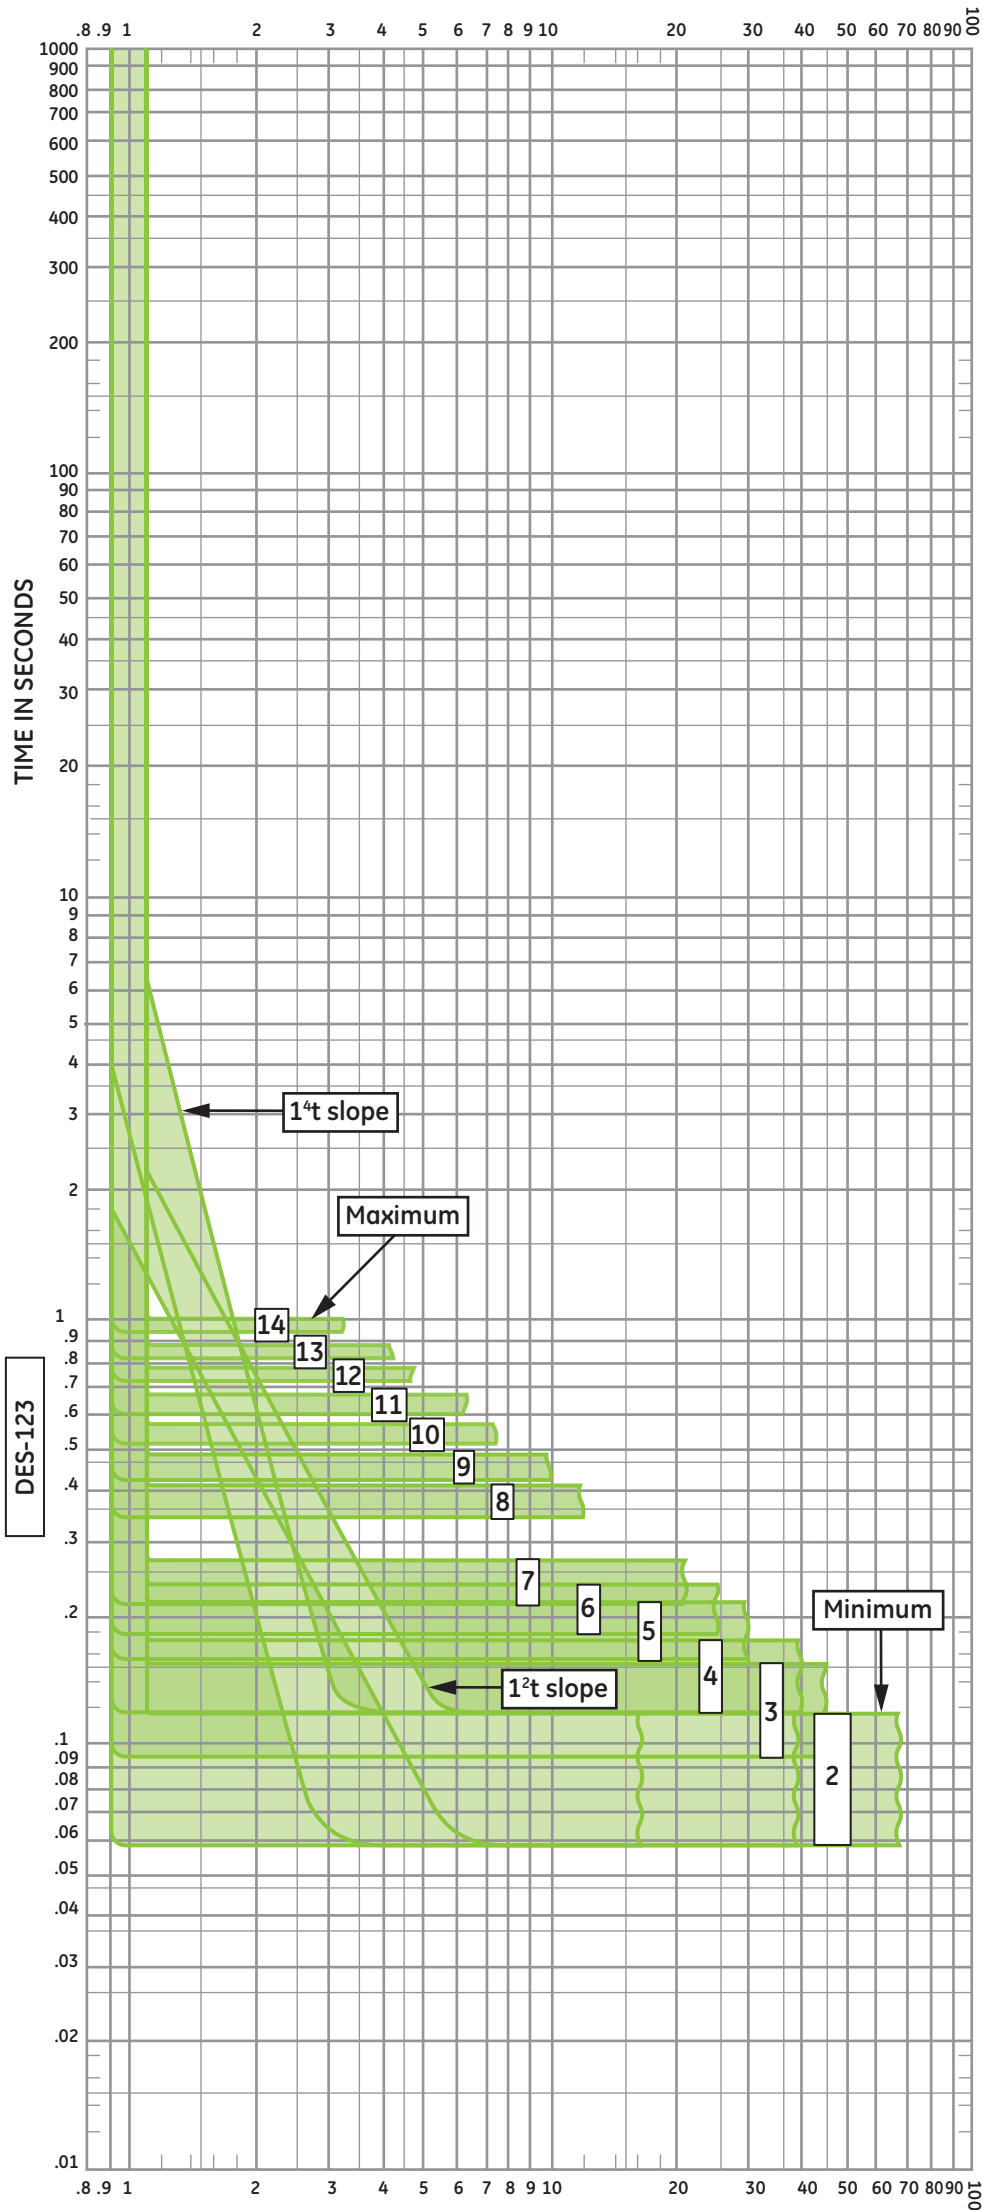

Frames 800-5000A AKR & WavePro
Frames 800-4000A PowerBreak & PowerBreak II

Trip Unit Conversion kits
 800-5000A

All Voltages: 600 Vac and below

Low-Voltage Circuit Breakers

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR and WavePro Circuit Breakers
 UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

Ground Fault

Applies to Trip Unit Software version 08.00.26 and later

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

DES-123

Pickup Range

Minimum 0.2X Sensor
 Maximum up to 1.0X Sensor
 Not to exceed 1200A