GE Consumer & Industrial
Electrical Distribution

PowerMark Gold™ Meter Socket Load Center 200 Amp, 24/42 Circuit

- 42 space breaker capacity
- Side-hinged door
- Better-sealing, adjustable flange kit for 4" and 6" walls
- Offset incoming utility knockout prevents conduit from pushing the wall out
- Improved temporary pole mounting
- Increase to 125A maximum subfeed breaker
- Greater flexibility on mounting height
- NEMA 3R cap for surface mount option

- Single phase, three wire, 120/240 VAC, 22 kAIC rated
- UL Listed (UL Standards No. 67 for Panelboards)
- 60°C/75°C conductor rating
- Suitable for use as Service Entrance Equipment when installed in accordance with the National Electrical Code

imagination at work

PowerMark Gold™ Meter Socket Load Center
200 Amp 24/42 Circuit

Catalog Number	**TSM2420UF42**
Main Amp Rating	200A
Enclosure Type	Outdoor (NEMA 3R)
Front Type	Semi-flush
Ringless	No
Bypass	None
Agency Certification	UL, EUSERC
Utility Incoming	UG
Service Disconnect	THQMV Breaker Factory Installed
Equipment Ground Kit	TGK12 (Order Separately)

1" Spaces		1/2" Spaces		Total 1 Pole Spaces	Box R31 Enclosure Dimensions (inches)			Main Wire Size (AWG/kcmil) Cu-Al
1 Pole	2 Pole	1 Pole	2 Pole		Width	Height	Depth	
24	12	36	18	42	16 3/4	34 1/4	7 5/16	1-4/0

Knockouts

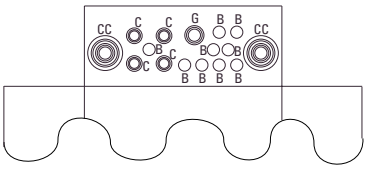

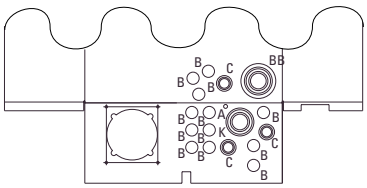

	Symbol						
	A	B	C	G	K	BB	CC
Conduit Size in Inches	9/32	–	–	–	–	–	–
	–	–	3/8	–	–	–	–
	–	1/2	1/2	1/2	–	–	1/2
	–	–	3/4	3/4	3/4	3/4	3/4
	–	–	–	1	1	1	1
	–	–	–	–	1 1/4	1 1/4	1 1/4
	–	–	–	–	1 1/2	1 1/2	1 1/2
	–	–	–	–	–	2	2

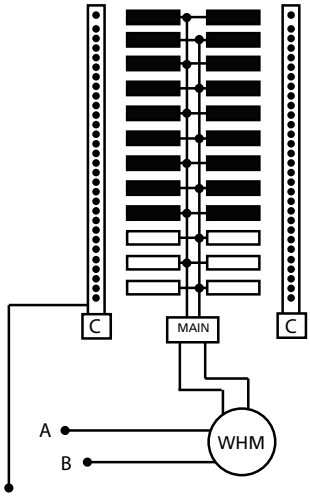

See GEH-40537 for instructions on how to remove the crossbar to isolate the ground and neutral bars.

Breaker Symbol	Breaker Fill	
	1" THQL	1/2" THQP
▭	1	—
▬	1	2

GE Consumer & Industrial
41 Woodford Avenue, Plainville, CT 06062
www.geelectrical.com

© 2005 General Electric Company

imagination at work