


MULTIPLES OF GROUND FAULT PICKUP SETTING

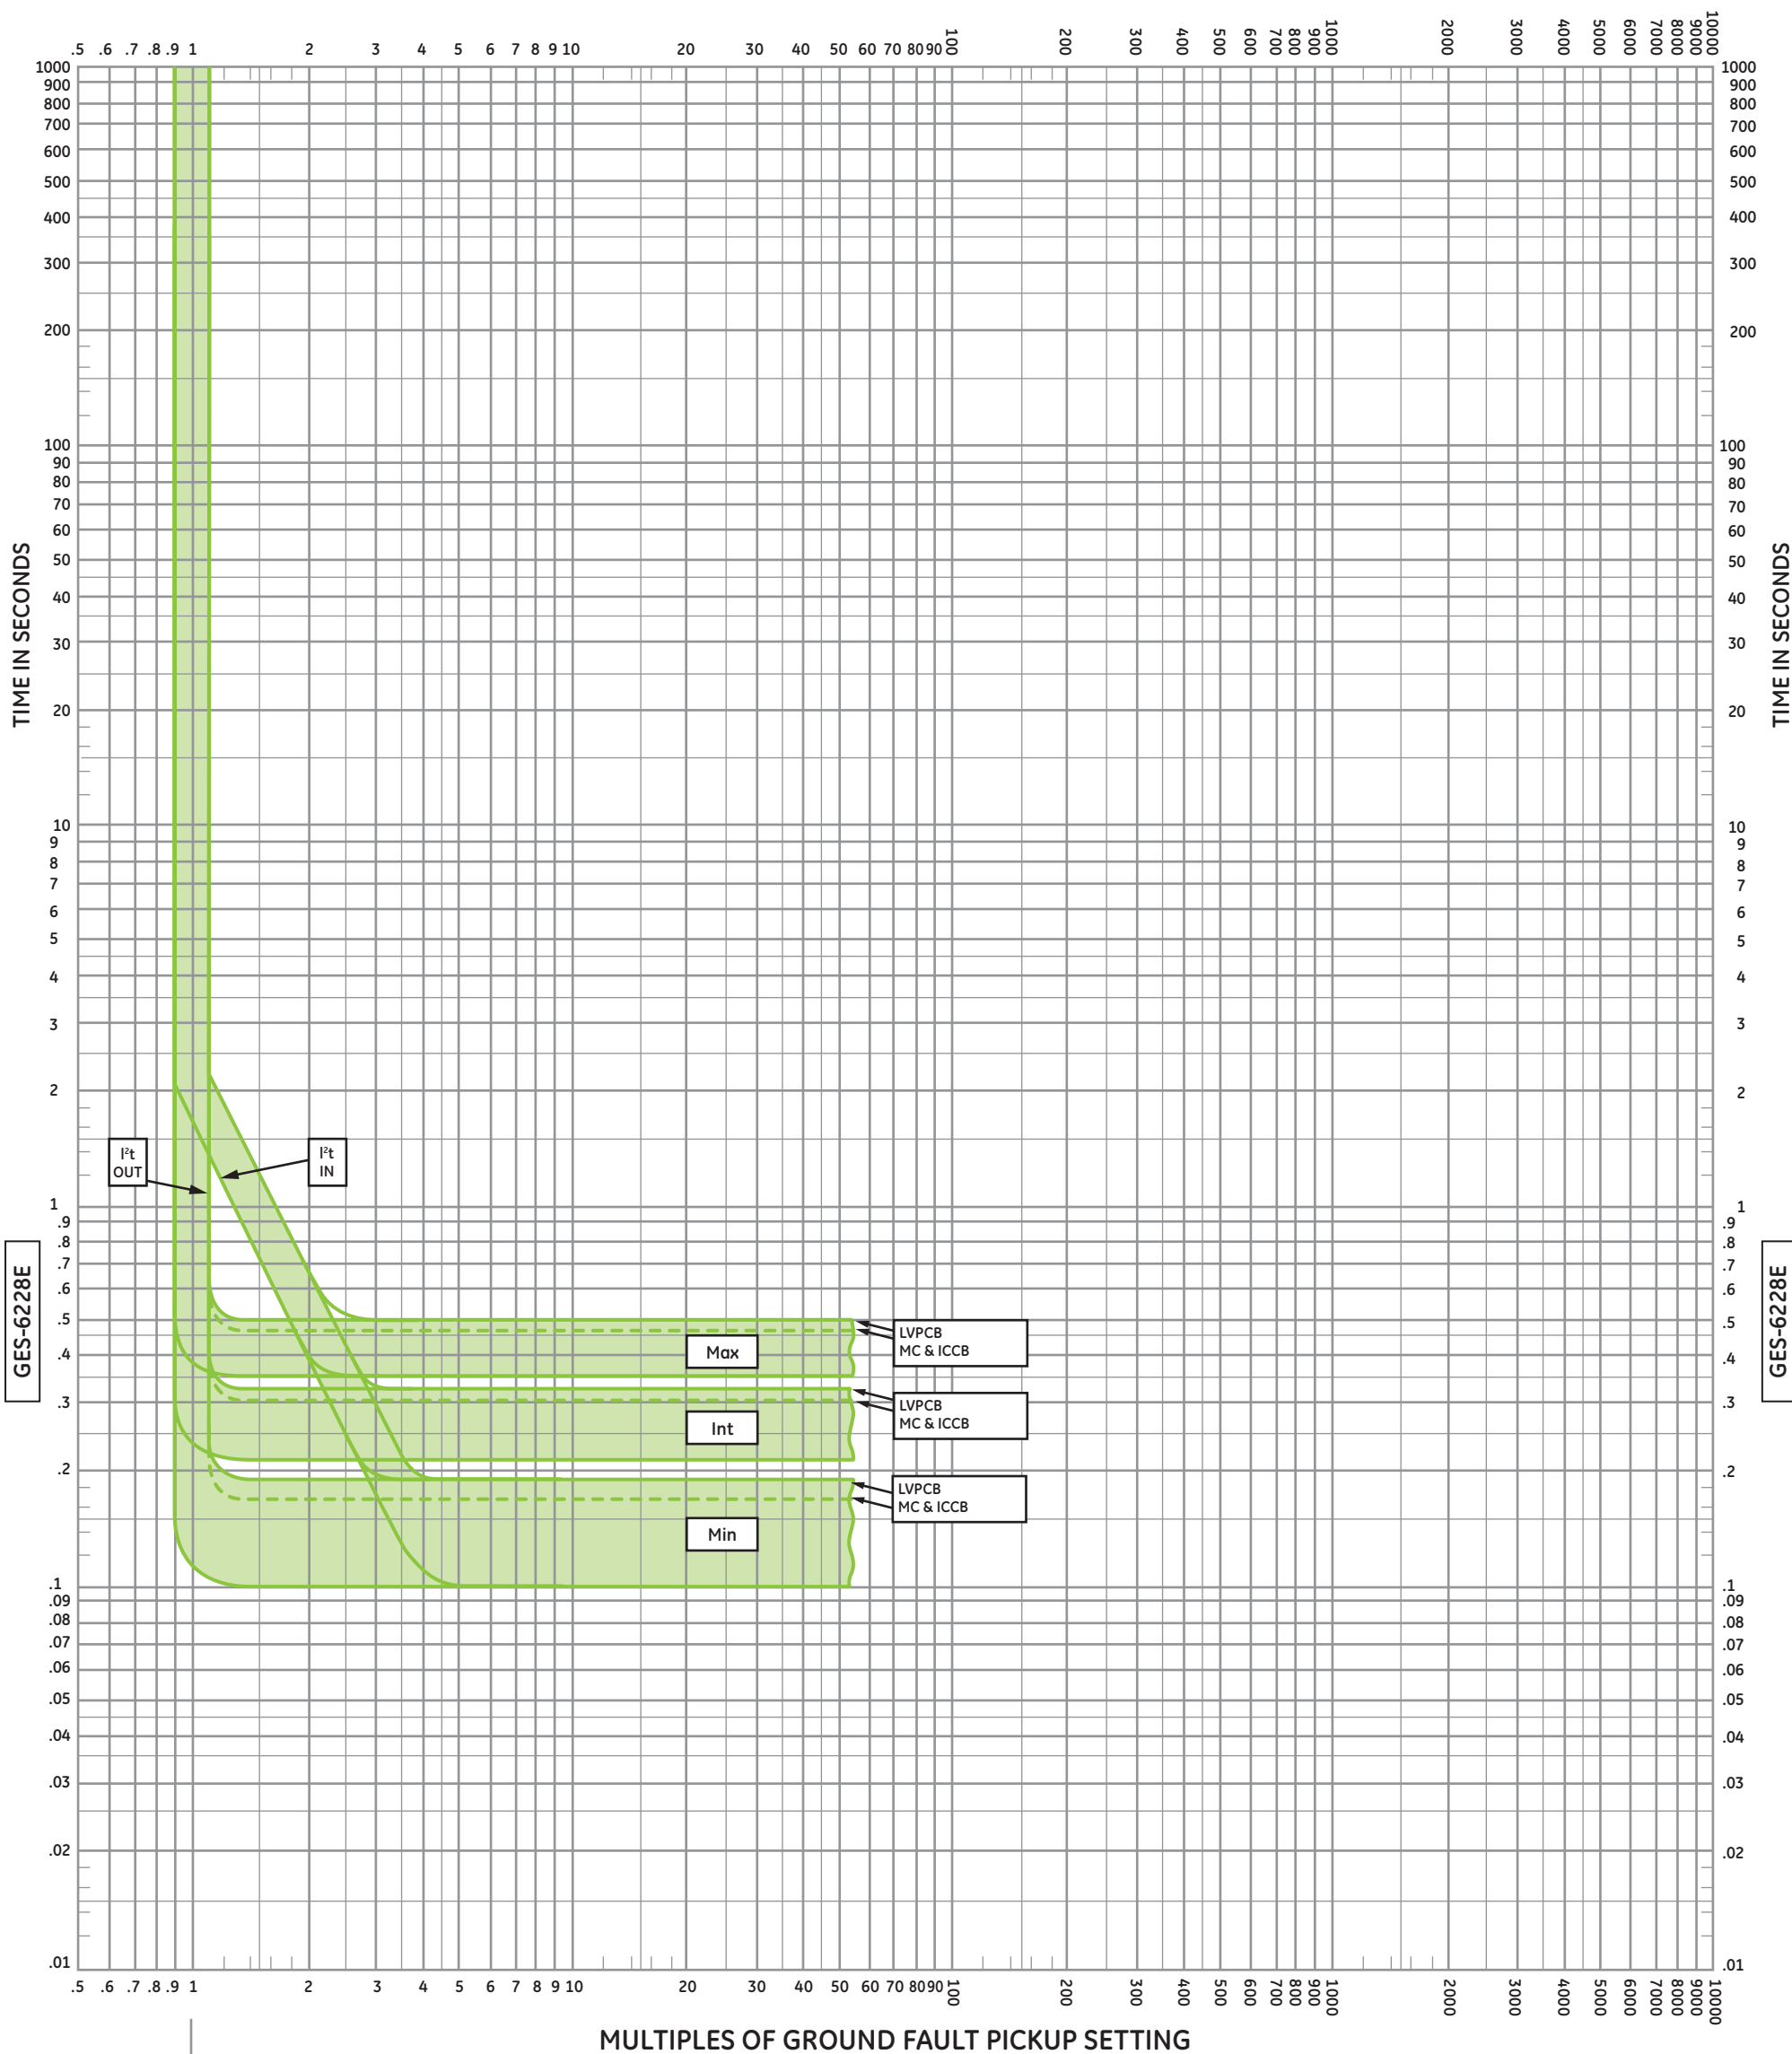

GE Consumer & Industrial - Electrical Distribution

Available Ratings (Amperes)

Type	Breaker Model		Current Sensor (S)
	Model	Frame	
MCCB	TJH/TJL	400	150, 300, 400
		600	600
	TKH/TKL	800	800
ICCB	TP/THP/TC/THC	1200	1200
		800	200, 400, 800
		1600	1000, 1600
		2000	2000
		2500	1000, 2000, 2500
		3000	3000
LVPCB	AKR-30S/30H/30L	4000	4000
		800	150, 400, 800
		1600	800, 1600
		2000	2000
		3200	3200
	AKR-75	3200	3200
	AKR-100	4000	4000

S: Current Sensor Amps
Voltage Ratings: 600 Vac, 50 through 400 Hertz

Low Voltage Power Circuit Breakers Type AKR

Insulated Case Circuit Breakers Types TP, THP, TC, THC

Molded Case Circuit Breakers Types TJH, TJL, THK, TKL

All with MicroVersaTrip™ RMS-9 or Epic MicroVersaTrip PM™

Curves apply at 50 through 400 Hertz and from -20°C to 55°C breaker ambient

Note: Operation above 60 Hertz requires thermal and interrupting derating of the circuit breaker.

GES-6228E

Programmer Adjustments

Ground Fault function:
Pickup settings in multiples of current sensor amps (S): 0.2, 0.25, 0.3, 0.3, 0.35, 0.4, 0.45, 0.5 and 0.6 for 150 thru 2000 amp sensors (S)
0.2, 0.22, 0.24, 0.26, 0.28, 0.30, and 0.37 for 2500 thru 3200 amp sensors (S)
0.2, 0.22, 0.24, 0.26, 0.28 and 0.30 for 4000 amp sensors (S)

Delay Bands: MIN, INT, MAX; I²t In/Out