


CIRCUIT BREAKER TERMINAL LUG DATA			
CIRCUIT BREAKER CAT NO. PREFIX	AMPERE RATING	LUG TYPE	WIRE SIZE (AWG/KCMIL)
TB6,TB8,TBC6,TBC8 TKM3,TKM8,THKM3,THKM8	800	TCAL81	(3) #3/0-500 CU-AL
	1200	TCAL121	(4) #250-350 CU (4) #250-500 AL
SKH,SKL,SKP	800	TCAL81	(3) #3-3/0-500 CU-AL
	1200	TCAL125	(4) #250-500 CU-AL

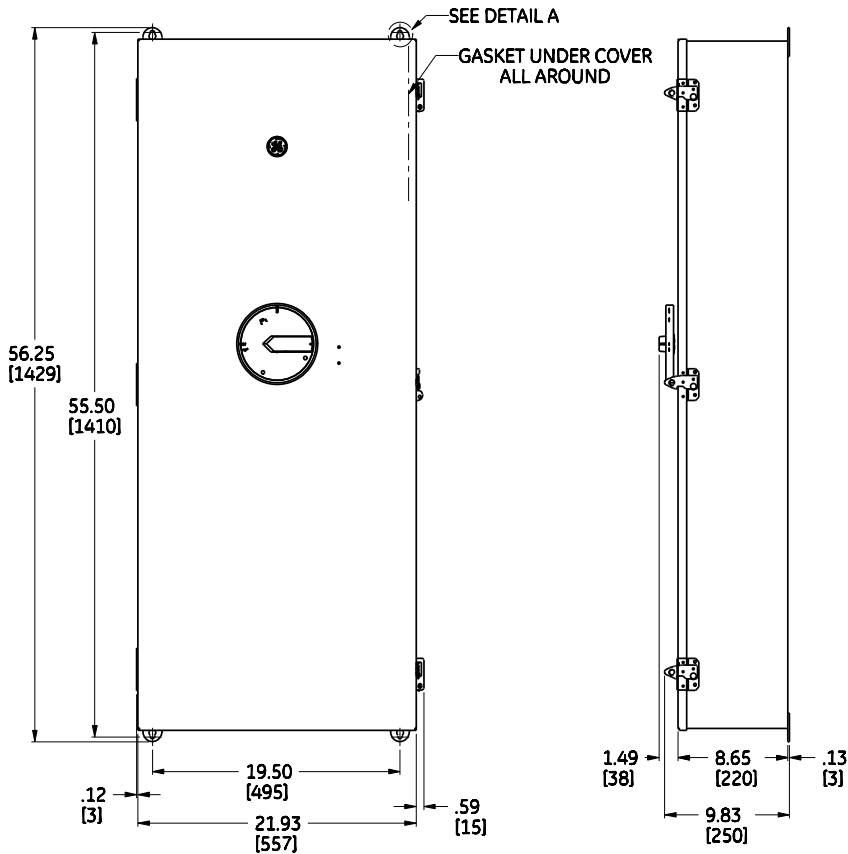

FIELD INSTALLABLE NEUTRAL ASSEMBLY AND GROUND KIT			
CAT NO. PREFIX	TYPE	AMPERE RATING	WIRE SIZE (AWG/KCMIL)
TGL6	GND KIT	600-1200A	(3) #2-250 CU-AL
TNIA400	NEUTRAL ASM	125-400A	(1) #4-600 CU-AL (2) #1/0-250 CU-AL
TNIA600	NEUTRAL ASM	225-600A	(2) #2/0-500 CU-AL
TNIA800	NEUTRAL ASM	500-800A	(3) #250-500 CU-AL
TNIA1200	NEUTRAL ASM	800-1200A	(4) #250-350 CU (4) #250-500 AL

MYERS TYPE CONDUIT HUBS	
CAT NO	NOMINAL CONDUIT DIAMETER IN INCHES
343L647G7	1 1/2
343L647G8	2
343L647G9	2 1/2
343L647G10	3
343L647G11	3 1/2
343L647G12	4
343L647G13	5
343L647G14	6

FOR USE WITH GE TYPE BREAKERS
TB6,TB8,TBC6 & TBC8
TKM3,TKM8,THKM3, & THKM8
SKH, SKL & SKP

DUAL DIMENSIONS INCHES
(MILLIMETERS)

- NOTES:
1. MATERIAL: LOW CARBON STEEL
 2. FINISH: ELECTROCOAT ENAMEL, GRAY
 3. AGENCY APPROVAL: UL LISTED -FILE E11592,CSA
 4. SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NEUTRAL ASSEMBLY IS INSTALLED
 5. THE SHORT CIRCUIT RATING OF THIS ENCLOSED CIRCUIT BREAKER IS EQUAL TO THE INTERRUPTING RATING, AT THE SUPPLY VOLTAGE MARKED ON THE CIRCUIT BREAKER INSTALLED
 6. CONSULT BUYLOG FOR ALTERNATIVE LUGS
 7. HUB MTG. HOLES TO BE PROVIDED BY CUSTOMER



imagination at work

OUTLINE DRAWING - NEMA TYPE 12/12K ENCLOSURE
TB800J, SK1200J

DWG NO.	DATE	REV
139C5682SH6	08/13/2009	03