


CIRCUIT BREAKER TERMINAL LUG DATA			
CIRCUIT BREAKER CAT NO. PREFIX	AMPERE RATING	LUG TYPE	WIRE SIZE (AWG/KCMIL)
SFHA, SFLA, SFPA	250	TCAL29 TCO29	(1) #8-350 CU-AL (1) #8-350 CU

FIELD INSTALLABLE NEUTRAL ASSEMBLY AND GROUND KIT			
CAT NO. PREFIX	TYPE	AMPERE RATING	WIRE SIZE (AWG/KCMIL)
TGL20	GND KIT	150-400A	(1) #6-2/0 CU-AL
TGL1	GND KIT	70-125A	(4) #14-8 CU (4) #12-8 AL (3) #14-4 CU (3) #6-4 AL
TNIA225	NEUTRAL ASM	70-225A	(1) #1-300 CU-AL

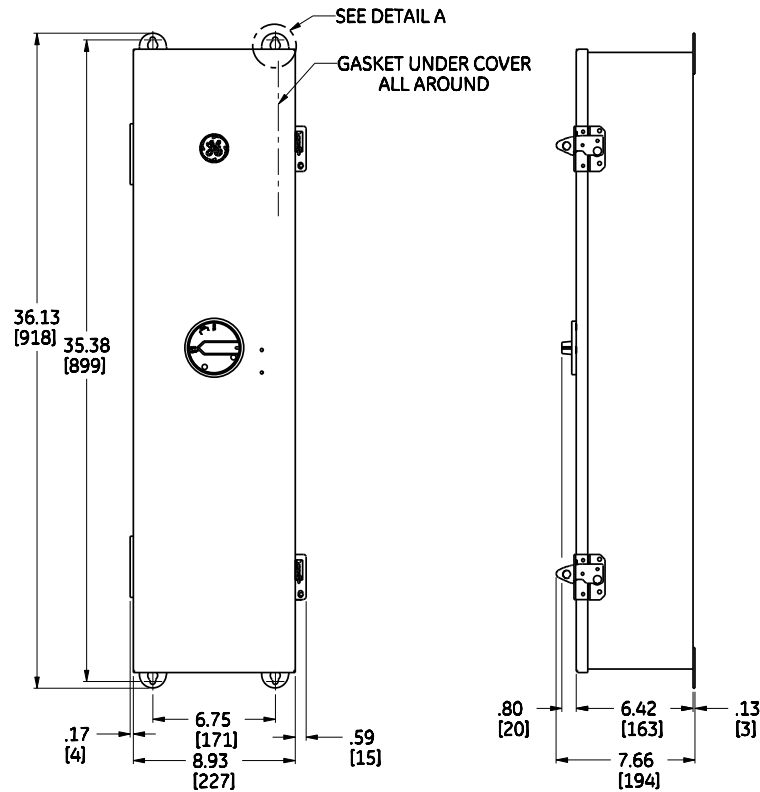

KNOCKOUTS				
SYMBOLS	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	3	76	3 1/2	89
B	2 1/2	64	3	76
C	2	51	2 1/2	64
D	1 1/2	38	2	51
E	1	25	1 3/8	35
F	3/4	19	1 1/8	29
G	1/2	13	7/8	22
H	9/32	7	9/32	7

MYERS TYPE CONDUIT HUBS	
CAT NO	NOMINAL CONDUIT DIAMETER IN INCHES
343L647G1	1/4
343L647G2	3/8
343L647G3	1/2
343L647G4	3/4
343L647G5	1
343L647G6	1 1/4
343L647G7	1 1/2
343L647G8	2
343L647G9	2 1/2
343L647G10	3

DUAL DIMENSIONS, INCHES [MILLIMETERS]

FOR USE WITH GE TYPE BREAKERS SFHA, SFLA & SFPA

- NOTES:
1. MATERIAL: LOW CARBON STEEL
 2. FINISH: ELECTROCOAT ENAMEL, GRAY
 3. AGENCY APPROVAL: UL LISTED -FILE E11592,CSA
 4. SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NEUTRAL ASSEMBLY IS INSTALLED
 5. THE SHORT CIRCUIT RATING OF THIS ENCLOSED CIRCUIT BREAKER IS EQUAL TO THE INTERRUPTING RATING, AT THE SUPPLY VOLTAGE MARKED ON THE CIRCUIT BREAKER INSTALLED
 6. CONSULT BUYLOG FOR ALTERNATIVE LUGS
 7. HUB MTG. HOLES TO BE PROVIDED BY CUSTOMER

imagination at work

OUTLINE DRAWING - NEMA TYPE 12/12K ENCLOSURE SF250D

DWG NO.	DATE	REV
208C2884SH1	08/14/2008	02