


DUAL DIMENSIONS INCHES [MILLIMETERS] (ESTIMATING ONLY)

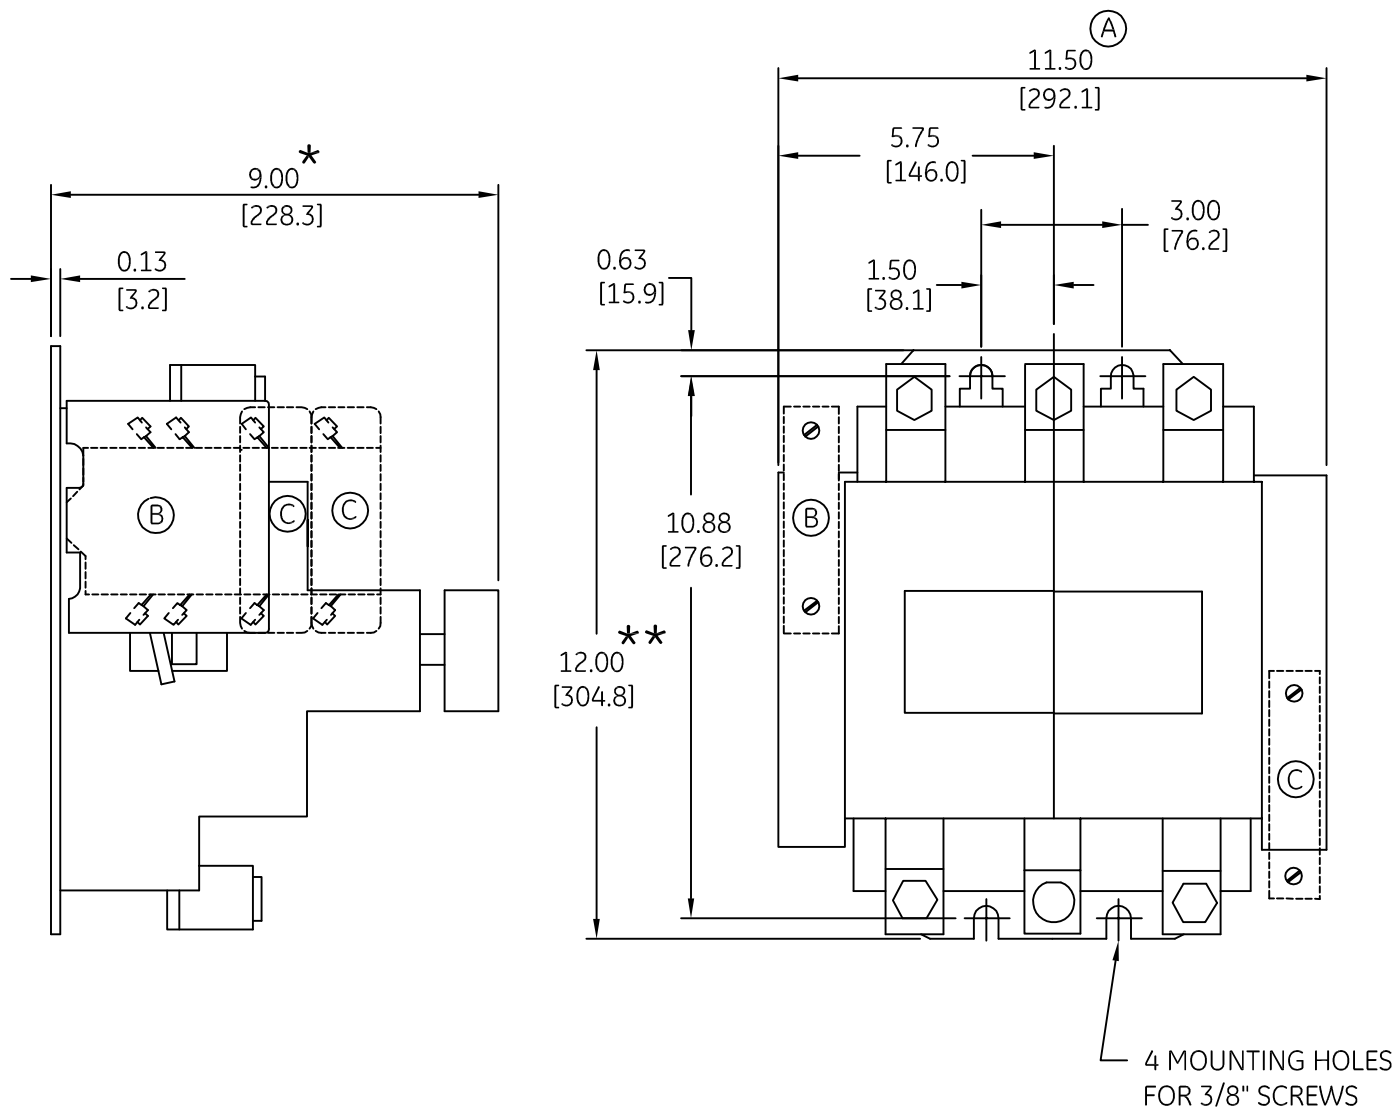

\* — ADD 0.25 [6.4] FOR ELECTRICAL CLEARANCE

\*\* — ADD 0.25 [6.4] AT TOP & 0.50 [12.7] AT BOTTOM FOR ELECTRICAL CLEARANCE

(A) — STANDARD 3 POLE CONTACTOR (CENTER POLE OMITTED ON 2 POLE FORMS)

(B) — STANDARD HOLDING INTERLOCK & AUXILIARY CONTACT (IF USED)

(C) — AUXILIARY CONTACTS (IF USED)



imagination at work

OUTLINE  
CR360L LIGHTING CONTACTOR OPEN

| AN #    | THIRD ANGLE PROJECTION | SHEET # |
|---------|------------------------|---------|
| 09-9107 |                        | 1 OF 1  |

| DWG NO.   | DATE       | REV |
|-----------|------------|-----|
| 55-193503 | 07/21/2009 | 1   |