


DUAL DIMENSIONS INCHES (ESTIMATING ONLY)
[MILLIMETERS]

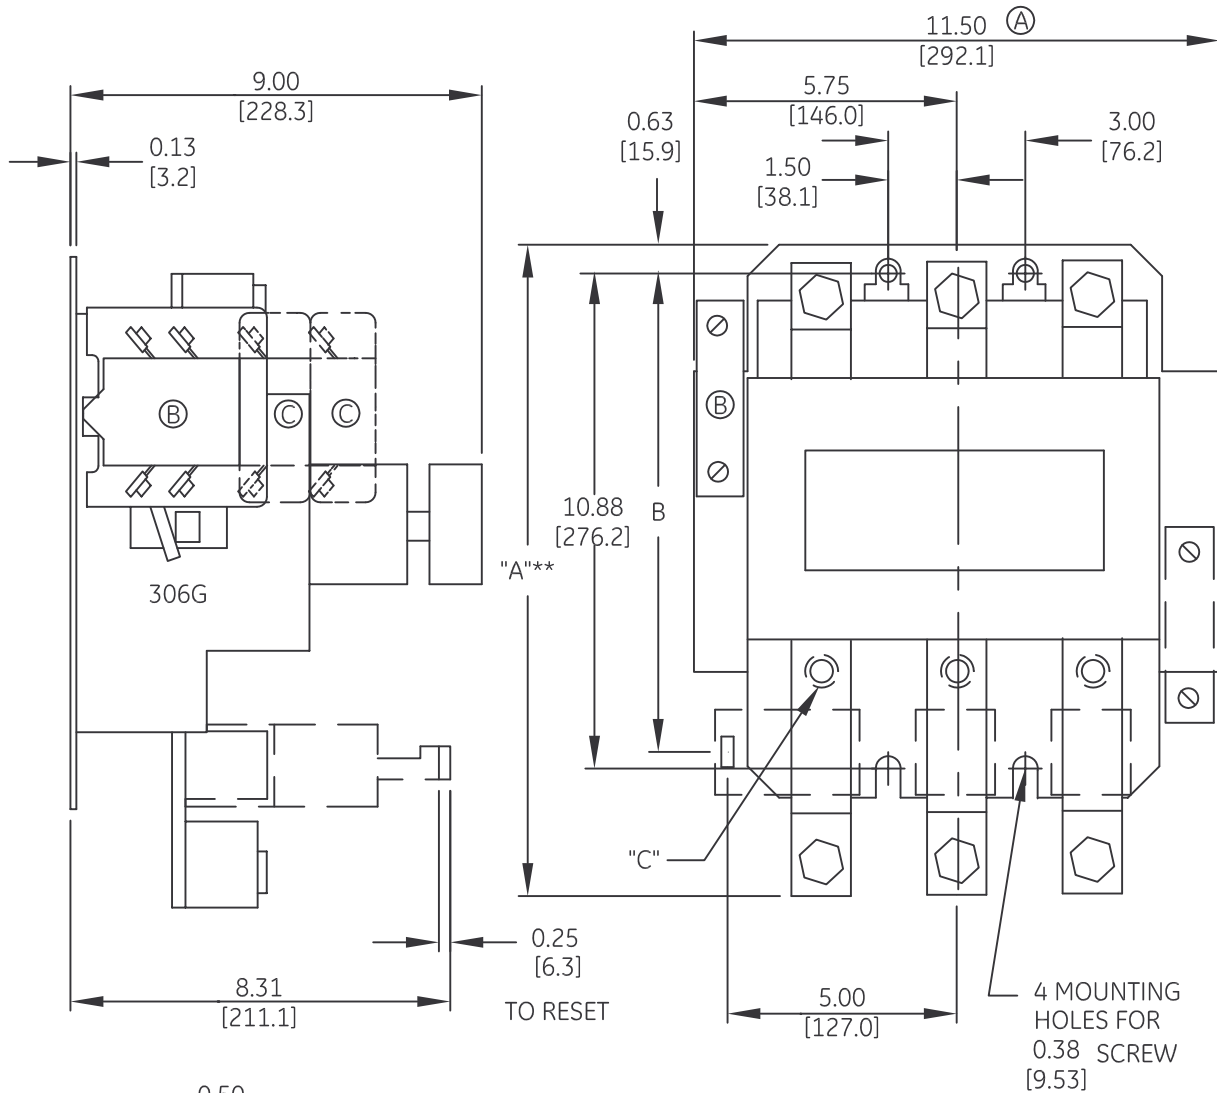

** ADD 0.50 [12.7] AT TOP AND BOTTOM FOR ELECTRICAL CLEARANCE.

- (A) STANDARD 3-POLE CONTACTOR OR STARTER.
- (B) STANDARD HOLDING INTERLOCK AND AUXILLARY CONTACT.
- (C) AUXILLARY CONTACTS (IF USED).

PART	DESCRIPTION	A	B	C
1	CR 305 CONTACTOR	12.00 [305.0]		
2	CR 306 STARTER	14.25 [362.0]	10.47 [266.0]	
3	CR 306 STARTER TAPPED BEHIND OVERLOADS	15.9 [404.0]	12.12 [308.0]	3/8-16 (3)
4	CR 306 STARTER TAPPED BEHIND OVERLOADS	17.44 [443.0]	13.66 [347.0]	3/8-16 (3)



imagination at work

OUTLINE
CR306G STARTER OPEN

AN #	THIRD ANGLE PROJECTION	SHEET #
09-9107		1 OF 1

DWG NO.	DATE	REV
55-206936	07/23/2009	4