
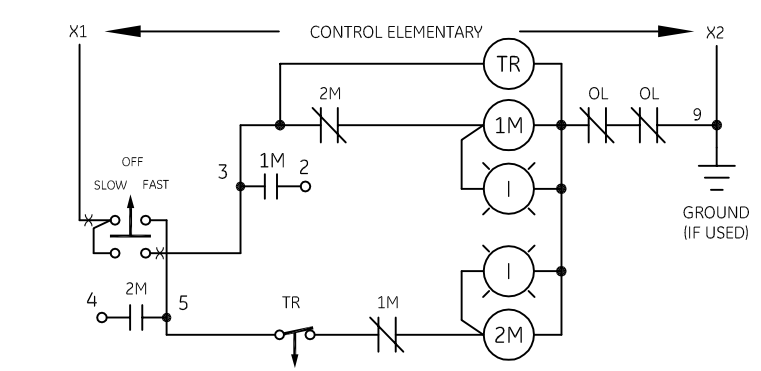


CONNECTION TABLE						
PANEL	A	B	C	D	E	F
MOTOR	T1	T2	T3	T6	T4	T5

INSTALL OVERLOAD HEATERS		
FOR	LOW SPEED	HIGH SPEED
IN	2OL	1OL

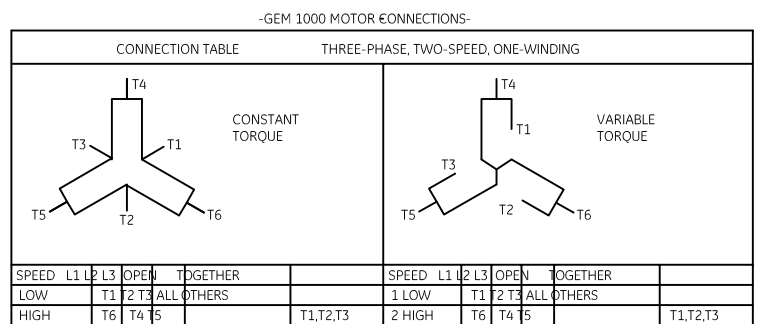

-NOMENCLATURE-
 1M&2M-SPEED CONTACTORS MECHANICALLY & ELECTRICALLY INTERLOCKED.
 OL-OVERLOAD RELAY
 TR-DECELERATING RELAY
 I-INDICATING LIGHT
 FU-FUSE
 X-INDICATES CONTACT CLOSED

NOTE: ADDITIONAL OVER-CURRENT PROTECTION MAY BE REQUIRED. REFER TO THE NATIONAL ELECTRICAL CODE OR LOCAL ELECTRICAL CODE AS REQUIRED.



	LINE	LOAD
USE 75°C, COPPER CONDUCTORS ONLY, FOR FIELD WIRING. TORQUE LINE AND LOAD TERMINALS AS SHOWN AT RIGHT:	CR309 20 LB-IN	20 LB-IN
	CR310 AS MARKED	20 LB-IN
	CR311 35 LB-IN	20 LB-IN
	CR390 AS MARKED	20 LB-IN

GROUND KIT

1/2-IN CONDUIT	55-213403G001
3/4-IN CONDUIT	55-213403G002
1-IN CONDUIT	55-213403G003
1 1/4-IN CONDUIT	55-213403G004
1 1/2-IN CONDUIT	55-213403G005
2-IN CONDUIT	55-213403G006
2 1/2-IN CONDUIT	55-213403G007
3-IN CONDUIT	55-213403G008




ALTERNATIVE LEGENDS FOR FAST AND SLOW ARE HIGH AND LOW.

EXTRA AUXILIARY CONTACTS MAY BE ADDED AT LOCATIONS X,Y & Z.

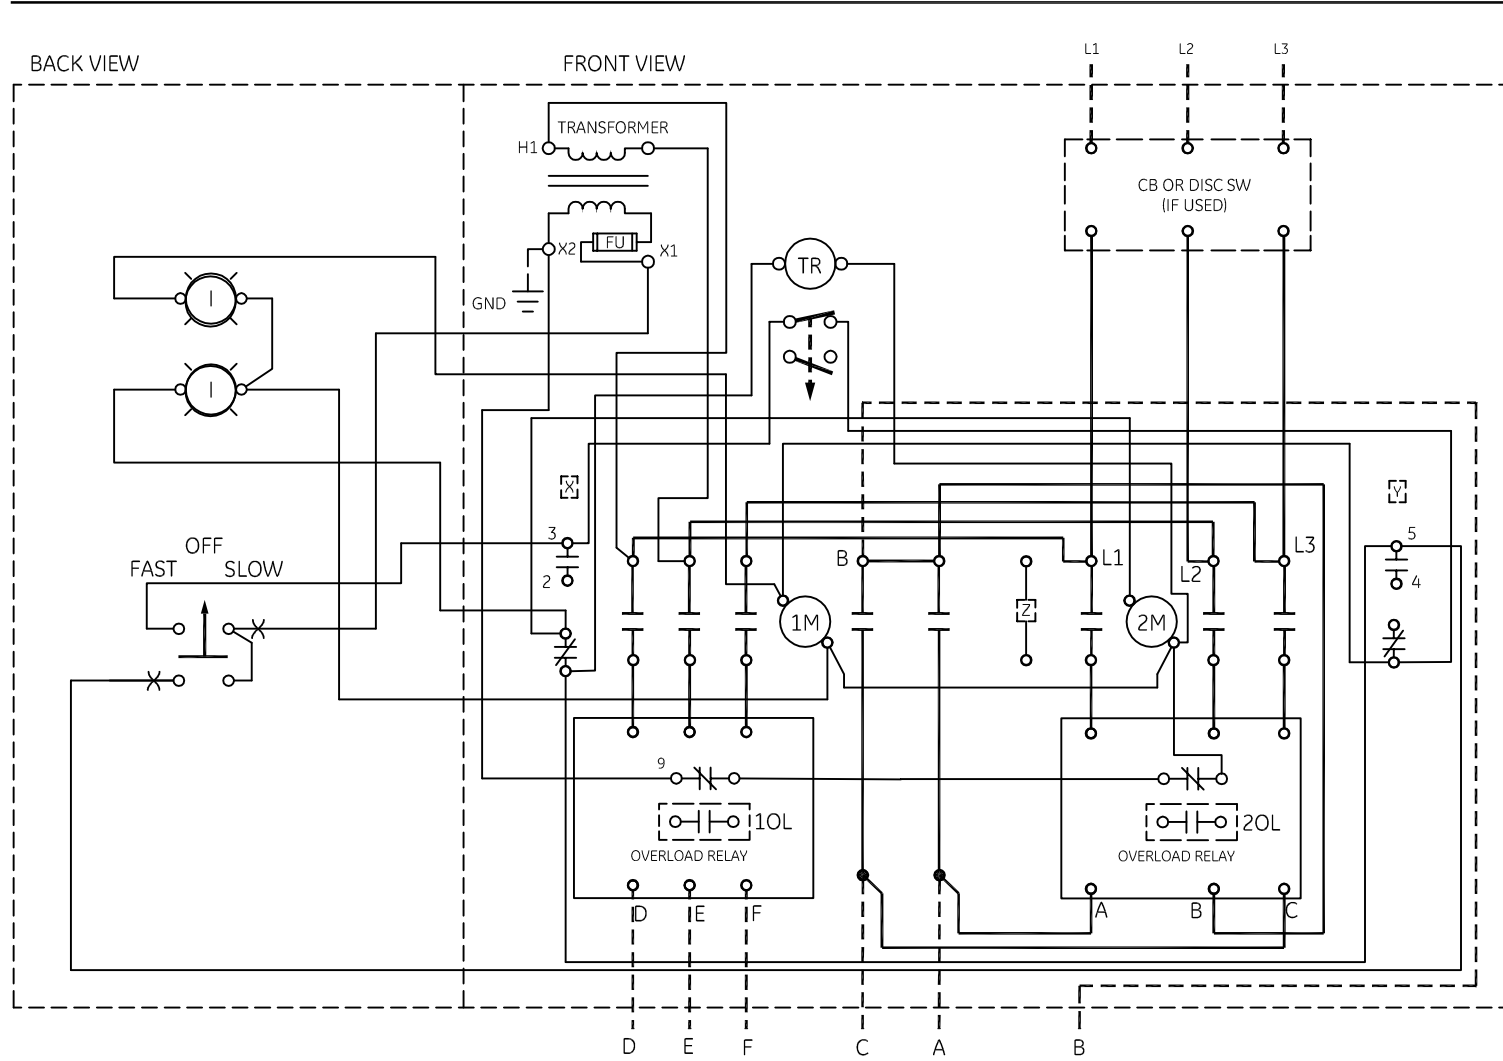

CONNECTION TABLE						
PANEL	A	B	C	D	E	F
MOTOR	T6	T4	T5	T1	T2	T3

INSTALL OVERLOAD HEATERS		
FOR	LOW SPEED	HIGH SPEED
IN	1OL	2OL

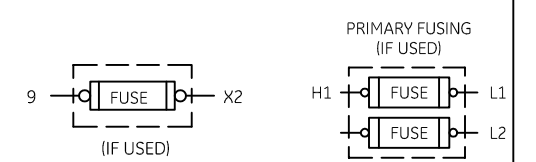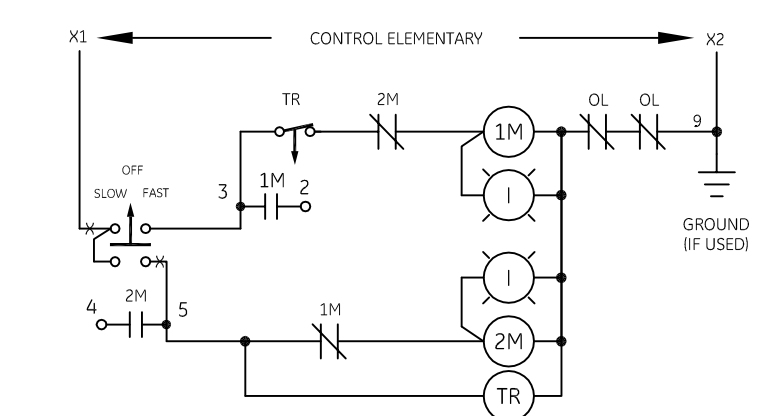

AN #	THIRD ANGLE PROJECTION	SHEET #	WIRING DIAGRAM 2 SPEED - 1 WINDING SIZE 0 & 1		
09-9115		1 OF 1	DWG NO. 55-536574	DATE 09/09/2009	REV 4