



# Transformer



\*1M000000\*

Catalog Number  
**9T11A1006G34**

Type **QL**


**150.0 KVA 60 HZ 3 PH 4 % IMP**

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C


Note: Design is based on 225.0KVA & 150C Rise 5.4% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)  
SECONDARY (X) 208 VOLTS (LINE-LINE)  
120 VOLTS (LINE-NEUTRAL)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

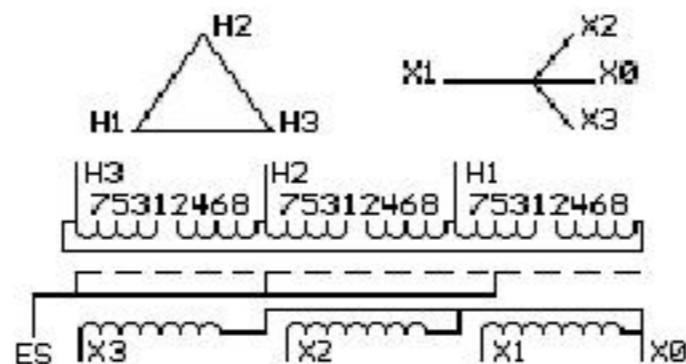

### COIL TAP ARRANGEMENT

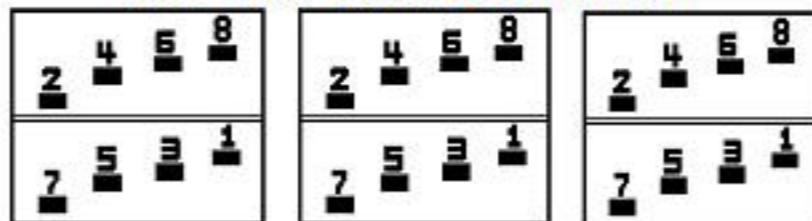

JUMPER CONNECTION	
TAP	VOLTS
1-2	506
2-3	493
3-4	480
4-5	468
5-6	455
6-7	442
7-8	430

NET WGT  
1450 LB  
657.7 Kg

60599  
DY77A

NOG  
031816

INSPECTION  
&  
FINAL TEST  
N612!



LISTED 769G

Assembled in Mexico

ENCLOSURE TYPE 2 (IP20). OR RAINPROOF TYPE 3R (IP22) WHEN PROVIDED SHIELD 9T18Y1077G06

SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 13

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001

ALUMINUM CONDUCTOR


PRIMARY: 10 KV BIL

SECONDARY: 10 KV BIL


Outline:

303B112GEDYP77A

**IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES  
CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE**

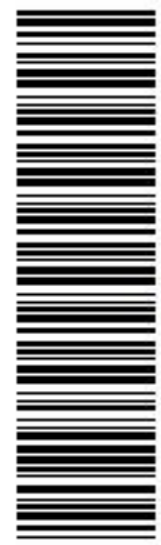

\*2M000000\*

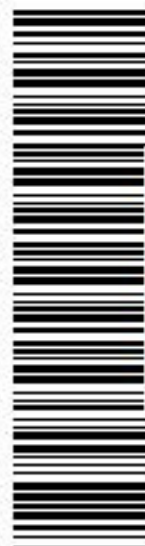

\*3M000000\*