



# Servicenter



\*1M000000\*

Catalog Number

Type QL-WP


9T17S0001

15.0 KVA 60 HZ 3 PH 3.5 % IMP


40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 15.00KVA & 150C Rise 3.5% Imp.

PRIMARY (H) 240 VOLTS (LINE-LINE)  
 SECONDARY (X) 208 VOLTS (LINE-LINE)  
 120 VOLTS (LINE-NEUTRAL)

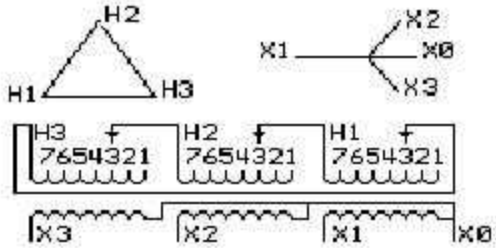

### COIL TAP ARRANGEMENT

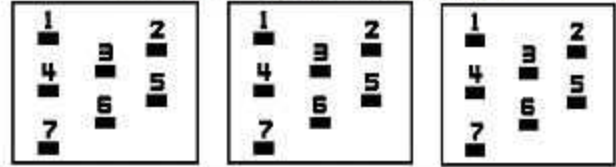

JUMPER CONNECTION	
TAP	VOLTS
1	253
2	246
3	240
4	234
5	228
6	221
7	217

NET WGT  
 231 LB  
 104.8 Kg  
 60417  
 UX71A  
 NOG  
 063016

INSPECTION &  
 FINAL TEST  
 N627!



LISTED 769G

Assembled in Mexico

ENCLOSURE TYPE 2 (IP20). OR RAINPRO-OF TYPE 3R (IP22) WHEN PROVIDED SHIELD

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP008  
 ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL


Outline: 303B-424SSP015

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES  
 CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODE

X3 H3 X2 H2 X1 H1 X0

Note: standard

X0  
 X1 H1  
 X2 H2  
 X3 H3  
 X1 H1  
 X2 H2  
 X3 H3  
 X0

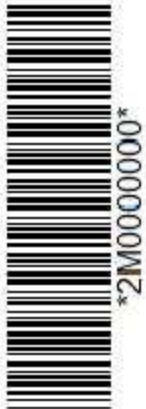

\*2M000000\*



\*3M000000\*