



# Transformer



\*1M000000\*


**Catalog Number**      **Type QL**  
**9Q3A037AFAB13A2T00**  
**9T61B3013G54**

**37.5 KVA    60 HZ    3 PH 3.7 % IMP**


40 C AMB.    150 C RISE    220 C SYSTEM    IS-19C  
*Note: Design is based on 75.00KVA & 115C Rise 7.3% Imp.*

PRIMARY (X)    208 VOLTS (LINE-LINE)  
 SECONDARY (H)    240 VOLTS (LINE-LINE)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

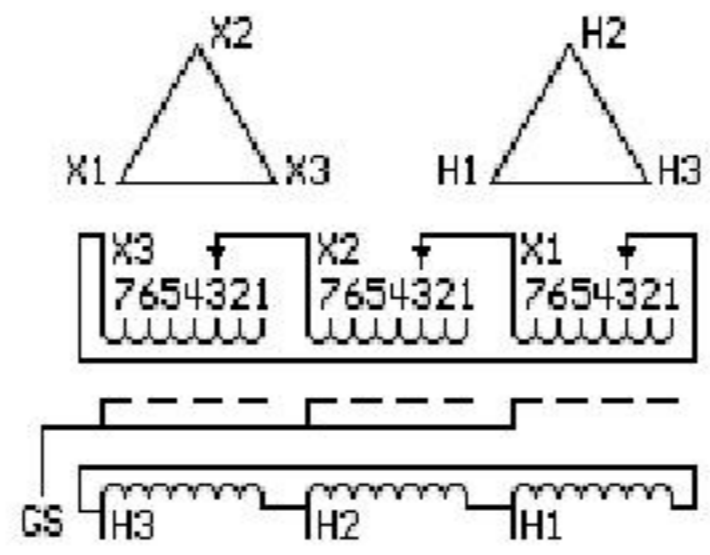

### COIL TAP ARRANGEMENT

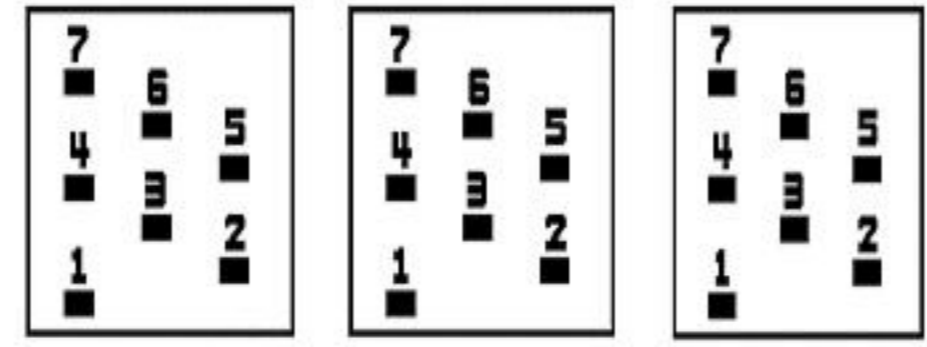

JUMPER CONNECTION	
TAP	VOLTS
1	219
2	212
3	208
4	204
5	197
6	193
7	186

**NET WGT**  
 620 LB  
 281.2 Kg

55555  
 XU374  
 NOG  
 092415

**INSPECTION & FINAL TEST**  
 N539!



Assembled in Mexico

**ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06**  
 SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 13  
 BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001      Outline: 303B401AAP074  
 ALUMINUM CONDUCTOR      PRIMARY: 10 KV BIL      SECONDARY: 10 KV BIL

**IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.**

H3 - H2 - H1 - -  
 - X3 - X2 - X1

Note: Standard

H3 - H2 - H1 - -  
 - X3 - X2 - X1

