



Transformer

Catalog Number

9T61B3876G93

150.0 KVA 60 HZ 3 PH 1.7 % IMP

40 C AMB. 80 C RISE 220 C SYSTEM IS-19C Type: QL

Note: Design is based on 150.0KVA & 80C Rise 1.9% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
 120 VOLTS (LINE-NEUTRAL)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G 88


SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 13
BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

**IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES
CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.**


GE Energy Industrial Solutions

NEMA CLASS AA DRY TYPE TRANSFORMER

Meets TP-1 2002 efficiency

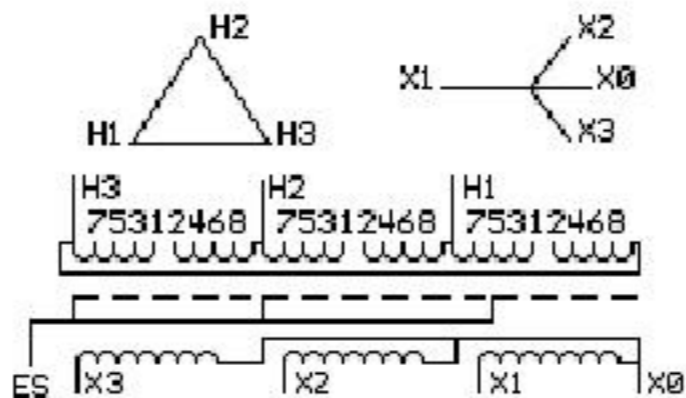

COIL TAP ARRANGEMENT

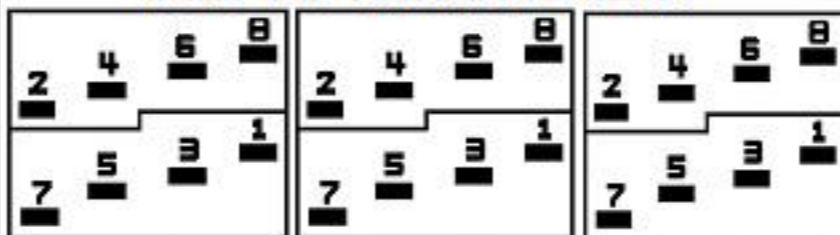

JUMPER CONNECTION

TAP	VOLTS
1-2	505
2-3	493
3-4	480
4-5	467
5-6	455
6-7	442
7-8	429

NET WGT 1590 LB 721.2 Kg

082515 N535! XV377
56718 NOG



LISTED 769G

Outline: 3038919AAP077
Assembled in Mexico

INSPECTION & FINAL TEST
N535!

