



Transformer



1M000000

Catalog Number **Type** QL
9Q3C045AABU13B2T00
9T61C9363G13

45.0 KVA **60 HZ** **3 PH** **3.5 % IMP**

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C


Note: Design is based on 75.00KVA & 150C Rise 5.9% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
 SECONDARY (X) 208 VOLTS (LINE-LINE)


ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06
 SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 13
 BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP074
 COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

**IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES
 CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.**

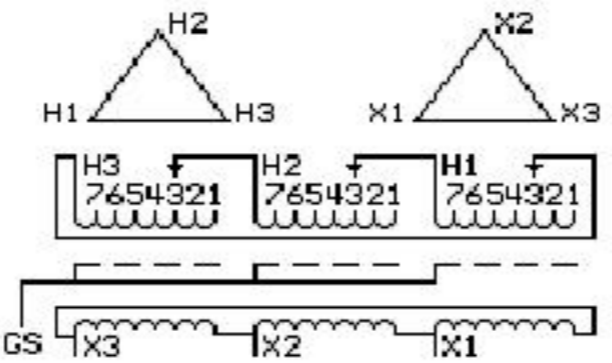

COIL TAP ARRANGEMENT

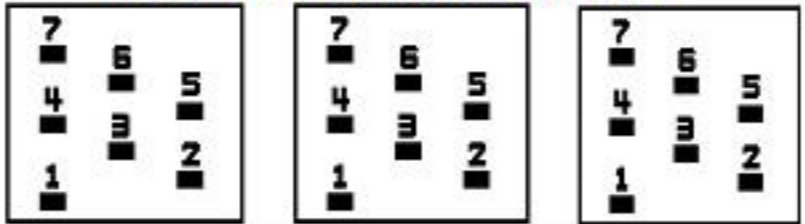

JUMPER CONNECTION	
TAP	VOLTS
1	505
2	490
3	480
4	468
5	457
6	446
7	431

NET WGT
 710 LB
 322.1 Kg

55311
 XV374
 NOG
 081115

INSPECTION
 &
 FINAL TEST
 N533!

Assembled in Mexico


X3 - X2 - X1 - -
 - H3 - H2 - H1

Note: Standard

X1 - - H1
 X2 - - H2
 X3 - - H3



2M000000

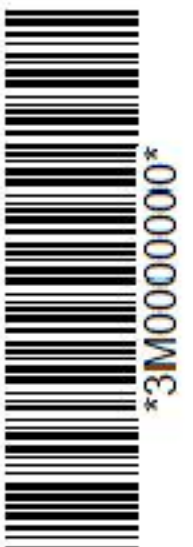

3M000000