




Transformer

Catalog Number 9T61C9548G13

9Q3C300AABL13B2T00

300.0 KVA 60 HZ 3 PH 2.4 % IMP

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C Type: QL

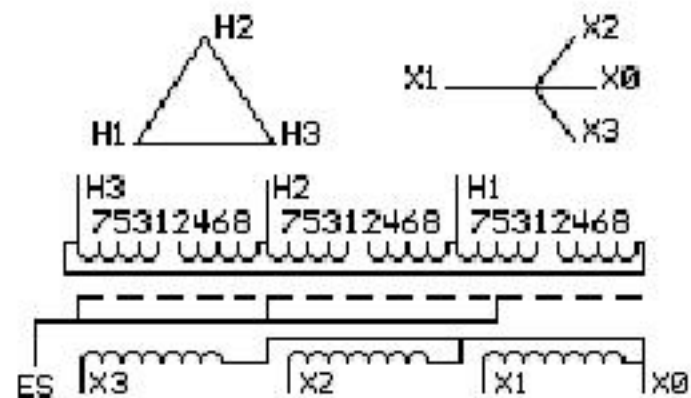


JUMPER CONNECTION

TAP	VOLTS
1-2	502
2-3	492
3-4	480
4-5	472
5-6	462
6-7	442
7-8	432

PRIMARY (H) 480 VOLTS (LINE-LINE)
 SECONDARY (X) 400 VOLTS (LINE-LINE)
 231 VOLTS (LINE-NEUTRAL)

COIL TAP ARRANGEMENT

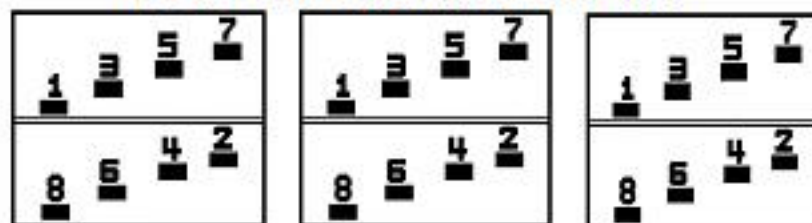

NET WGT 2900 LB 1315.4 Kg

090115 N536! L39AA
55775 NOG

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G68

SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 13
 BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
 COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES
 CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.



LISTED 769G

Outline: 303B912AAP179
Assembled in Mexico

INSPECTION & FINAL TEST
N536!

