



Transformer



1M000000

Catalog Number **9Q3A045AAAC04B2T00** Type QL
9T64B3843G13


45.0 KVA 60 HZ 3 PH 4% IMP

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C


Note: Design is based on 75.00KVA & 150C Rise 6.9% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 240 VOLTS (LINE-LINE)
120 VOLTS (1 PH MIDTHAP)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

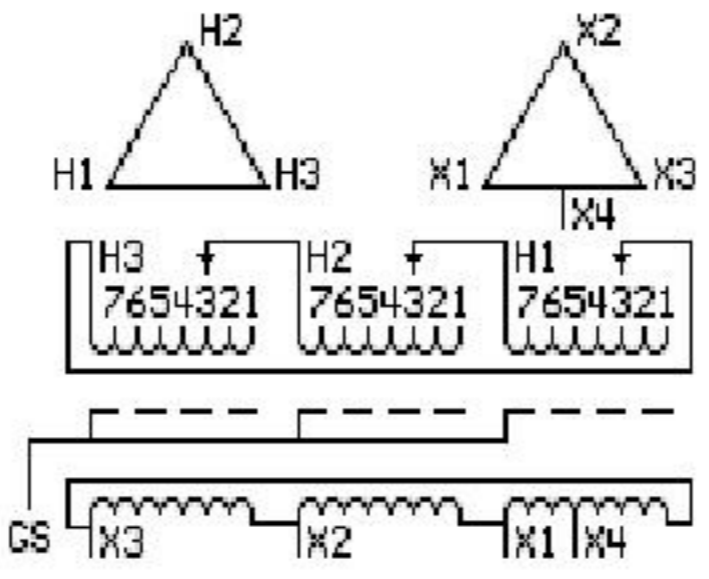

COIL TAP ARRANGEMENT

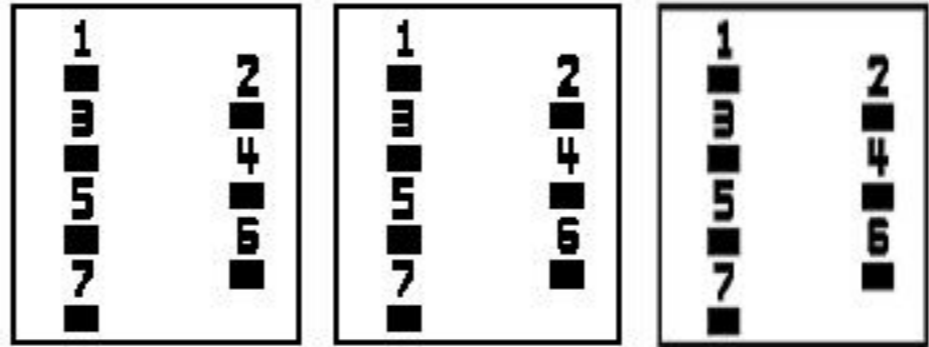

JUMPER CONNECTION	
TAP	VOLTS
1	505
2	491
3	480
4	469
5	455
6	445
7	433

NET WGT
620 LB
281.2 Kg

55655
XU374
NOG
092415

INSPECTION
&
FINAL TEST
N539!



LISTED 769G

Assembled in Mexico

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06
SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 4
BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP074
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

X3 - X2 - X1 - X4
- H3 - H2 - H1

Note: Mid-Top

X4

X1 -

X2 -

X3 -

H1 -

H2 -

H3 -

X4

X1 -

X2 -

X3 -

H1 -

H2 -

H3 -

