



# Transformer

Catalog Number

**9T64B3878G23**

**300.0 KVA    60 HZ    3 PH    2.5 % IMP**

40 C AMB.    115 C RISE    220 C SYSTEM    IS-19C    Type: QL

Note: Design is based on 500.0KVA & 150C Rise 5% Imp.

PRIMARY (H)    480 VOLTS (LINE-LINE)  
SECONDARY (X)    208 VOLTS (LINE-LINE)  
                          120 VOLTS (LINE-NEUTRAL)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G68


SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED 4  
BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
ALUMINUM CONDUCTOR    PRIMARY: 10 KV BIL    SECONDARY: 10 KV BIL

**IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES  
CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.**

GE Energy Industrial Solutions

**NEMA CLASS AA DRY TYPE TRANSFORMER**


Meets TP-1 2002 efficiency

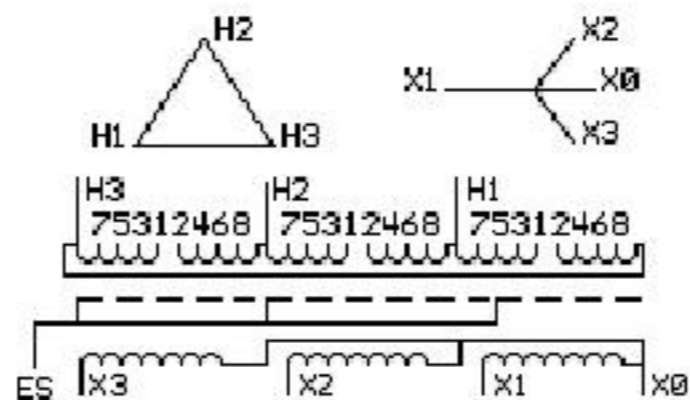

**JUMPER CONNECTION**

TAP	VOLTS
1-2	502
2-3	449
3-4	480
4-5	469
5-6	459
6-7	448
7-8	437

### COIL TAP ARRANGEMENT

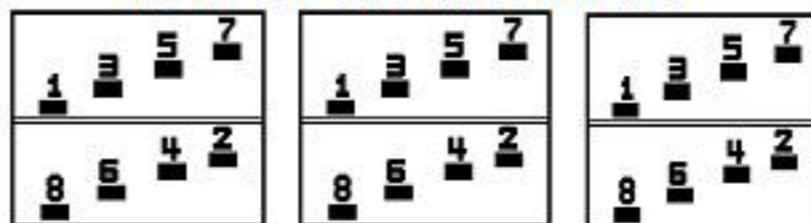

NET WGT 3400 LB 1542.2 Kg

090815    N537!    YF379  
33309    NOG



LISTED 769G

Outline: 3038919AAP179  
Assembled in Mexico

INSPECTION & FINAL TEST  
N537!

