



Transformer



1M000000



Catalog Number TYPE QL

9T83B2633

50.0 KVA 50/60 HZ 1 PH 3.7 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

NOG

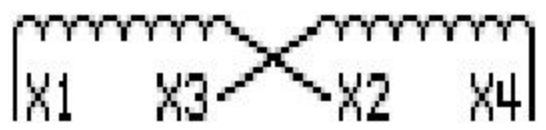
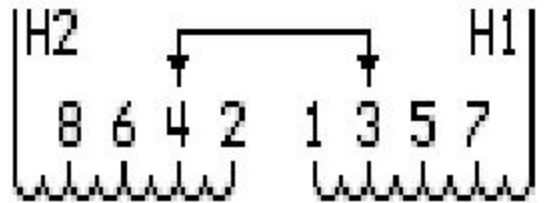


PRIMARY LINES ON H1-H2				SECONDARY LINES ON X1-X4			
VOLTS	CONNECT	VOLTS	CONNECT	VOLTS	CONNECT	VOLTS	CONNECT
215	8-H1, 7-H2	430	8-7	208	X1-X3, X2-X4		
229	6-H1, 5-H2	444	7-6	416	X2-X3		
240	4-H1, 3-H2	458	6-5				
253	2-H1, 1-H2	468	5-4				
		480	4-3				
		494	3-2				

NET WGT
340 LB
154.2 Kg
9T83B2
19529
111411

INSPECTION
&
FINAL TEST
N1471

COIL TAP ARRANGEMENT



LISTED 769G

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06

Outline: 303B406AAP073 Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

H3 H1 - H2 H4 - -
- - X2 - - X1

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

Note: Standard

H3 H1 - H2 H4 - X1
- - X2 - - X1
H3 H1 - H2 H4 - X1
- - X2 - - X1

