



Transformer

NEMA CLASS AA DRY TYPE TRANSFORMER

S/N:



Catalog Number


Type QL

9T83B2670

15.0 KVA 60HZ 1PH 4.6 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

NOG

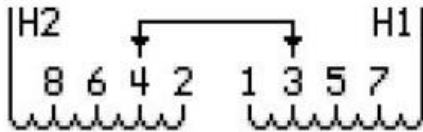

**PRIMARY
LINES ON H1-H2**

VOLTS	CONNECT	VOLTS	CONNECT
216	8-H1,7-H2	432	8-7
228	6-H1,5-H2	444	7-6
240	4-H1,3-H2	456	6-5
252	2-H1,1-H2	468	5-4
		480	4-3
		492	3-2
		504	2-1

**SECONDARY
LINES ON X1-X4**

VOLTS	CONNECT
120	X1-X3, X2-X4
240	X2-X3

**SECONDARY
LINES ON X1-X2-X4**

VOLTS	CONNECT
240/120	X2-X3

NET WGT

320 LB

145.2 Kg

YX171

74061



032018

INSPECTION

FINAL TEST

N812!

COIL TAP ARRANGEMENT



ENCLOSURE TYPE 2 (IP20). RAINPROOF TYPE 3R ENCLOSURE (IP22) WHEN PROVIDED SHIELD 9T18Y4317G05

Outline: 303B406AAP071 Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

X3 - X1 - X2 X4

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES
CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

H2 - H1 - -

Note:

GE Energy Industrial Solutions

Meets DOE 2016 efficiency