



Transformer

NEMA CLASS AA DRY TYPE TRANSFORMER

S/N:



Catalog Number


Type QL

9T83B2671

25.0 KVA 60HZ 1PH 5.3 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

NOG

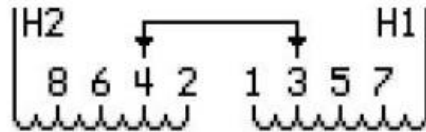

PRIMARY LINES ON H1-H2			
VOLTS	CONNECT	VOLTS	CONNECT
217	8-H1,7-H2	434	8-7
229	6-H1,5-H2	446	7-6
240	4-H1,3-H2	457	6-5
251	2-H1,1-H2	469	5-4
		480	4-3
		491	3-2
		502	2-1



SECONDARY LINES ON X1-X4	
VOLTS	CONNECT
120	X1-X3, X2-X4
240	X2-X3

SECONDARY LINES ON X1-X2-X4	
VOLTS	CONNECT
240/120	X2-X3

NET WGT
320 LB
145.2 Kg
YX171
74061
032018

INSPECTION
FINAL TEST
N812!

COIL TAP ARRANGEMENT



LISTED 769G

ENCLOSURE TYPE 2 (IP20). RAINPROOF TYPE 3R ENCLOSURE (IP22) WHEN PROVIDED SHIELD 9T18Y4317G-05

Outline: 303B406AAP071 Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES
CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

X3 - X1 - X2 X4
H2 - H1 - -

Note: