



Transformer



M0000000

Catalog Number
9T83B3092G13

Type QL


30.0 KVA 60 HZ 3 PH 6.3 % IMP

40 C AMB. 115 C RISE 220 C SYSTEM IS-19C


Note: Design is based on 30.00KVA & 150C Rise 5.7% Imp.

PRIMARY (H) 208 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

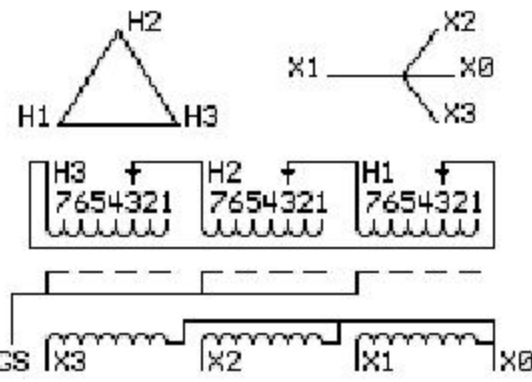

COIL TAP ARRANGEMENT

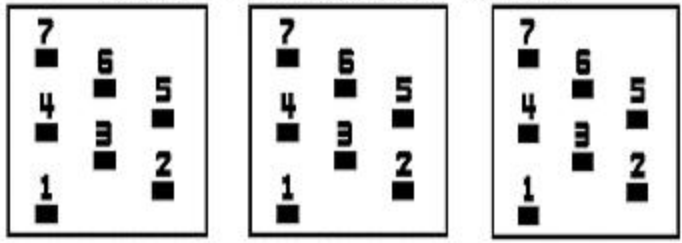

JUMPER CONNECTION	
TAP	VOLTS
1	218
2	214
3	208
4	203
5	197
6	192
7	188

NET WGT
334 LB
151.5 Kg
9T83B3092G03
26344
W372
NOG
013013

INSPECTION & FINAL TEST N305!



LISTED 769G

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G05

Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP072
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

X3 - X2 - X1 - -

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

- H3 - H2 - H1

Note: X0 Terminal at the bottom

X3 - X2 - X1 - -

- H3 - H2 - H1


X3 - X2 - X1 - -

- H3 - H2 - H1

X0



M0000000

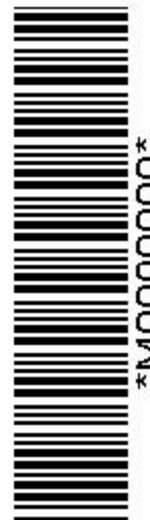

M0000000