




# Transformer

Catalog Number 9T83B3097G03

225.0 KVA 60 HZ 3 PH 6.2 % IMP


40 C AMB. 150 C RISE 220 C SYSTEM IS-19C Type: Q1

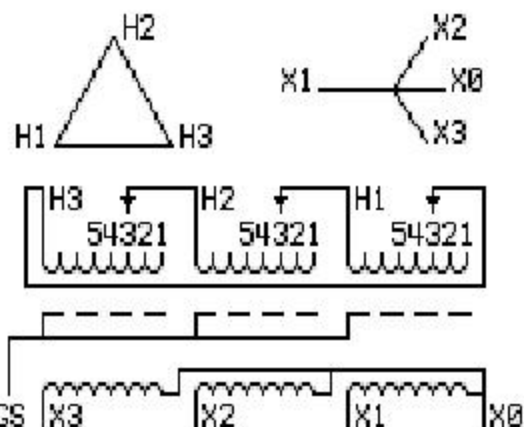

JUMPER CONNECTION	
TAP	VOLTS
1	221
2	215
3	208
4	202
5	196

PRIMARY (H) 208 VOLTS (LINE-LINE)  
 SECONDARY (X) 208 VOLTS (LINE-LINE)  
 120 VOLTS (LINE-NEUTRAL)

### COIL TAP ARRANGEMENT

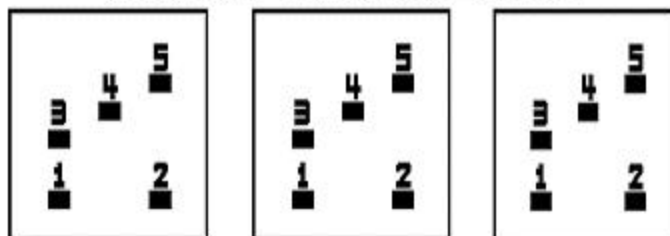

NET WGT 1590 LB 721.2 Kg  
 062612 N226! X/377  
 9T83B3097G 24789 NOG

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G79

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
 ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES  
 CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.



LISTED 769G

Outline: 303B919AAP077  
 Assembled in Mexico

INSPECTION & FINAL TEST  
 N226!



\*M000000\*



\*M000000\*