Transformer

M0000000

Catalog Number Type QL

9T83B3962

30.0 KVA 50/60 HZ 3 PH 5 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 380 VOLTS (LINE-LINE)
219 VOLTS (LINE-NEUTRAL)

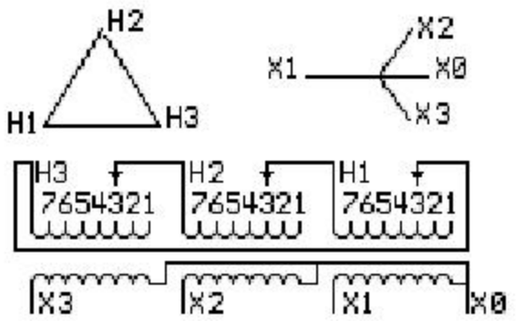

COIL TAP ARRANGEMENT

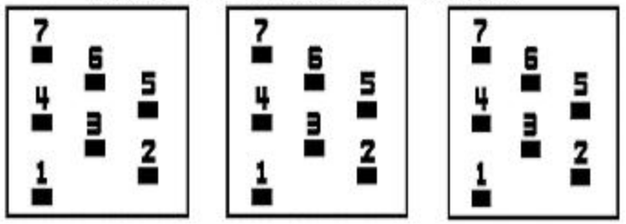

JUMPER CONNECTION TAP	VOLTS
1	505
2	493
3	480
4	467
5	455
6	444
7	432

NET WGT
415 LB
188.2 Kg
9T83B3962
15905
XU373
NOG
020413

INSPECTION & FINAL TEST
N306!

LISTED 769G

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G05

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP073
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

Assembled in Mexico

X3 - X2 - X1 - -
- H3 - H2 - H1

Note: X0 Terminal at the bottom

- X0
X3 - X2 - X1 - -
- H3 - H2 - H1

M0000000

M0000000

GE Energy Industrial Solutions NEMA CLASS AA DRY TYPE TRANSFORMER Meets TP-1 2002 efficiency