



Drive Isolation Transformer


Catalog Number **9T83B4039G79**

118.0 KVA 50/60 3 PH 2.8 % IMP

40 C AMB. 140 C RISE ^{1/2} 220 C SYSTEM IS-19C Type: Q1

Note: Design is based on 145.0KVA & 140C Rise 3.5% Imp.


PRIMARY (H)	415 VOLTS (LINE-LINE)
SECONDARY (X)	460 VOLTS (LINE-LINE)
	266 VOLTS (LINE-NEUTRAL)

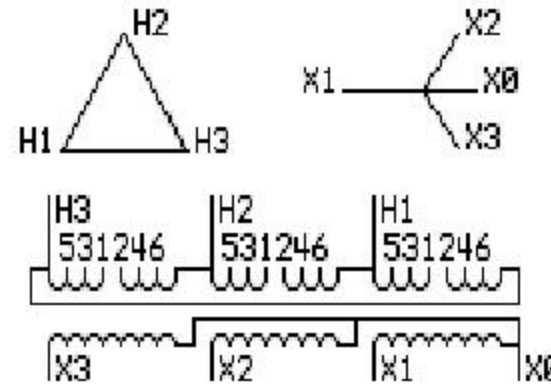

JUMPER CONNECTION

TAP	VOLTS
1-2	436
3-4	415
5-6	396

COIL TAP ARRANGEMENT

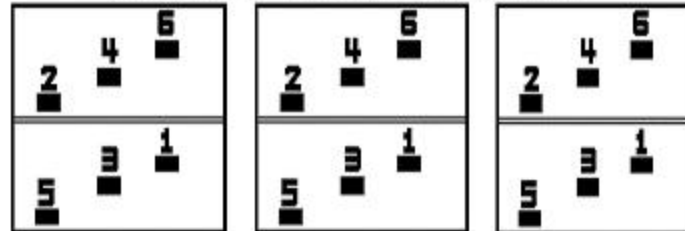

NET WGT 1585 LB 719.0 Kg

111411 N147! FC79

9T83B4040G 17486 NOG

1M000000

2M000000



ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G79

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001

ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.



LISTED 769G

Outline: 303B919AAP077

Assembled in Mexico

INSPECTION & FINAL TEST

N147!