



Transformer



1M000000

Catalog Number
9T83B4082G21


Type **QL**

27.0 KVA 60 HZ 3 PH 3.6 % IMP

40 C AMB. 80 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 40.00KVA & 150C Rise 5.5% Imp.

PRIMARY (X) 208 VOLTS (LINE-LINE)
SECONDARY (H) 230 VOLTS (LINE-LINE)
133 VOLTS (LINE-NEUTRAL)

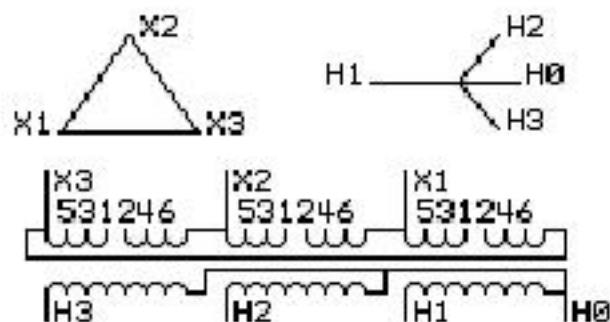

JUMPER CONNECTION TAP VOLTS


1-2	218
3-4	208
5-6	198

NET WGT
415 LB
188.2 Kg

45349
XV373
NOG
071515

INSPECTION & FINAL TEST N529!

COIL TAP ARRANGEMENT

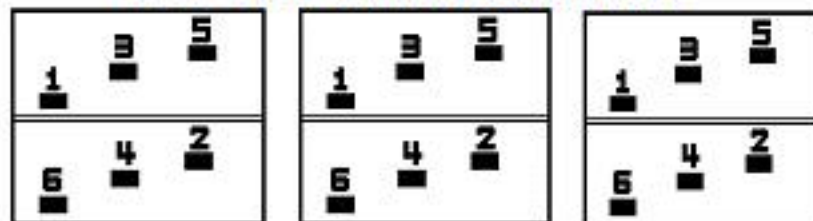

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G05

Assembled in Mexico


BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

Outline: 303B401AAP073

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

H3 - H2 - H1 - -
- X3 - X2 - X1

Note: H0 Terminal at the bottom

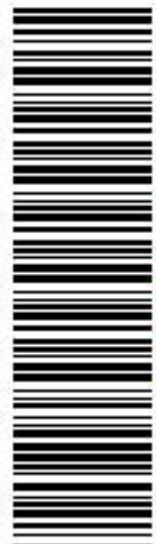

2M000000



3M000000

H3 - H2 - H1 -
- X3 - X2 - X1
H3 - H2 - H1 -
- X3 - X2 - X1
H0