



Core & Coil Transformer



M0000000

Catalog Number
9T84B3871G15


Type QL-C

15.0 KVA 60 HZ 3 PH 5.6 % IMP


40 C AMB. 115 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 11.00KVA & 150C Rise 3.7% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 208 VOLTS (LINE-LINE)
120 VOLTS (LINE-NEUTRAL)

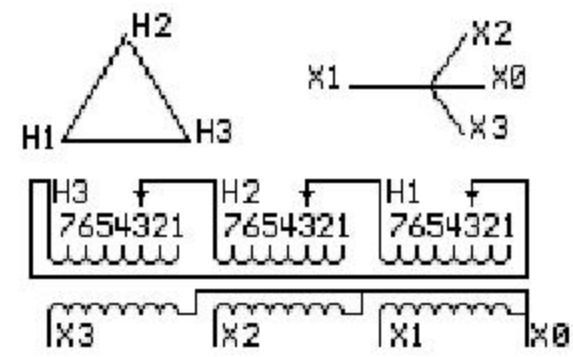

COIL TAP ARRANGEMENT

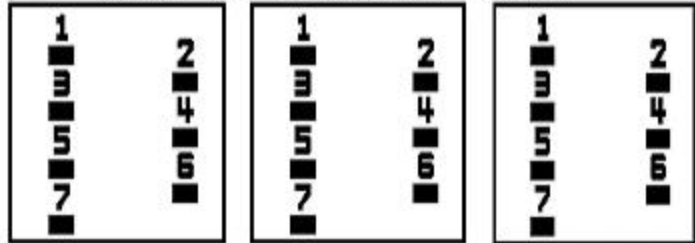

JUMPER CONNECTION TAP	VOLTS
1	504
2	491
3	480
4	468
5	457
6	444
7	431

NET WGT
210 LB
95.3 Kg
9T83B3870
25737
8U371
NOG
011613

INSPECTION & FINAL TEST N303!



Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP071
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL


IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

X3 - X2 - X1 - X0
- H3 - H2 - H1


Note: Standard

X0
-
X1 - H1
-
X2 - H2
-
X3 - H3

X0
-
X1 - H1
-
X2 - H2
-
X3 - H3

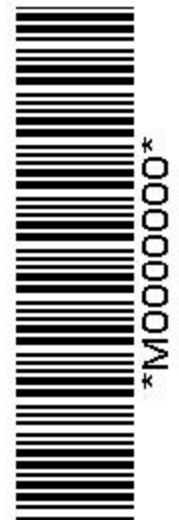

M0000000

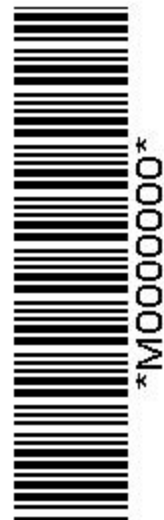

M0000000