



Transformer


Catalog Number

9T96C9872G03

30.0 KVA 60 HZ 3 PH 3.2 % IMP

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C Type: Q1


Note: Design is based on 30.00KVA & 115C Rise 3% Imp.

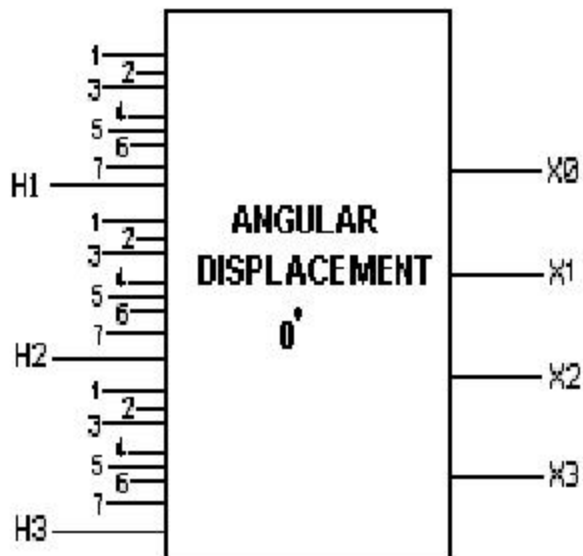

JUMPER CONNECTION	
TAP	VOLTS
1	505
2	492
3	480
4	469
5	456
6	442
7	433

PRIMARY (H) 480 VOLTS (LINE-LINE)
 SECONDARY (X) 208 VOLTS (LINE-LINE)
 120 VOLTS (LINE-NEUTRAL)

COIL TAP ARRANGEMENT

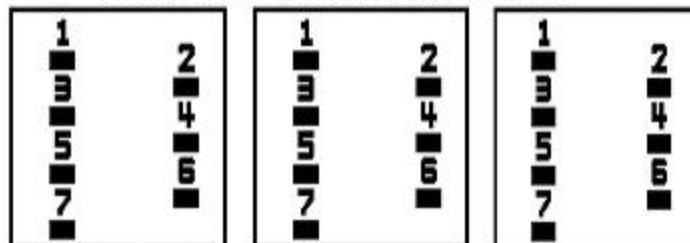

NET WGT 495 LB 224.5 Kg

122012 N251! H372C

9T96C9872G 25583 NOG

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G05

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
 COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

13



Outline: 303B431AAP072
Assembled in Mexico

INSPECTION & FINAL TEST
N251!

