




Transformer

Catalog Number

9T96C9872G13

30.0 KVA 60 HZ 3 PH 3 % IMP


40 C AMB. 115 C RISE 220 C SYSTEM IS-19C Type: QL

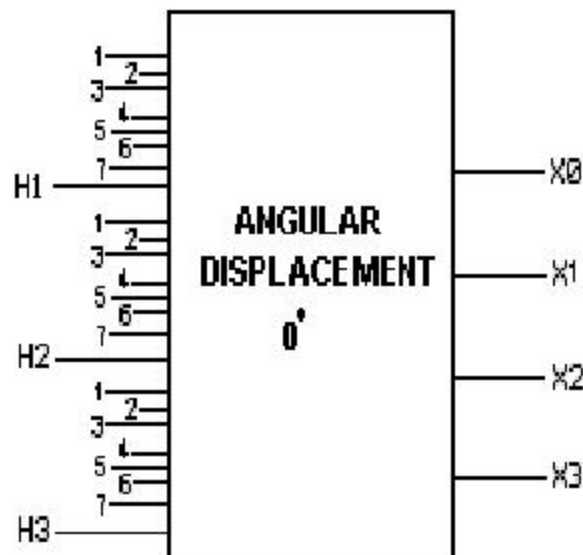

JUMPER CONNECTION	
TAP	VOLTS
1	505
2	492
3	480
4	469
5	456
6	442
7	433

PRIMARY (H) 480 VOLTS (LINE-LINE)
 SECONDARY (X) 208 VOLTS (LINE-LINE)
 120 VOLTS (LINE-NEUTRAL)

COIL TAP ARRANGEMENT

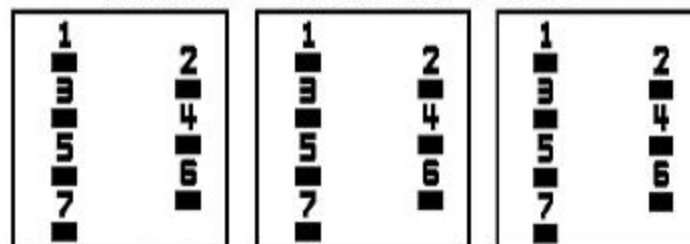

NET WGT 495 LB 224.5 Kg

030613 N310! H372C

9T96C9872G 27591 NOG

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001

COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

13



LISTED 769G

Outline: 303B431AAP072

Assembled in Mexico

INSPECTION & FINAL TEST

N310!

