




# Transformer

Catalog Number

**9T96C9873G13**

**45.0 KVA    60 HZ    3 PH    4.5 % IMP**


40 C AMB.    115 C RISE    220 C SYSTEM    IS-19C    Type: QL

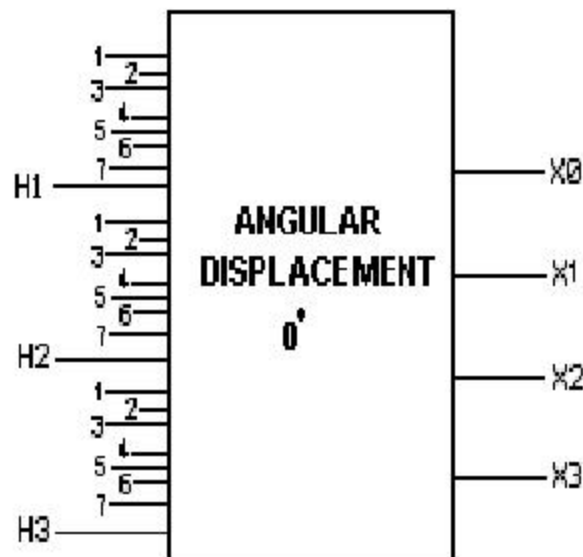

JUMPER CONNECTION	
TAP	VOLTS
1	505
2	493
3	480
4	470
5	455
6	443
7	431

PRIMARY (H)    480 VOLTS (LINE-LINE)  
 SECONDARY (X)    208 VOLTS (LINE-LINE)  
                           120 VOLTS (LINE-NEUTRAL)

### COIL TAP ARRANGEMENT

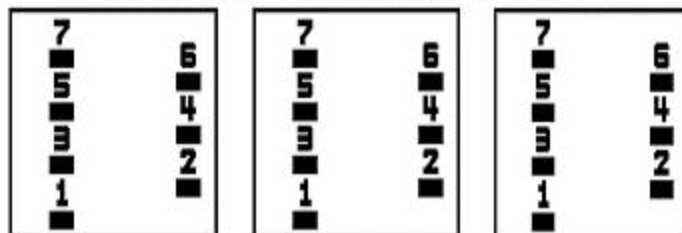

NET WGT 640 LB    290.3 Kg  
 030613    N310!    H373C  
 9T96C9873G    27593    NOG

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G05

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
 COPPER CONDUCTOR    PRIMARY: 10 KV BIL    SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES  
 CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

13



LISTED 769G

Outline: 303B431AAP073  
 Assembled in Mexico

INSPECTION & FINAL TEST  
 N310!

