




Transformer

Catalog Number 9T96C9876G13

150.0 KVA 60 HZ 3 PH 3.5 % IMP


40 C AMB. 115 C RISE 220 C SYSTEM IS-19C Type: Q1

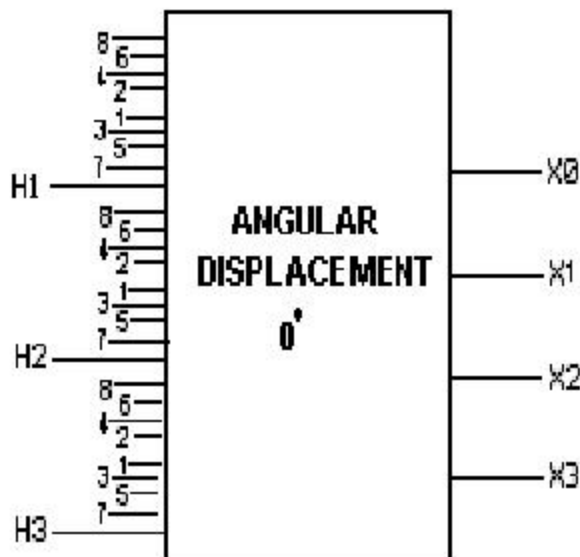

JUMPER CONNECTION	
TAP	VOLTS
1-2	505
2-3	494
3-4	480
4-5	466
5-6	455
6-7	444
7-8	433

PRIMARY (H) 480 VOLTS (LINE-LINE)
 SECONDARY (X) 208 VOLTS (LINE-LINE)
 120 VOLTS (LINE-NEUTRAL)

COIL TAP ARRANGEMENT

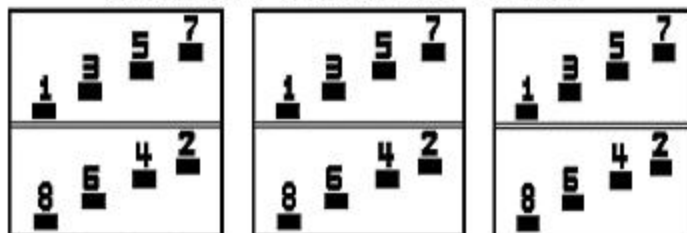

NET WGT 2000 LB 907.2 Kg

112212 N247! H376C

9T96C9876G 25305 NOG

ELECTROSTATIC GROUND SHIELD IN EACH PHASE

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G79

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
COPPER CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

13



LISTED 769G

Outline: 303B931AAP076
Assembled in Mexico

INSPECTION & FINAL TEST
N247!

