

New



Series NMV

Electronic timers suitable for use in industrial automation, commercial and residential applications

The new electronic timers series NMV, are particularly suitable to be employed in all industrial fields, as well as residential and commercial applications.

- Standard 22.5 mm width modules cover the complete range.
- Mounting: DIN-rail or base mounting (with screws).
Cost saving ease of installation.
- Improved timing accuracy.
Time bands up to 100 hours duration.
Selectable for star-delta commutation times of 50 ms or 100 ms.
- Time delay adjustment by means of a potentiometer enabling quick and accurate adjustment.
- LED status indication.
Confirms supply availability and contact operational condition.
- All devices have 1 or 2 changeover contacts and a thermal current of 6A (Ith).




Series NMV

Time setting

The DIP switches on the front of the device are to select the appropriate time range for the application.
The function of the DIP switch is indicated in the product instruction sheet supplied with the device.

Example

Adjust the time setting dial on the front of the timer to the required time.
In this example, 0 to 6 seconds and 10 to 60 seconds.



Range: 6 - 60 seconds



0 to 6 seconds
10 to 60 seconds

Identification



Indication and diagnostic LED. Status indication of the contact and of the power supply.

Timing range up to 100 hours.
For start-delta timer selectable changeover time at 50 ms or 100 ms.

Setting of the time delay is by a setting dial allowing quick and accurate adjustment.

Mounting: DIN rail or base mounting (with screws).

Order codes


| Description | Supply voltage | Time range | Contacts | Art. No. | Ref. No. | |
|--|---------------------------|---------------------|-------------------------------------|---------------------------|----------|--------|
| Delayed ON relay | direct 24-240V AC/DC | 0.06 sec.-6000 min. | 1 changeover | NMTCV | 124900 | |
| | with transformer 110/125V | 0.06 sec.-6000 min. | 2 changeover | NMTCV2 | 124901 | |
| | with transformer 200/240V | | 1 changeover | NMTCVTAJ | 124902 | |
| Delayed ON relay with instantaneous contact | with transformer 380/440V | 0.06 sec.-6000 min. | 1 contact timed+ 1 contact inst. | NMTCVTAM | 124903 | |
| | direct 24-240V AC/DC | | | NMTCVTAU | 124904 | |
| | | | | NMTCIV | 124905 | |
| Delayed ON relay with thyristor output timer | direct 24-240V AC/DC | 0.2-500 sec. | thyristor output | NMTCSV | 124906 | |
| Impulse ON timer | direct 24-240V AC/DC | 0.06 sec.-6000 min. | 1 changeover | NMICV | 124907 | |
| Star-delta starter relay | direct 24-240V AC/DC | 1-60 sec. | 2 timed | NMETV | 124908 | |
| | | | | with transformer 110/125V | NMETVTAJ | 124909 |
| | | | | with transformer 200/240V | NMETVTAM | 124910 |
| | with transformer 380/440V | 0.5-6 sec. | 1 changeover | NMETVTAU | 124911 | |
| | | | | with transformer 110/125V | NMRDV-6 | 124912 |
| | | | | with transformer 200/240V | NMRDV-60 | 124913 |
| | with transformer 380/440V | 50-600 sec. | 2 changeover | NMRDV-600 | 124914 | |
| | | 0.5-6 sec. | | NMRDV2-6 | 124915 | |
| | | 5-60 sec. | NMRDV2-60 | 124916 | | |
| | | 50-600 sec. | NMRDV2-600 | 124917 | | |
| | | 0.5-6 sec. | 1 changeover | NMRDV2-6AJ | 124918 | |
| | | 5-60 sec. | | NMRDVT-60AJ | 124921 | |
| with transformer 200/240V | 50-600 sec. | 1 changeover | NMRDVT-600AJ | 124924 | | |
| | 0.5-6 sec. | | NMRDVT-6AM | 124919 | | |
| | 5-60 sec. | | NMRDVT-60AM | 124922 | | |
| with transformer 380/440V | 50-600 sec. | 1 changeover | NMRDVT-600AM | 124925 | | |
| | 0.5-6 sec. | | NMRDVT-6AU | 124920 | | |
| | 5-60 sec. | | NMRDVT-60AU | 124923 | | |
| | 50-600 sec. | | NMRDVT-600AU | 124926 | | |
| Delayed OFF timer through contact timer | direct 24-240V AC/DC | 0.06 sec.-6000 min. | 1 changeover | NMTDV | 124927 | |
| Symmetric intermittance | direct 24-240V AC/DC | 0.6 sec.-6000 min. | 1 changeover | NMIFV | 124928 | |
| Asymmetric intermittance started by connection | direct 24-240V AC/DC | 0.6 sec.-6000 min. | 1 changeover | NMIVV | 124929 | |
| Multifunction or pause (selectable) | direct 24-240V AC/DC | 0.06 sec.-6000 min. | 1 changeover | NMMFV | 124930 | |
| | with transformer 110/125V | | | NMMFVT2AJ* | 124931 | |
| | with transformer 200/240V | | | NMMFVT3AM* | 124932 | |
| | with transformer 380/440V | | | NMMFVT4AU* | 124933 | |

* Module 45 mm

GE Industrial Solutions
International Sales
Nieuwevaart 51
B-9000 Gent - Belgium
Tel. +32/9 265 21 11
Fax +32/9 265 28 90
E-mail: gepcbel@gepc.ge.com
www.ge.com/ex/industrialsolutions

GE Power Controls
Hornhouse Lane
Knowsley Industrial Park
Liverpool L33 7YQ
Tel. 0870 600 4372
Fax 0151 549 4545
E-mail: gepcuk@gepc.ge.com
www.ge.com/ex/industrialsolutions

Dimensions

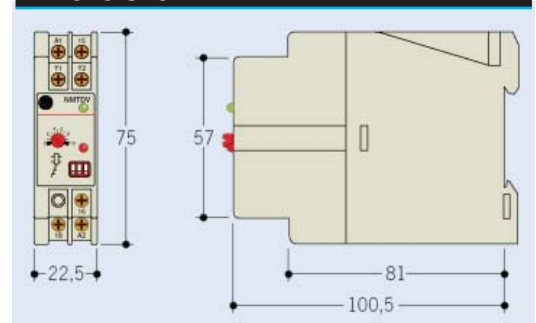

GE imagination at work