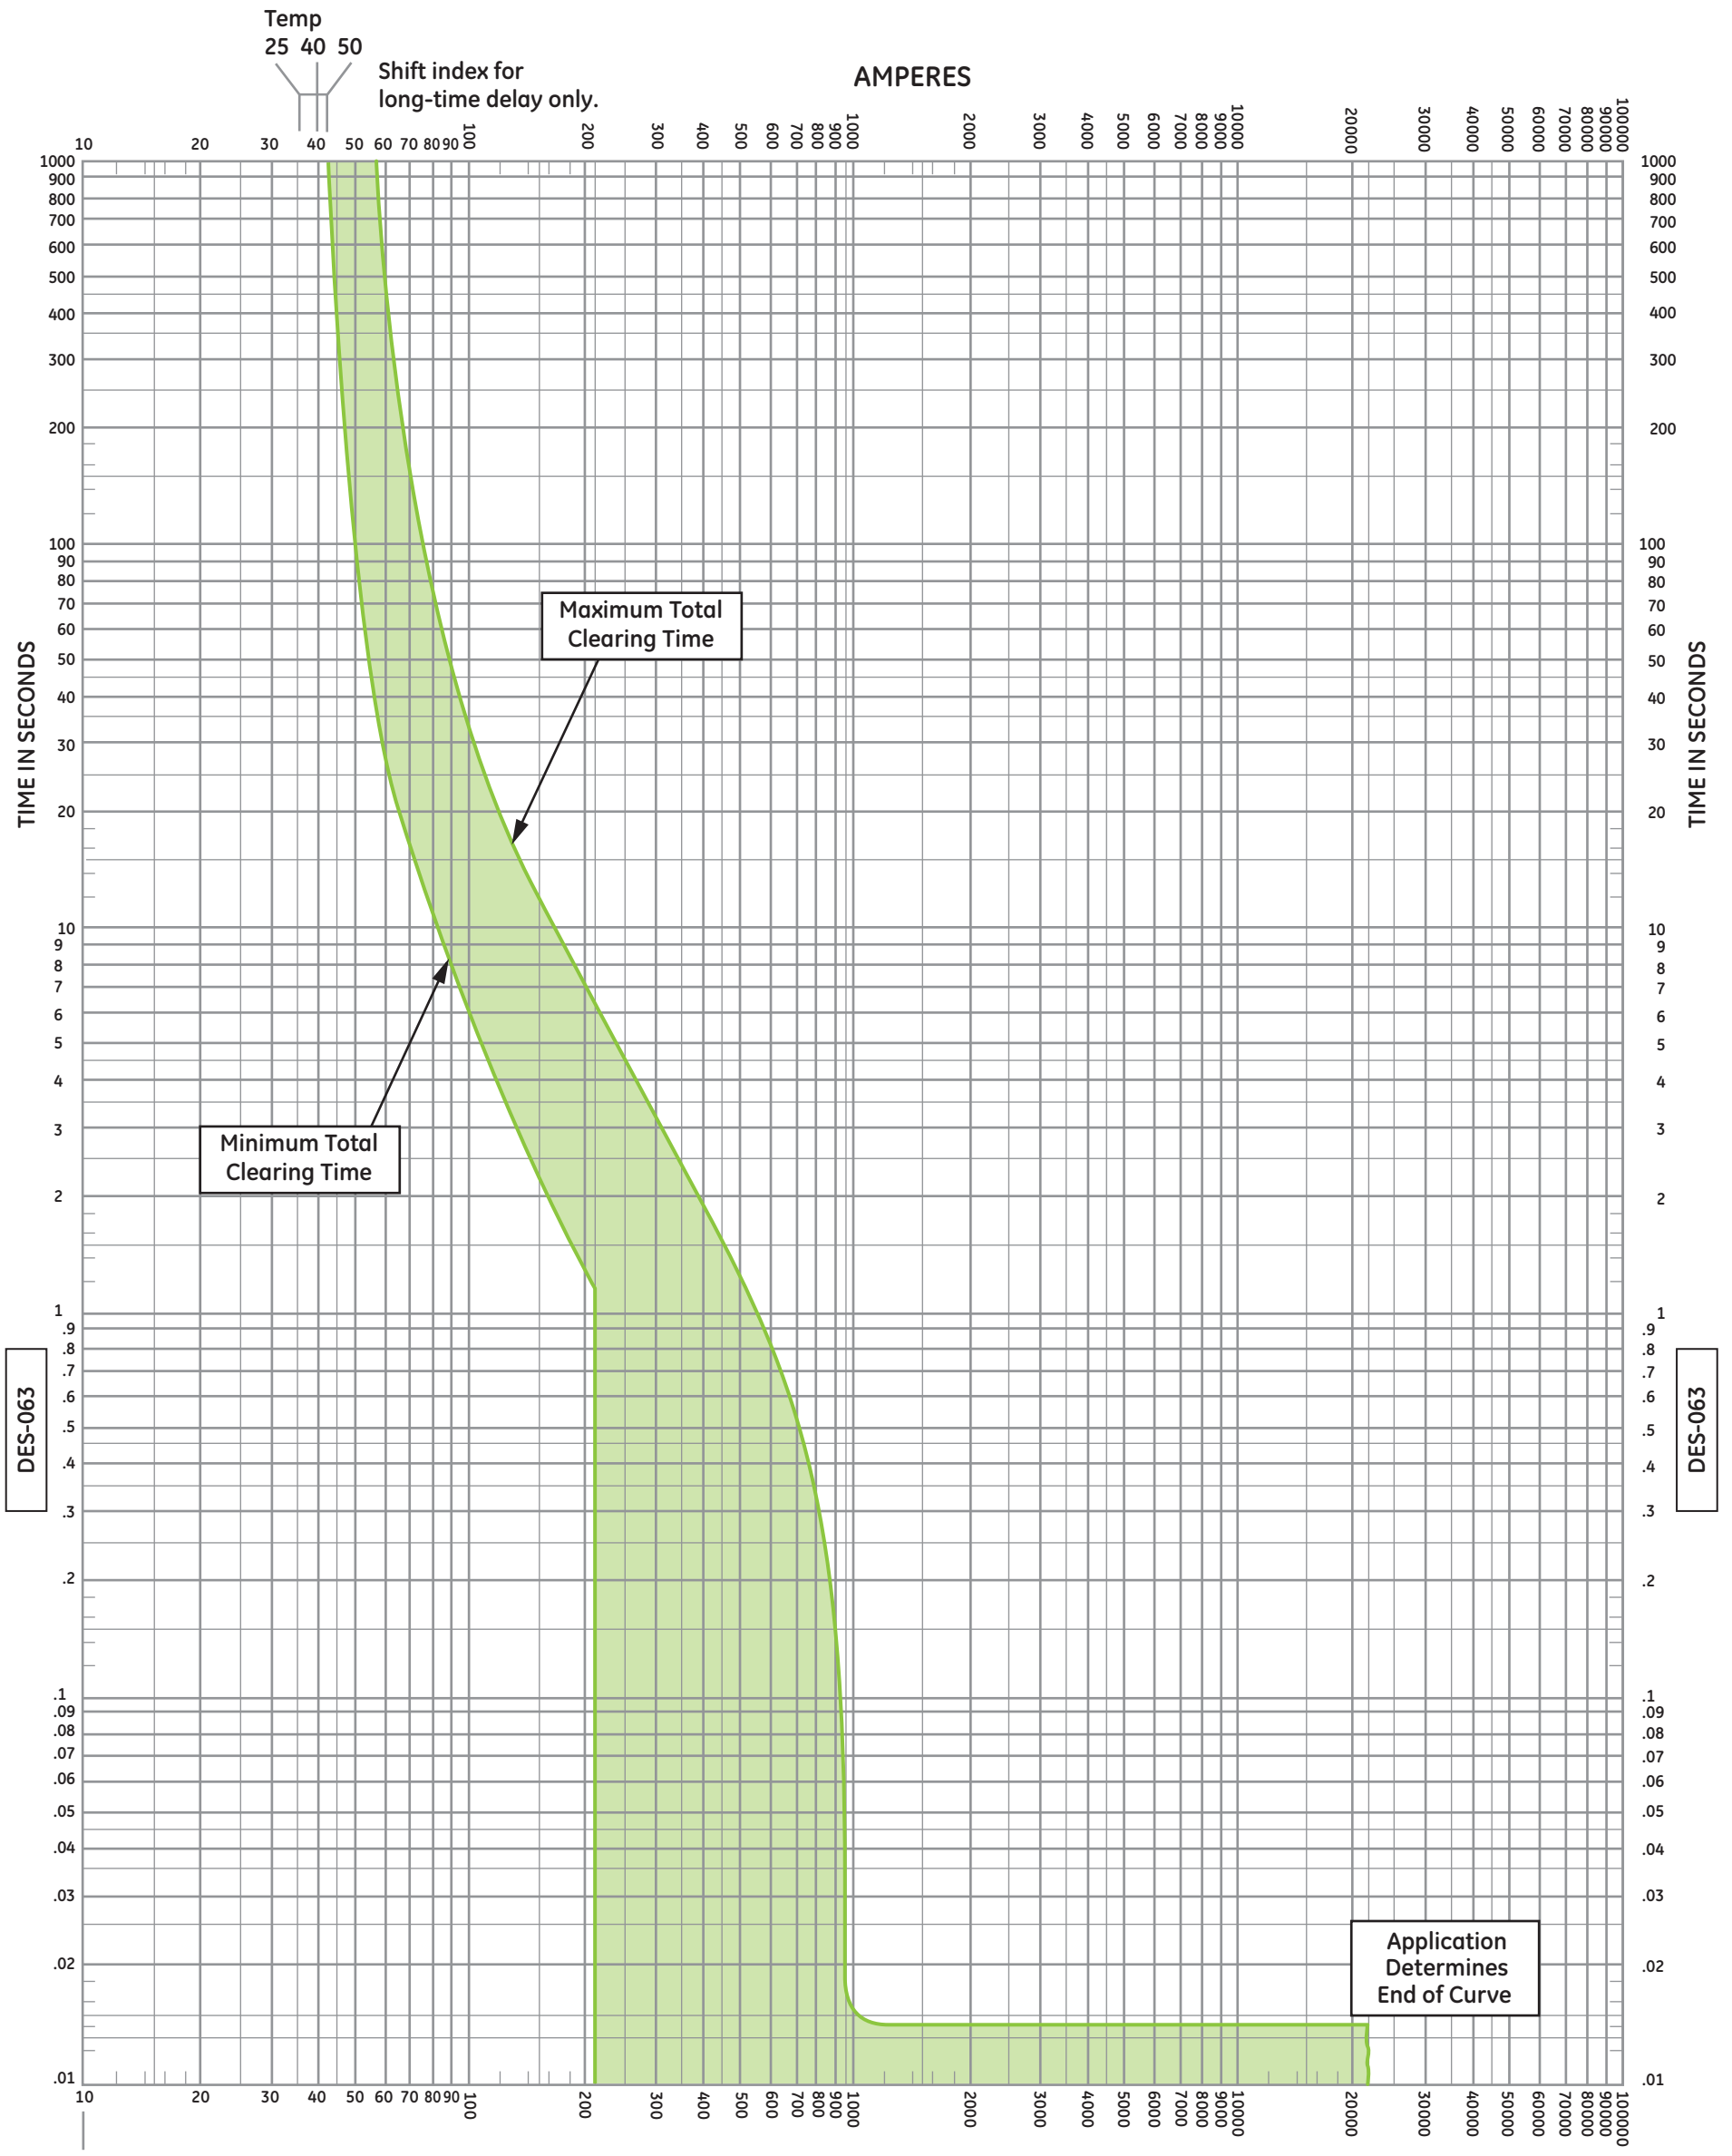

GE Consumer & Industrial - Electrical Distribution

Current Rating
40 Amperes

Voltage Rating
1-pole and 2-pole – 120/240 Vac

Frequency Rating
50/60 Hertz

Molded Case Circuit Breakers
Q Line

Type THQB/THHQB - Model C
Long-time Delay and Instantaneous
Time-current Curves

Curves show circuit breaker in open air, 40ºC ambient, wired with conductors of corresponding rating, no prior load. For all other ambients, use rating shift index at top of sheet.

DES-063
Supersedes GES-9888

Adjustments

Long-time delay thermal trip: not adjustable.

Instantaneous magnetic trip: not adjustable.