


MULTIPLE OF TRIP RATING PLUG

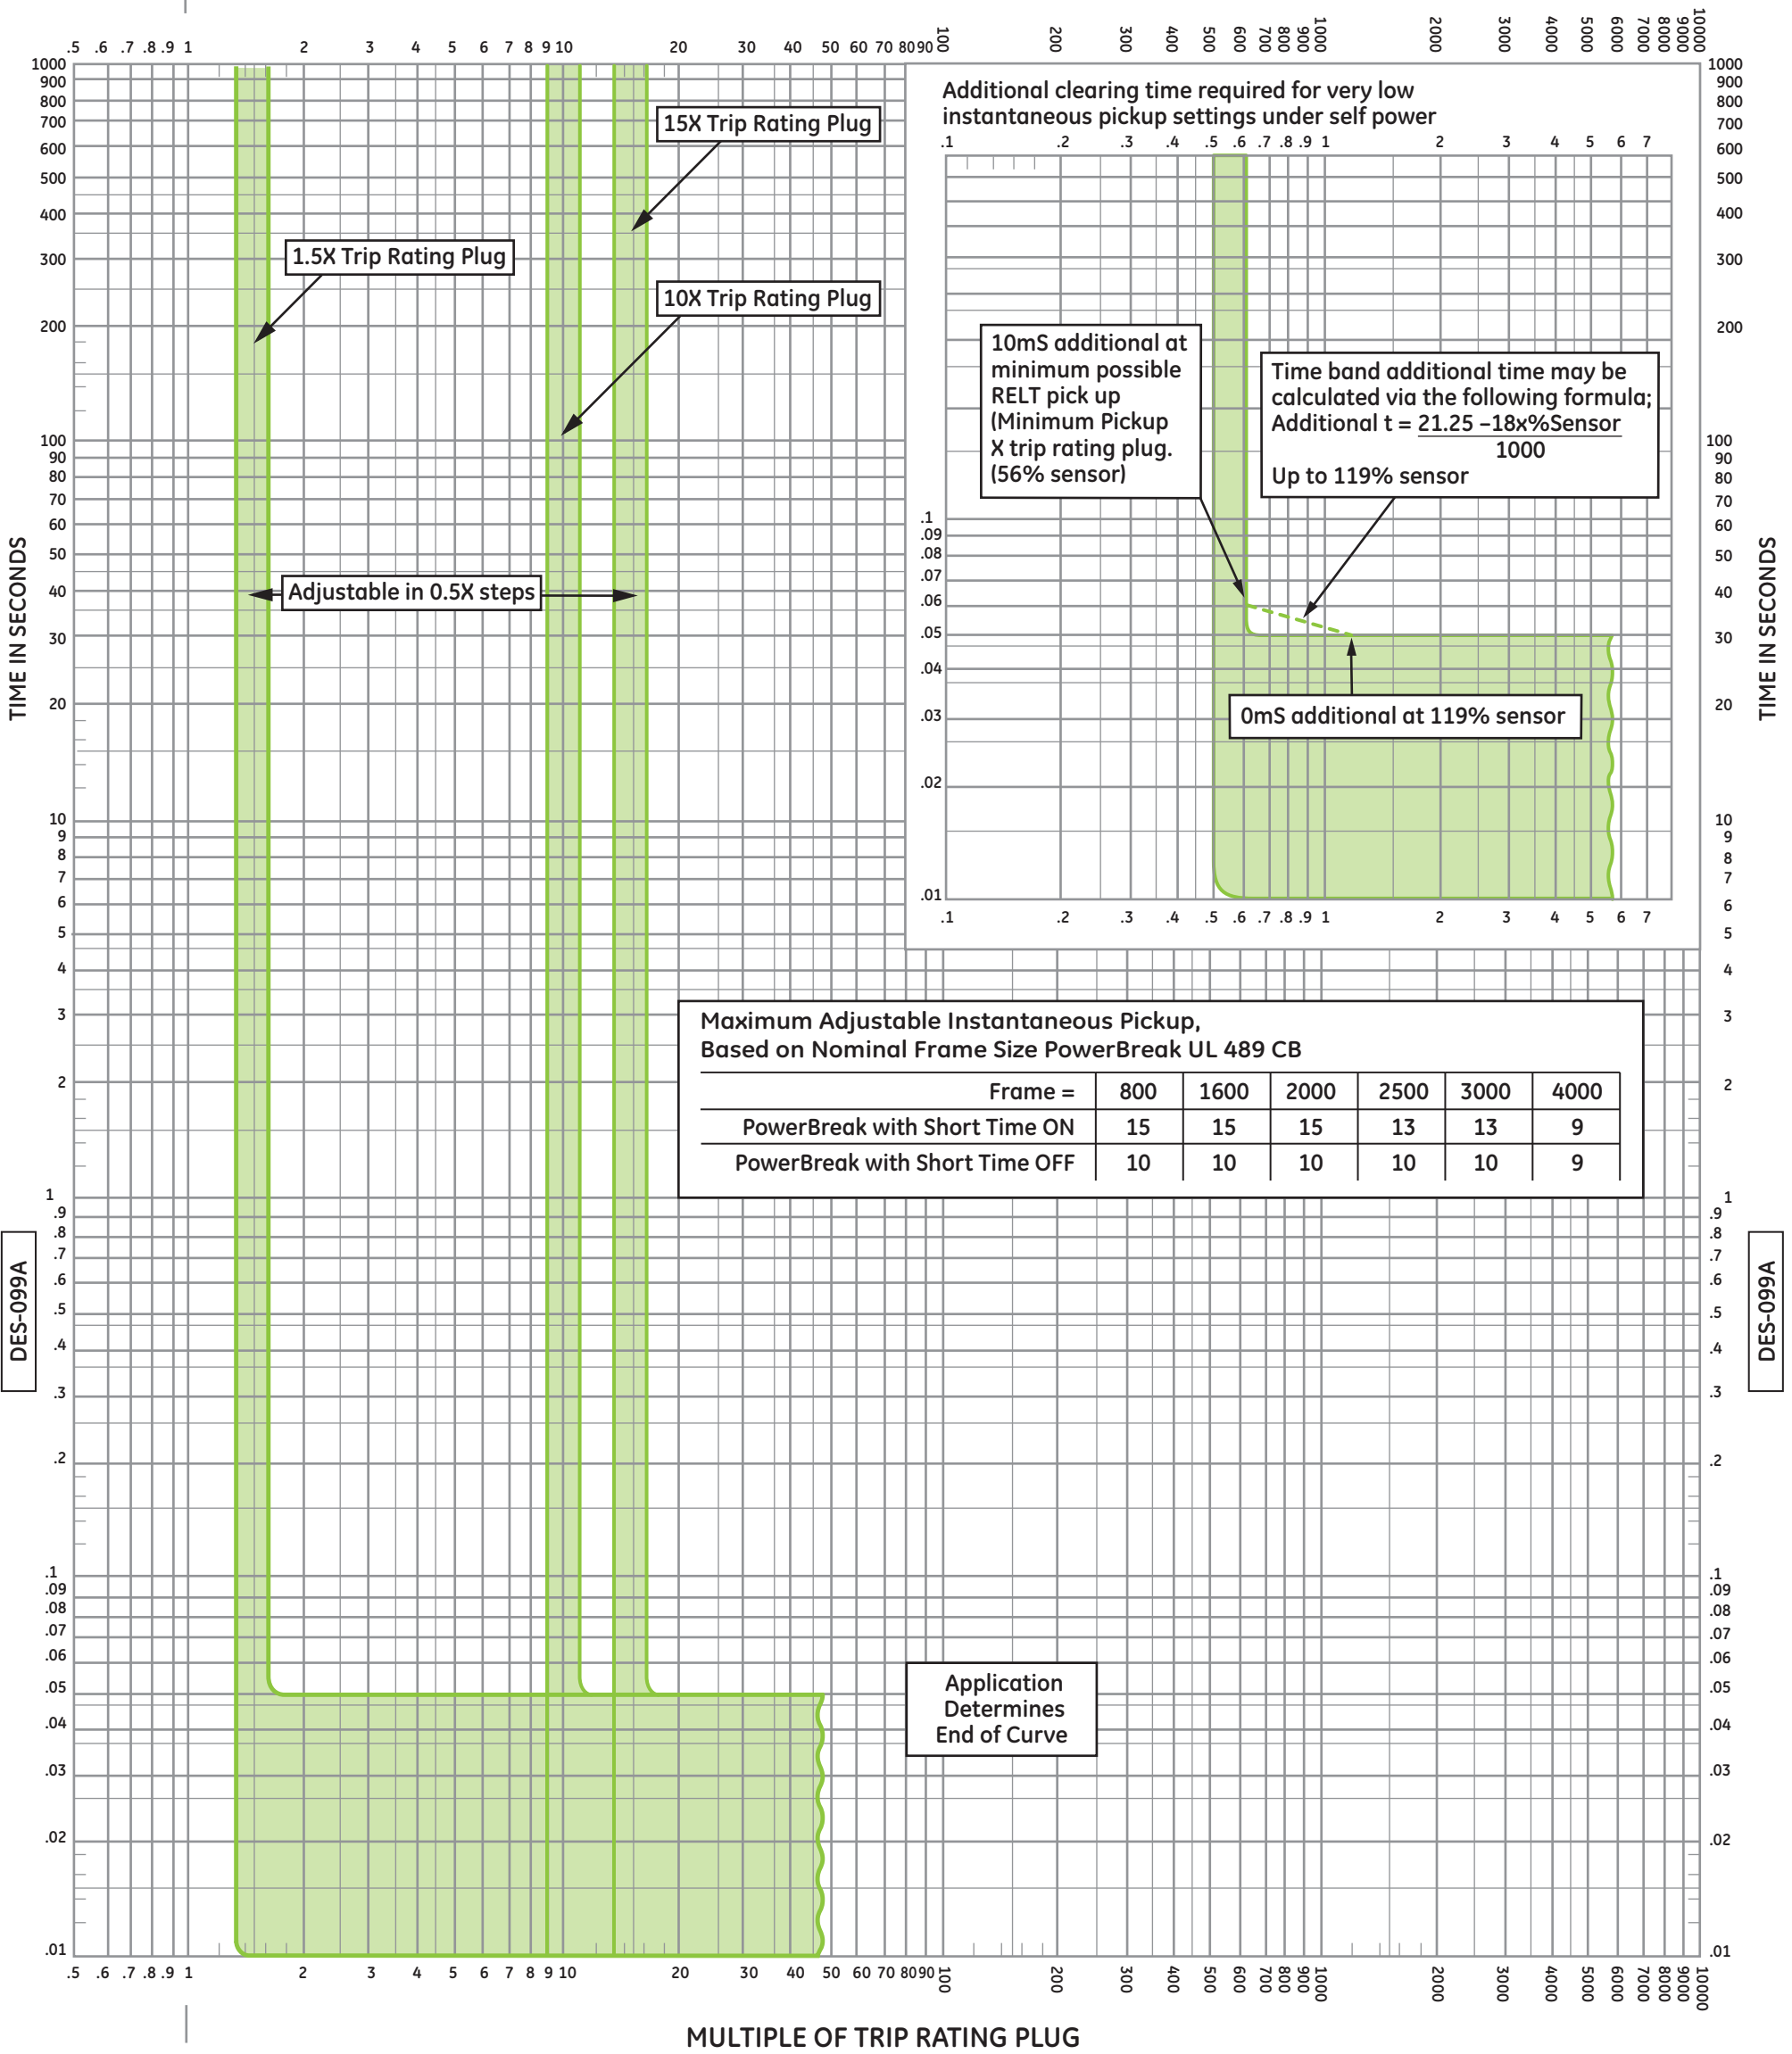

Low-Voltage Circuit Breakers

DES-099A

Frames 800-4000A PowerBreak

Applicable with trip units used to retrofit existing installed GE Power Break Circuit Breakers
 UL 489 Stored Energy Mechanism Circuit Breakers
 Instantaneous Trip

Minimum Pickup 1.5X
 Maximum per frame

All Voltages: 600 Vac and below

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.