




C2000 Mini-Contactors 3- & 4-Pole AC and DC Controlled – Now Available up to 12A

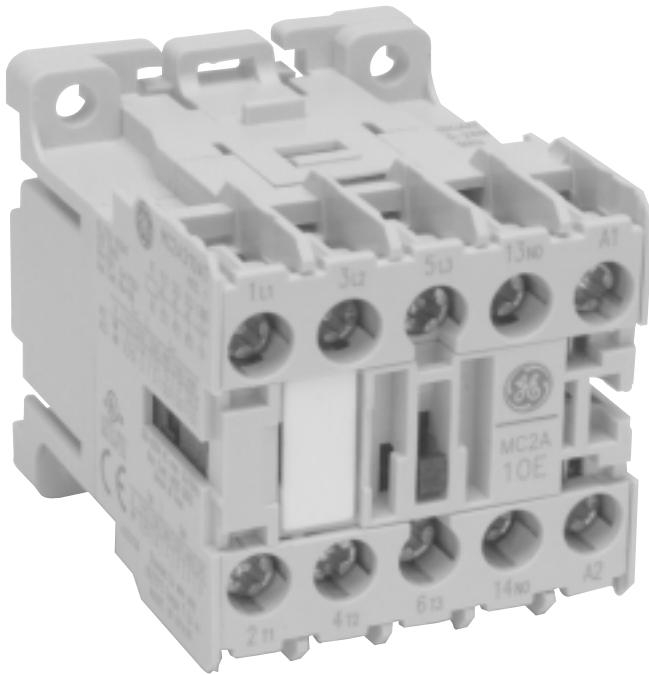

- Suitable for use on AC control circuits up to 600V and DC control circuits up to 240V
- All terminals are dual marked in accordance with EN50012 and U.S. marking standards
- May be mounted on 35 mm DIN rail EN50022-35
- References:
 - GEH-5475 – MC Mini-Contactor/MTO Thermal Overload Relay, U.S. Version
 - GEH-5931 – MC Mini-Contactor Global Instructions
 - GEH-5932 – MTO Thermal Overload Relay Global Instructions
 - GEP-1260 – GE Control Catalog, pages 5-10 and 5-11

3-Pole AC Controlled Contactors – FVNR, Open Form

AC-3 Max. Full Load Amps @460 V	Three-Phase Horsepower (AC-3) Motor Voltage – 60 Hz				KW (AC3) 380/415 50 Hz	Single-Phase HP (AC-3) Motor Voltage – 60 Hz		Auxiliary Contacts A600, Q600		Catalog Number①	List Price, GO-10A1	Approx. Weight Each
	200-208	220-240	440-480	550-600		115	230	NO	NC			
Standard Screw-Type Terminals												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2A310AT*	\$51.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2A301AT*	\$51.00	6 oz.
Faston (2x2.8mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2A310AF*	\$54.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2A301AF*	\$54.00	6 oz.
Faston (1x6.3mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2A310AH*	\$54.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2A301AH*	\$54.00	6 oz.
Printed Circuit Board Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2A310AI*	\$54.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2A301AI*	\$54.00	6 oz.

3-Pole DC Controlled Contactors – FVNR, Open Form

AC-3 Max. Full Load Amps @460 V	Three-Phase Horsepower (AC-3) Motor Voltage – 60 Hz				KW (AC3) 380/415 50 Hz	Single-Phase HP (AC-3) Motor Voltage – 60 Hz		Auxiliary Contacts A600, Q600		Catalog Number①	List Price, GO-10A1	Approx. Weight Each
	200-208	220-240	440-480	550-600		115	230	NO	NC			
Standard Screw-Type Terminals												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2C310AT*	\$61.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2C301AT*	\$61.00	8 oz.
Faston (2x2.8mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2C310AF*	\$64.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2C301AF*	\$64.00	8 oz.
Faston (1x6.3mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2C310AH*	\$64.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2C301AH*	\$64.00	8 oz.
Printed Circuit Board Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	1	0	MC2C310AI*	\$64.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	1	MC2C301AI*	\$64.00	8 oz.

① Complete catalog number by replacing the asterisk (*) in the catalog number with the digit corresponding to the control circuit voltage and frequency from the tables on reverse.

C2000 Mini-Contactors

3- & 4-Pole AC and DC Controlled – Now Available up to 12A

4-Pole AC Controlled Contactors – FVNR, Open Form

AC-3 Max. Full Load Amps @460 V	Three-Phase Horsepower (AC-3) Motor Voltage – 60 Hz				KW (AC3)	Single-Phase HP (AC-3) Motor Voltage – 60 Hz		Main Contact Configuration		Catalog Number①	List Price, GO-10A1	Approx. Weight Each
	200-208	220-240	440-480	550-600		380/415 50 Hz	115	230	NO			
Standard Screw-Type Terminals												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2A400AT*	\$56.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2AB00AT*	56.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	4	MC2AA00AT*		6 oz.
Faston (2x2.8mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2A400AF*	59.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2AB00AF*	59.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	4	MC2AA00AF*	59.00	6 oz.
Faston (1x6.3mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2A400AH*	59.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2AB00AH*	59.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	4	MC2AA00AH*	59.00	6 oz.
Printed Circuit Board Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2A400AI*	59.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2AB00AI*	59.00	6 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	0	4	MC2AA00AI*	59.00	6 oz.

4-Pole AC Controlled Contactors – FVNR, Open Form

AC-3 Max. Full Load Amps @460 V	Three-Phase Horsepower (AC-3) Motor Voltage – 60 Hz				KW (AC3)	Single-Phase HP (AC-3) Motor Voltage – 60 Hz		Main Contact Configuration		Catalog Number①	List Price, GO-10A1	Approx. Weight Each
	200-208	220-240	440-480	550-600		380/415 50 Hz	115	230	NO			
Standard Screw-Type Terminals												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2C400AT*	\$65.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2CB00AT*	65.00	8 oz.
Faston (2x2.8mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2C400AF*	68.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2CB00AF*	68.00	8 oz.
Faston (1x6.3mm) Quick Connection Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2C400AH*	68.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2CB00AH*	68.00	8 oz.
Printed Circuit Board Terminals (sold in multiples of 10 only)												
12.0	3	3	7.5	7.5	5.5	0.5	2.0	4	0	MC2C400AI*	68.00	8 oz.
12.0	3	3	7.5	7.5	5.5	0.5	2.0	2	2	MC2CB00AI*	68.00	8 oz.

① Complete catalog number by replacing the asterisk (*) in the catalog number with the digit corresponding to the control circuit voltage and frequency from the tables below.

Coil Selection

AC Coils

Coil	Voltage							
AC 60 Hz	24	–	120	208	240/277	–	480	600
AC 50 Hz	–	24	110	–	220/240	380	415	500
Cat. No. Digit	C	D	J	M	N	U	W	Y

DC Coils

Coil	Voltage				
DC	12	24	48	125	250
Cat. No. Digit	B	D	G	L	S

Overload Relays – Fixed Heater with Differential Protection for Direct Mounting to Contactor

Packaged in multiples of 10 units. Each catalog number represents one unit.

Current Range Setting		Max. Fuse Rating		Catalog Number	List Price, GO-10A1	Approximate Weight Each
Min.	Max.	HRC11	K5			
10.0	14.0	50	50	MT03P	\$40.00	4 oz.



GE Industrial Systems

General Electric Company
41 Woodford Avenue, Plainville, CT 06062
www.GEindustrial.com

© 2004 General Electric Company