


RV Park Power Equipment

Model Number Nomenclature

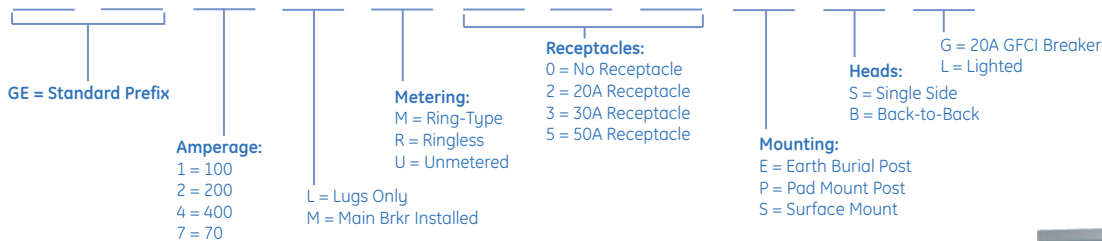

General Characteristics

- Surface, Earth Burial, or Pad Mount
- Lighted or Unlighted
- Lighted Units Include 7 Watt Incandescent Lamp
- Metered or Unmetered
- Metered Units Include Ring-Type or Ringless Meter Socket
- Accommodations for Utility Sealing
- Loop Feed Provisions Standard on Pedestal Units
- Rugged 16-Gauge Zinc Coated G-90 Steel
- High Quality Electro-Deposition Paint Finish
- Rolled Edge Pedestal Bottoms Protect Service Cable
- Padlocking Provisions on Main Door
- Stay Open Position on Door for Convenience
- Standard Industry Receptacle Configurations
- 20A GFCI Meets 2008 NEC Requirements for Tamper and Weather Resistance

- Single phase, three wire, 120/240 VAC, 10 kAIC rated
- UL/CUL Listed (Power Outlets)
- Suitable for use as Service Entrance Equipment when installed in accordance with the National Electric Code

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

GE Energy
41 Woodford Avenue, Plainville, CT 06062
www.geelectrical.com
© 2010 General Electric Company



Typical Unmetered Earth Burial Pedestal