



PowerMark Gold* Load Centers

100 - 200 Amp, 20/40 Circuit

- Single Phase, Three Wire, 120/240 VAC, 22 kAIC Rated
- UL Listed (Panelboards No. 67)
- 60°C/75°C Conductor Rating
- Suitable for use as Service Entrance Equipment when installed in accordance with the National Electric Code




Technical Data

Main Ampere Rating	1 Pole	2 Pole	1 Pole	2 Pole	Total 1 Pole Spaces	Main Style	Catalog #	Front Type	Feed	Main Wire Size (AWG/kcmil) Cu-Al	Equipment Ground Kit	Box #
	1" Spaces		1/2" Spaces									
100	20	10	—	—	20	Main Breaker	TM2010CCU	Combination Flush/Surface	Top Bottom	4-1/0	TGK24 (order separately)	6
200	18	10	40	18	40	Main Breaker	TM2020CCU	Combination Flush/Surface	Top Bottom	1-250 (Cu), 2/0-250 (Al)	TGK32 (order separately) TGK24 (order separately) TGK42 (order separately) TGK32 (order separately)	8
							TM2020CCUW	White Combo Flush/Surface				
							TM2020CCUG	Combination Flush/Surface				
							TM2020CCUGW	White Combo Flush/Surface				
	20	10	40	18	40	Main Lug / Combination	TM2020RCU		Top	1-250 (Cu), 2/0-250 (Al)	TGK24 (order separately) TGK42 (order separately)	R6
							TLM2020CCU ¹	Combination Flush/Surface	Top Bottom			
TLM2020CCUW ^{1,2}							White Combo Flush/Surface					
TLM2020CCUG ¹							Combination Flush/Surface					
						TLM2020RCU ¹		Top		6-250	TGK24 (order separately) TGK42 (order separately)	R6A

¹ For main breaker, order THQMVXXXD circuit breaker from BuyLog page 1-6.
² Minimum order quantity is 40 for below 24 circuits; Minimum order quantity is 24 for 24 circuits and above. (See DEE-590).

Dimensions (inches)

Box	Width	Height	Depth
6	14	23	3 3/4
8	14	26 7/16	3 3/4
R6	14	35 3/17	4 5/8
R6A	13	33	5

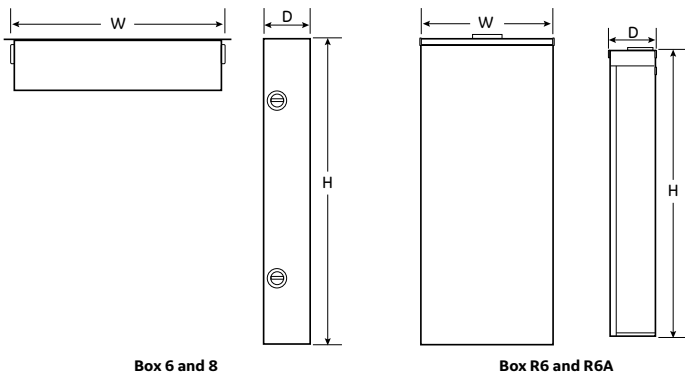

Breaker Symbol	Breaker Fill	
	1" THQL	1/2" THQP
	1	—
	1	2

Terminal Symbol	Wire Range (AWG/kcmil)	
	Cu	Al
	6-2/0	6-2/0
	1-300	1-300

