

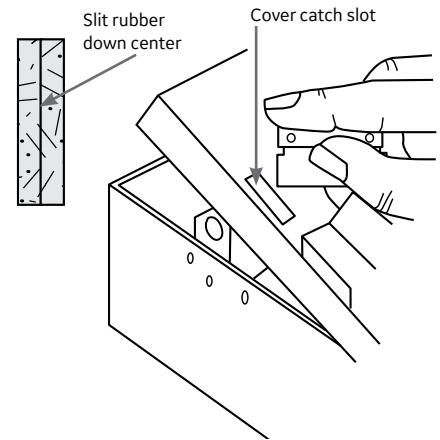


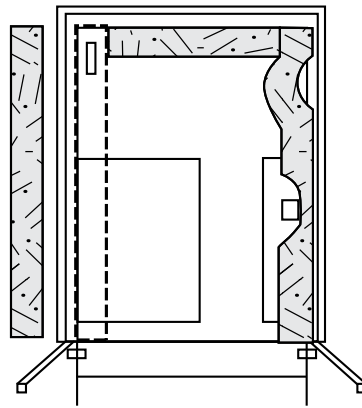

# GEH-3471C Installation Instructions

## Safety Switch Door Gaskets

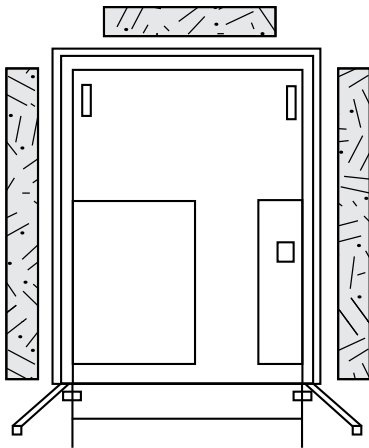

### Step 1

- Cut rubber into three lengths.

### Step 2

- Peel tape from length of rubber.
- Press adhesive side firmly against cover.
- Repeat for each length.

**Note:** On 200A, 400A and 600A TH devices, bend rubber to cover slot in cover. Press rubber between latch and edge of box.

If you have 200A, 400A and 600A Outdoor Switches (Side Swing) use the remaining length of rubber for the fourth side of your cover.

### Step 3

- From outside of cover, carefully split rubber in the center of all slots. (Use sharp knife or razor blade.)



GE  
41 Woodford Avenue  
Plainville, CT 06062

© 2015 General Electric Company

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

GEH-3471C 1215