


MULTIPLES OF CURRENT RATING

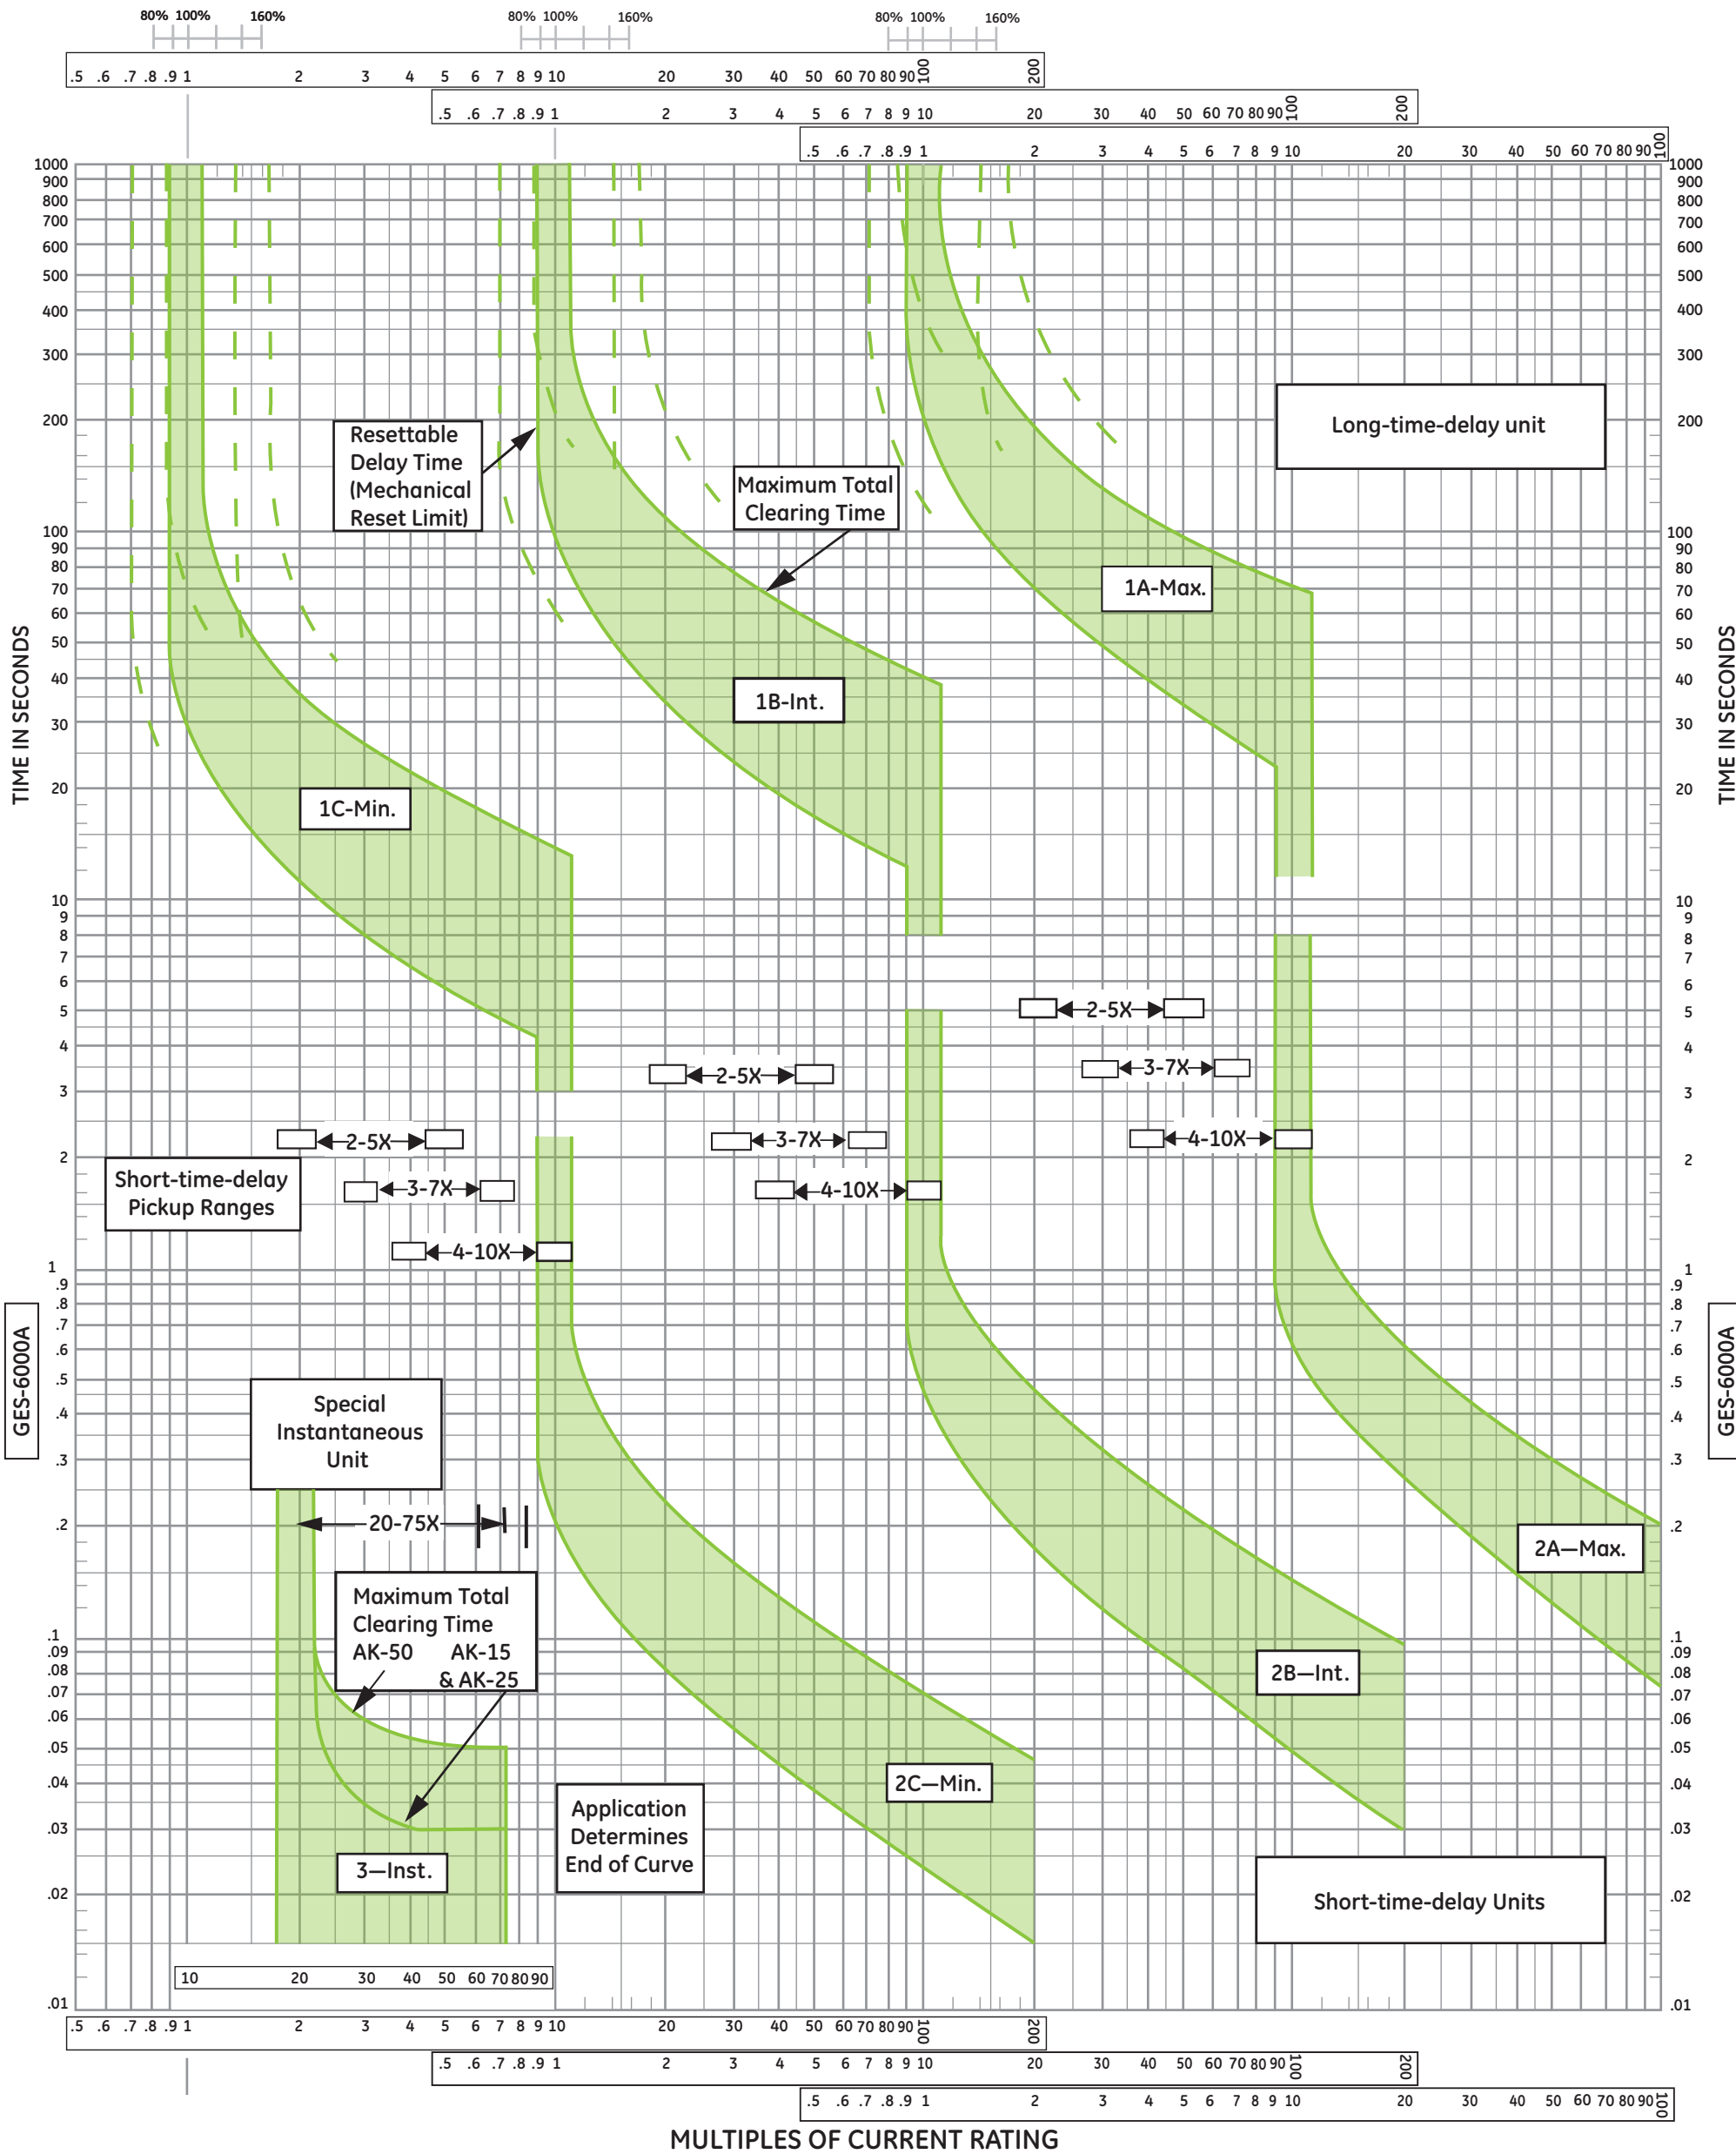

GE Consumer & Industrial -
Electrical Distribution

Current Ratings (Amperes)

AK-15	15, 20, 30, 40, 50, 70, 90, 100, 125, 150, 175, 200, 225
AK-25	40, 50, 70, 90, 100, 125, 150, 175, 200, 225, 250, 300, 350, 400, 500, 600
AK-50	200, 225, 250, 300, 350, 400, 500, 600, 800, 1000, 1200, 1600
AKT-50	2000

**Low-Voltage Power Circuit Breaker
EC-1 Series Trip Device**

Type AK

Long-time-delay, Short-time-delay
and Instantaneous Time-Current Curves

Curves apply at 60 Hertz for ambient temperature of 25°C


GES-6000A

Adjustments

Long-time-delay Unit: Pickup current setting are 80 to 160% of rating. (Settings higher than 100% do not increase the continuous current ratings.)

Short-time-delay Unit: Pickup current settings are 2 to 5X, or 3 to 7X, or 4 to 10X of ratings.

Instantaneous Unit: Special pickup current settings are 20-75X of ratings.

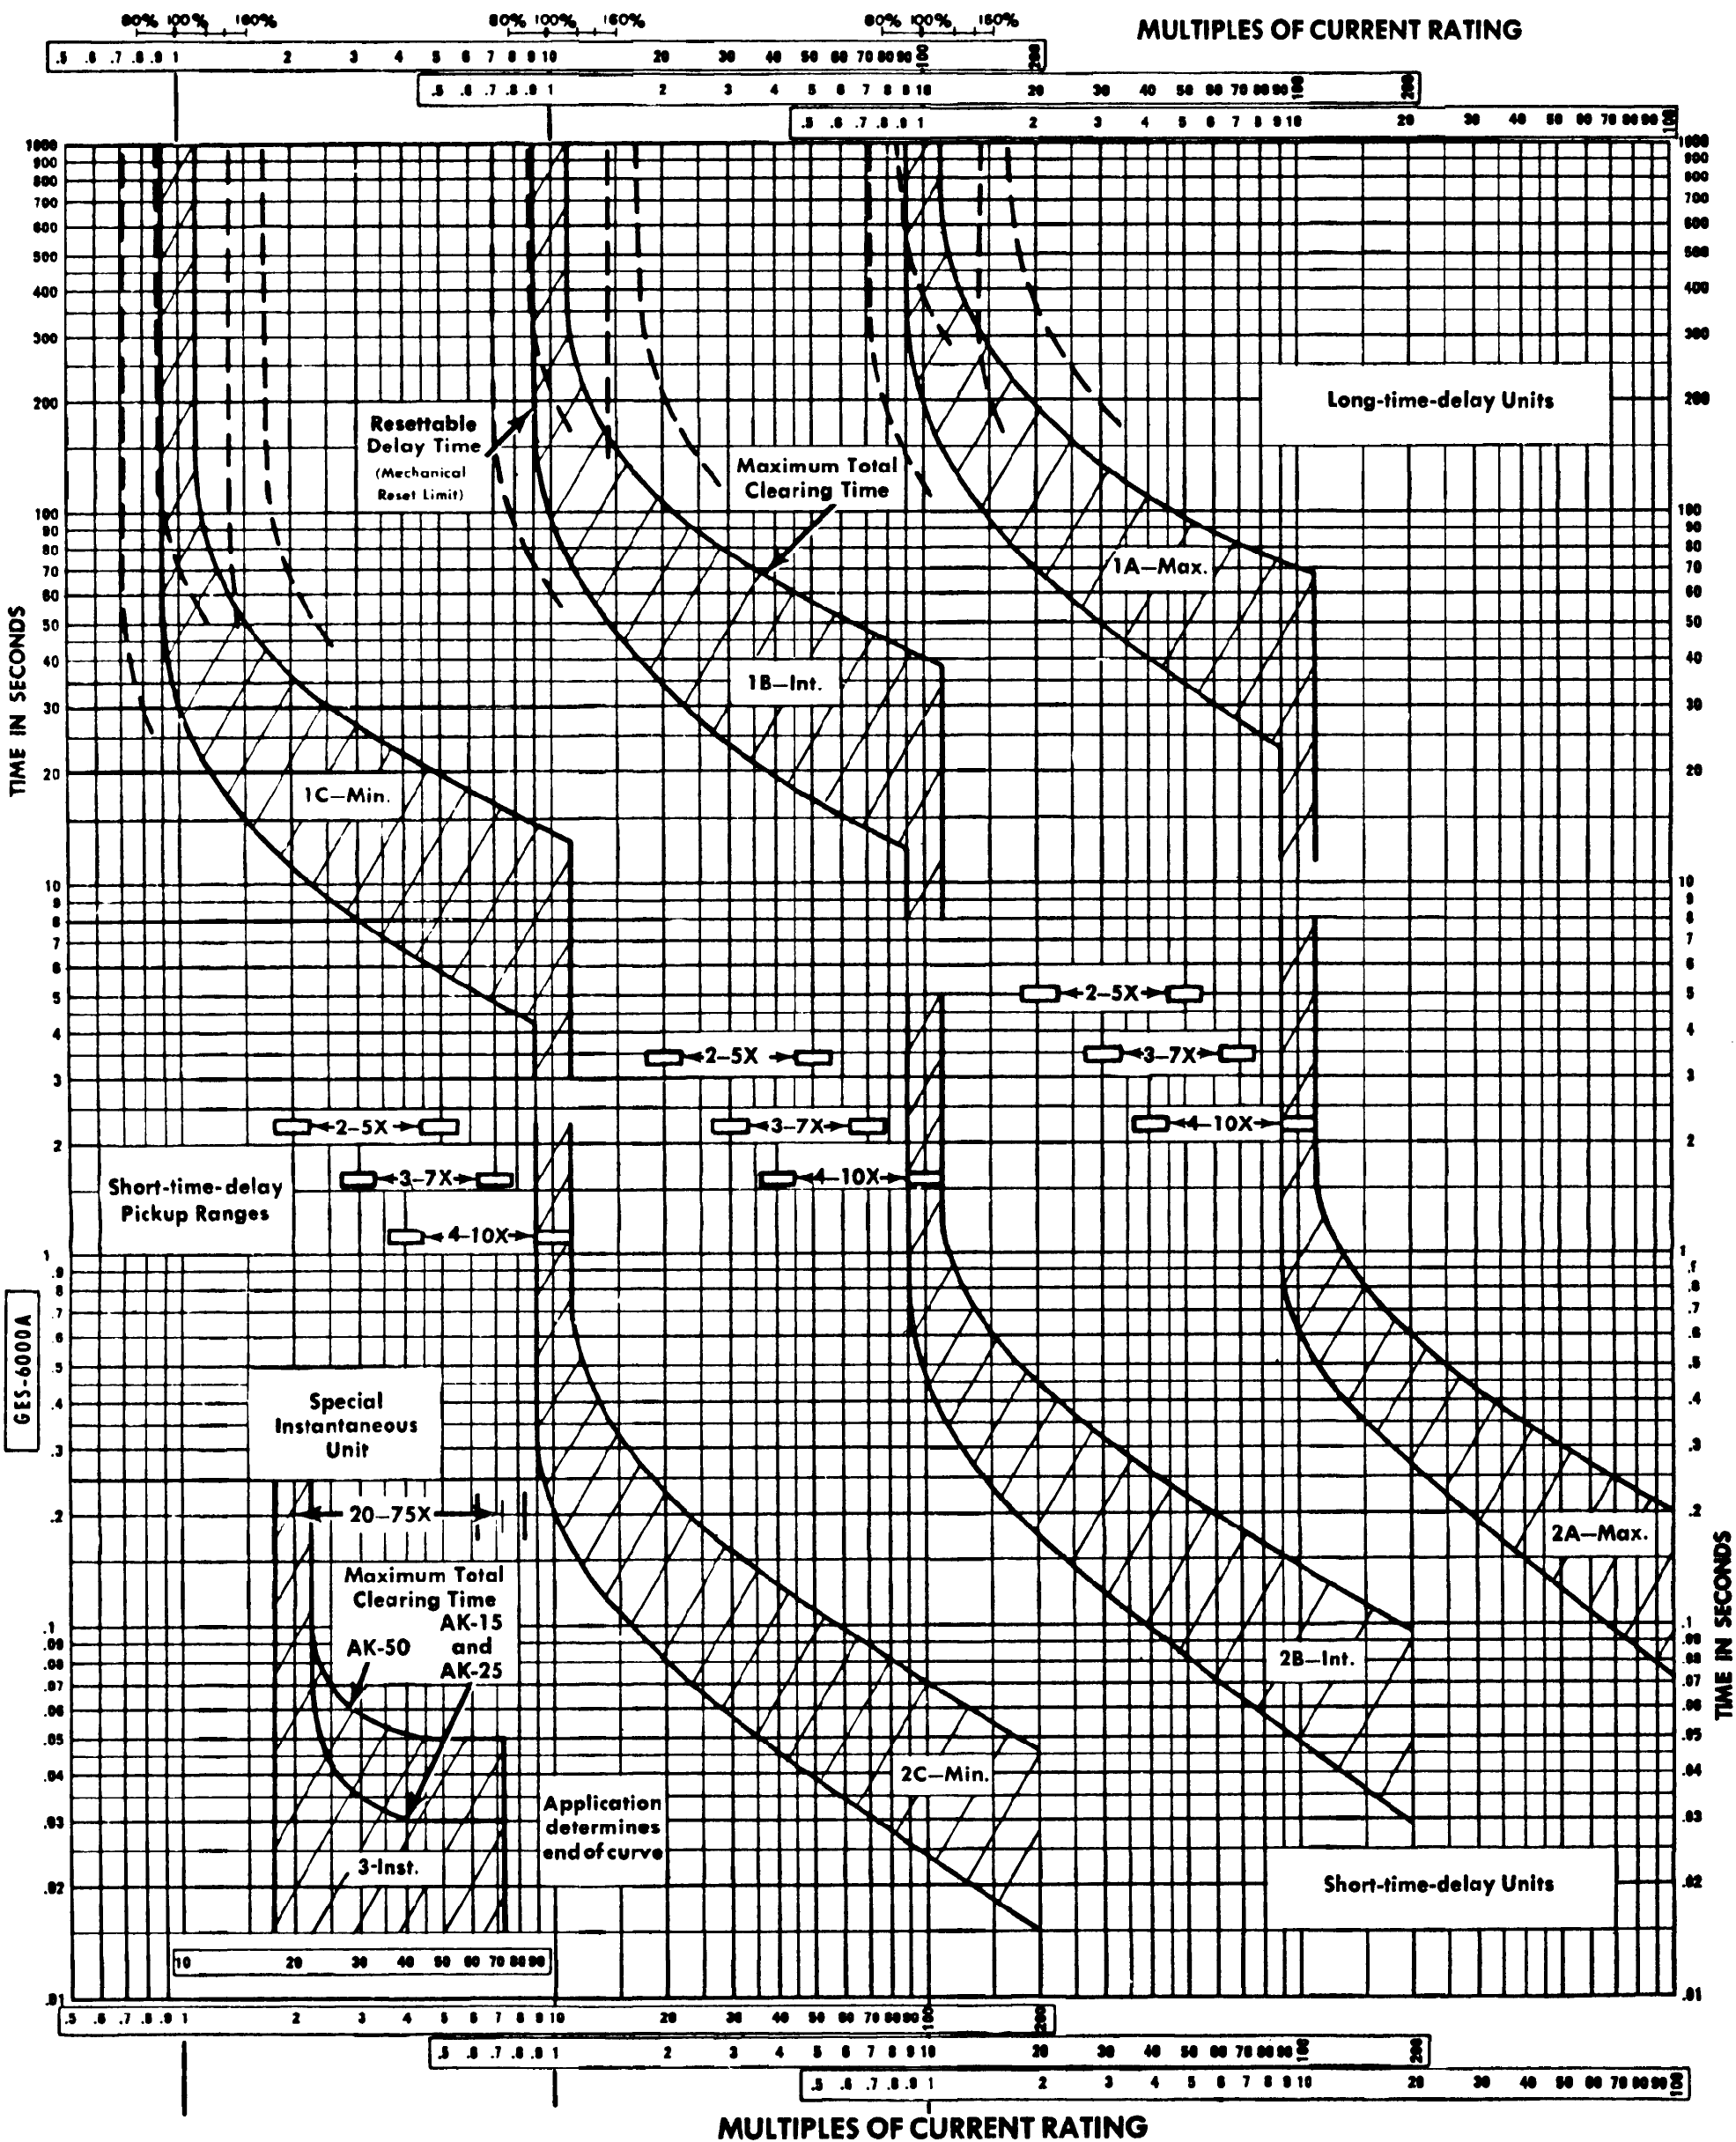

MULTIPLES OF CURRENT RATING

<p>GENERAL ELECTRIC</p> <p>Current Ratings (Amperes)</p> <p>AK-15 15, 20, 30, 40, 50, 70, 90, 100, 125 150, 175, 200, 225</p> <p>AK-25 40, 50, 70, 90, 100, 125, 150, 175 200, 225, 250, 300, 350, 400, 500 600</p> <p>AK-50 200, 225, 250, 300, 350, 400, 500 600, 800, 1000, 1200, 1600</p> <p>AKT-50 2000</p>	<p>TYPE AK LOW-VOLTAGE POWER CIRCUIT BREAKER</p> <p>EC-1 SERIES TRIP DEVICE</p> <p>Long-time-delay, Short-time-delay and Instantaneous Time-current Curves</p> <p>(Curves apply at 60 Hertz for ambient temperature of 25 C)</p>	<p>GES-6000A</p> <p>Adjustments</p> <p>Long-time-delay Unit: Pickup current settings are 80 to 160% of rating. (Settings higher than 100% do not increase the continuous current ratings.)</p> <p>Short-time-delay Unit: Pickup current settings are 2 to 5X, or 3 to 7X, or 4 to 10X of ratings.</p> <p>Instantaneous Unit: Special pickup current settings are 20-75X of ratings.</p>
--	---	---