


MULTIPLES OF CURRENT RATING

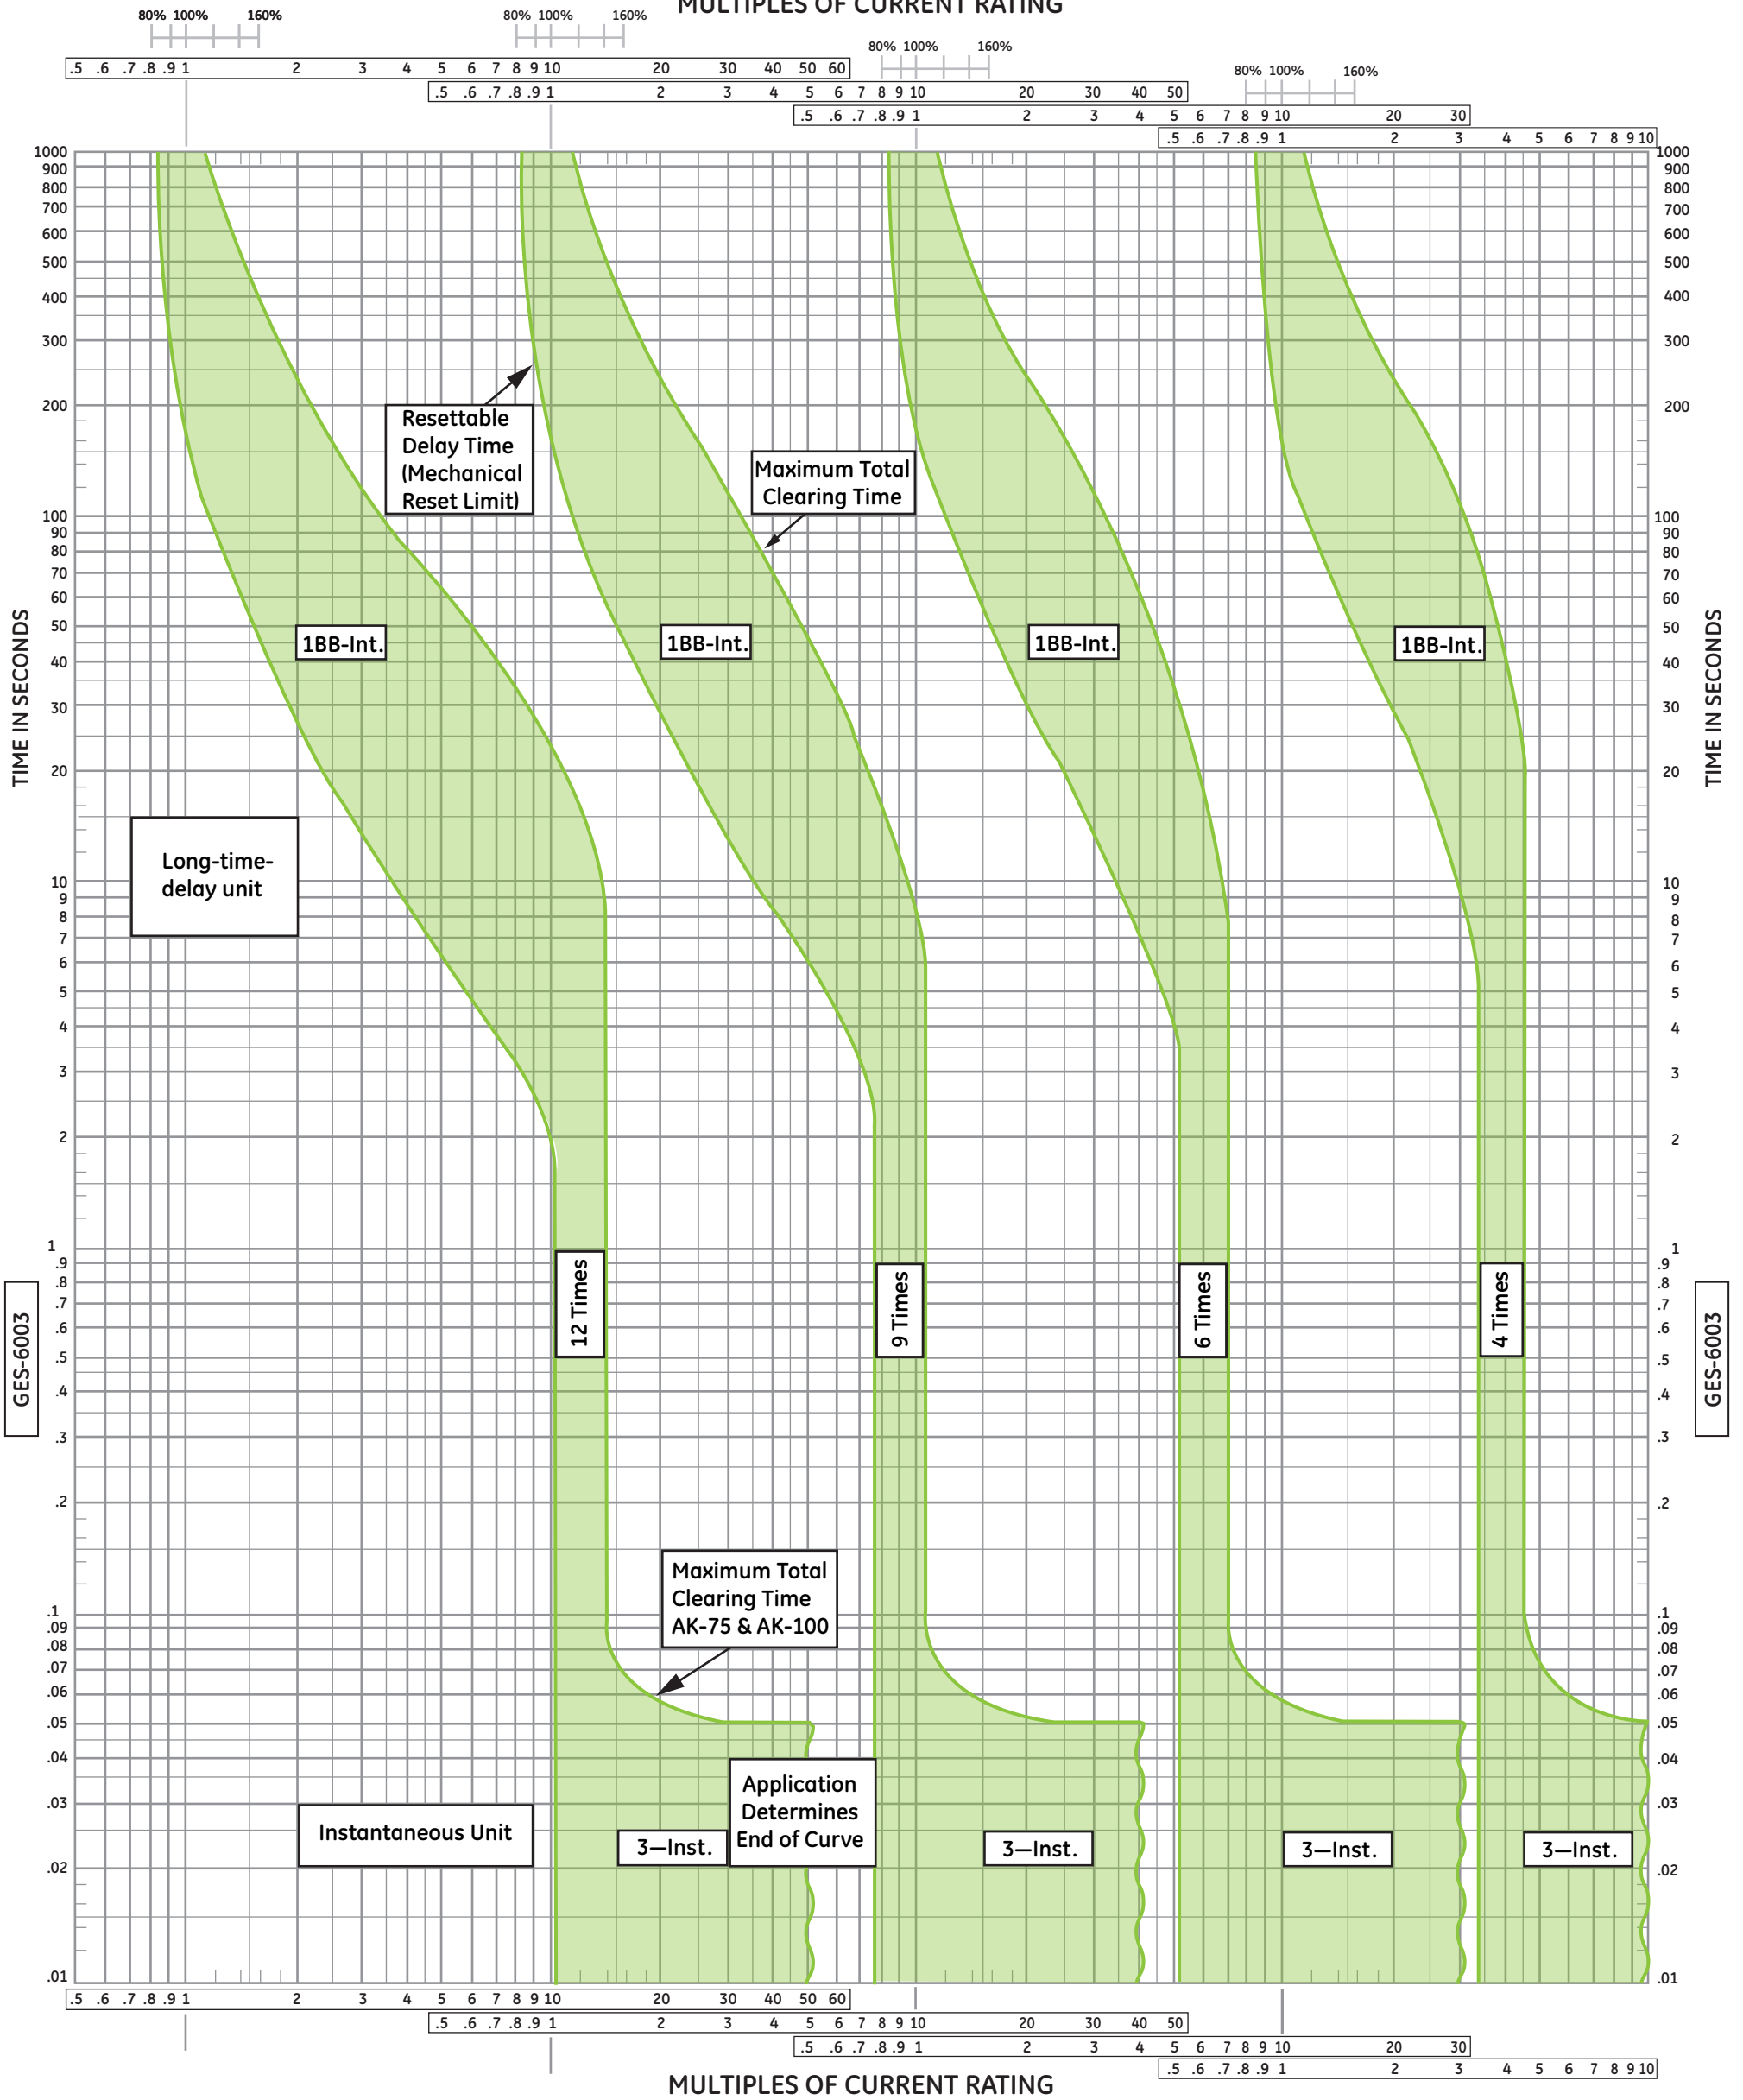

GE Consumer & Industrial -
Electrical Distribution

Current Ratings (Amperes)

AK-75	2000, 2500, 3000
AK-100	2000, 2500, 3000, 4000

Type AK Low-Voltage
Power Circuit Breaker
EC-1B Series Trip Device

1BB-3 Long-time-delay and Instantaneous
Time-Current Curves

Curves apply at 60 Hertz for ambient temperature of 25°C

GES-6003

Adjustments

Long-time-delay Unit: Pickup settings are 80 to 160% of rating. (Settings higher than 100% do not increase the continuous current rating.)

Instantaneous Unit: Pickup settings are 4 to 9X, or 6 to 12X (std.), or 9 to 15X of rating.