


MULTIPLES OF CURRENT RATING

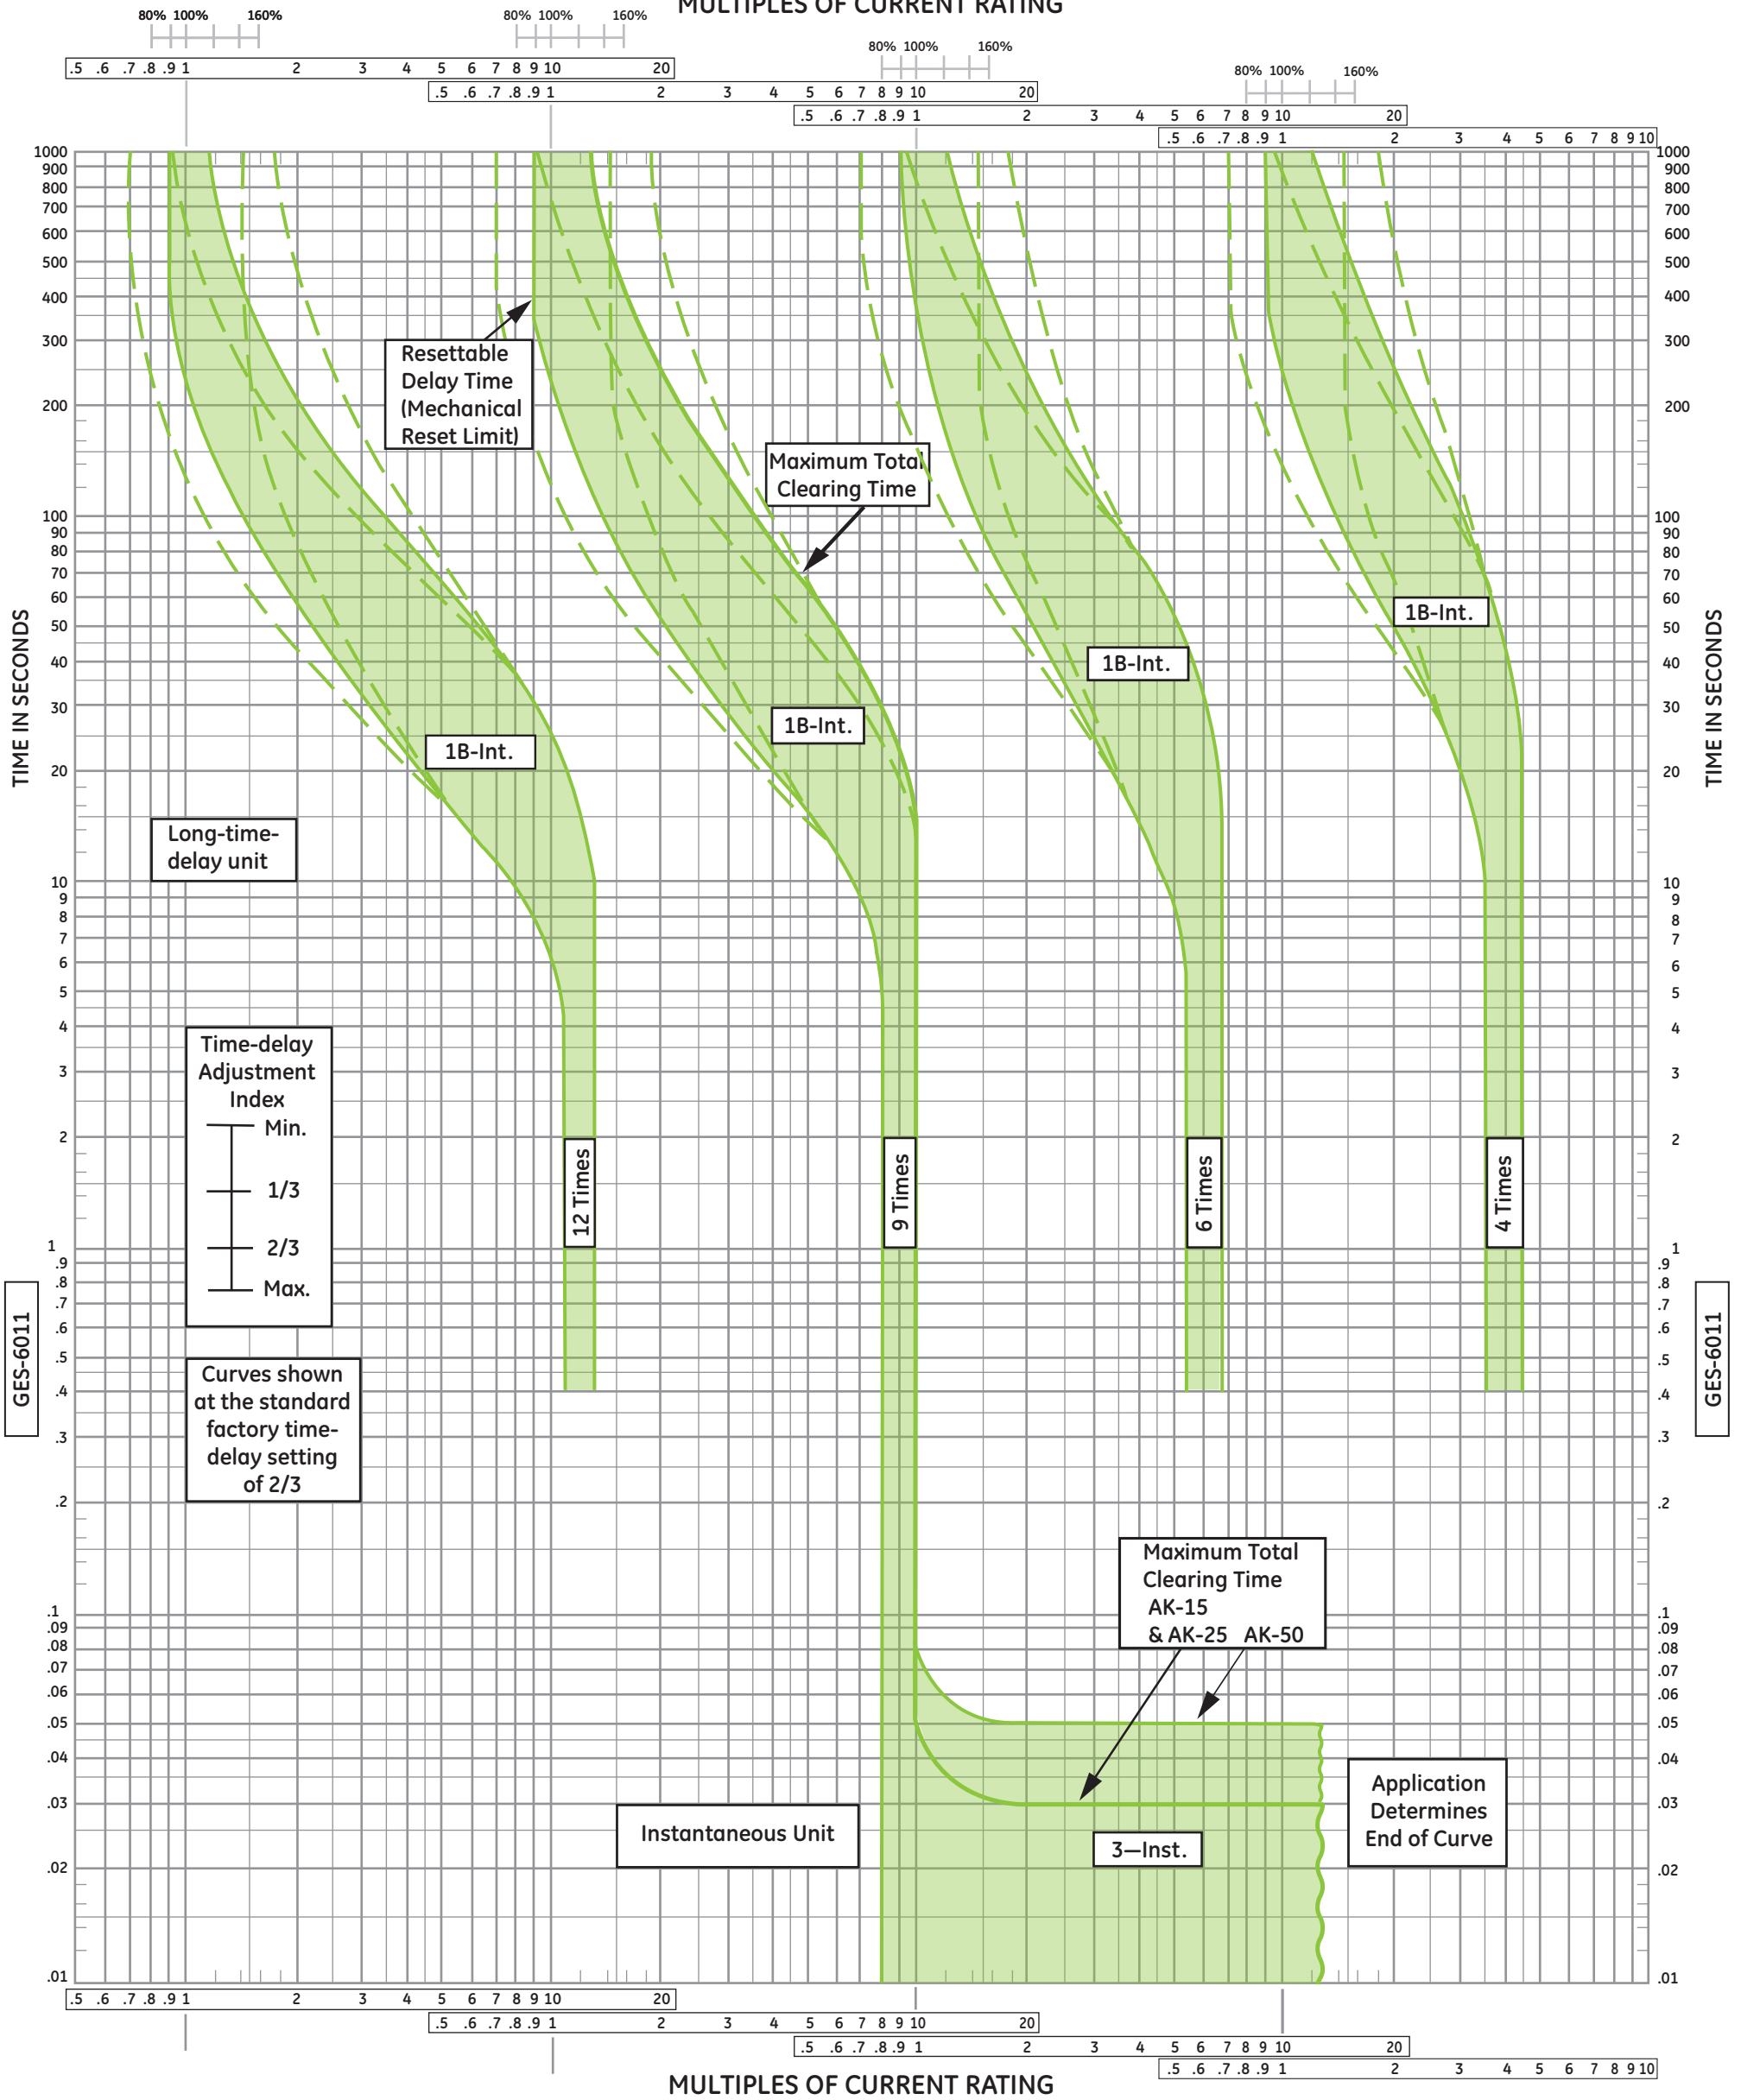

GE Consumer & Industrial -
Electrical Distribution

Current Ratings (Amperes)

AK-15	15, 20, 30, 40, 50, 70, 90, 100, 125, 150, 175, 200, 225
AK-25	40, 50, 70, 90, 100, 125, 150, 175, 200, 225, 250, 300, 350, 400, 500, 600
AK-50	200, 225, 250, 300, 350, 400, 500, 600, 800, 1000, 1200, 1600

Type AK Low-Voltage Power Circuit Breaker EC-2 & EC-2A Series Trip Device


1B-3 Long-time-delay and Instantaneous Time-Current Curves

Curves apply at 60 Cycles for ambient temperature of 25°C

GES-6011

Adjustments

Long-time-delay Unit: Pickup settings are 80 to 160% of rating. (Settings higher than 100% do not increase the continuous current rating.)
Instantaneous Unit: Pickup settings are 4 to 9X, or 6 to 12X (std.), or 9 to 15X of rating.

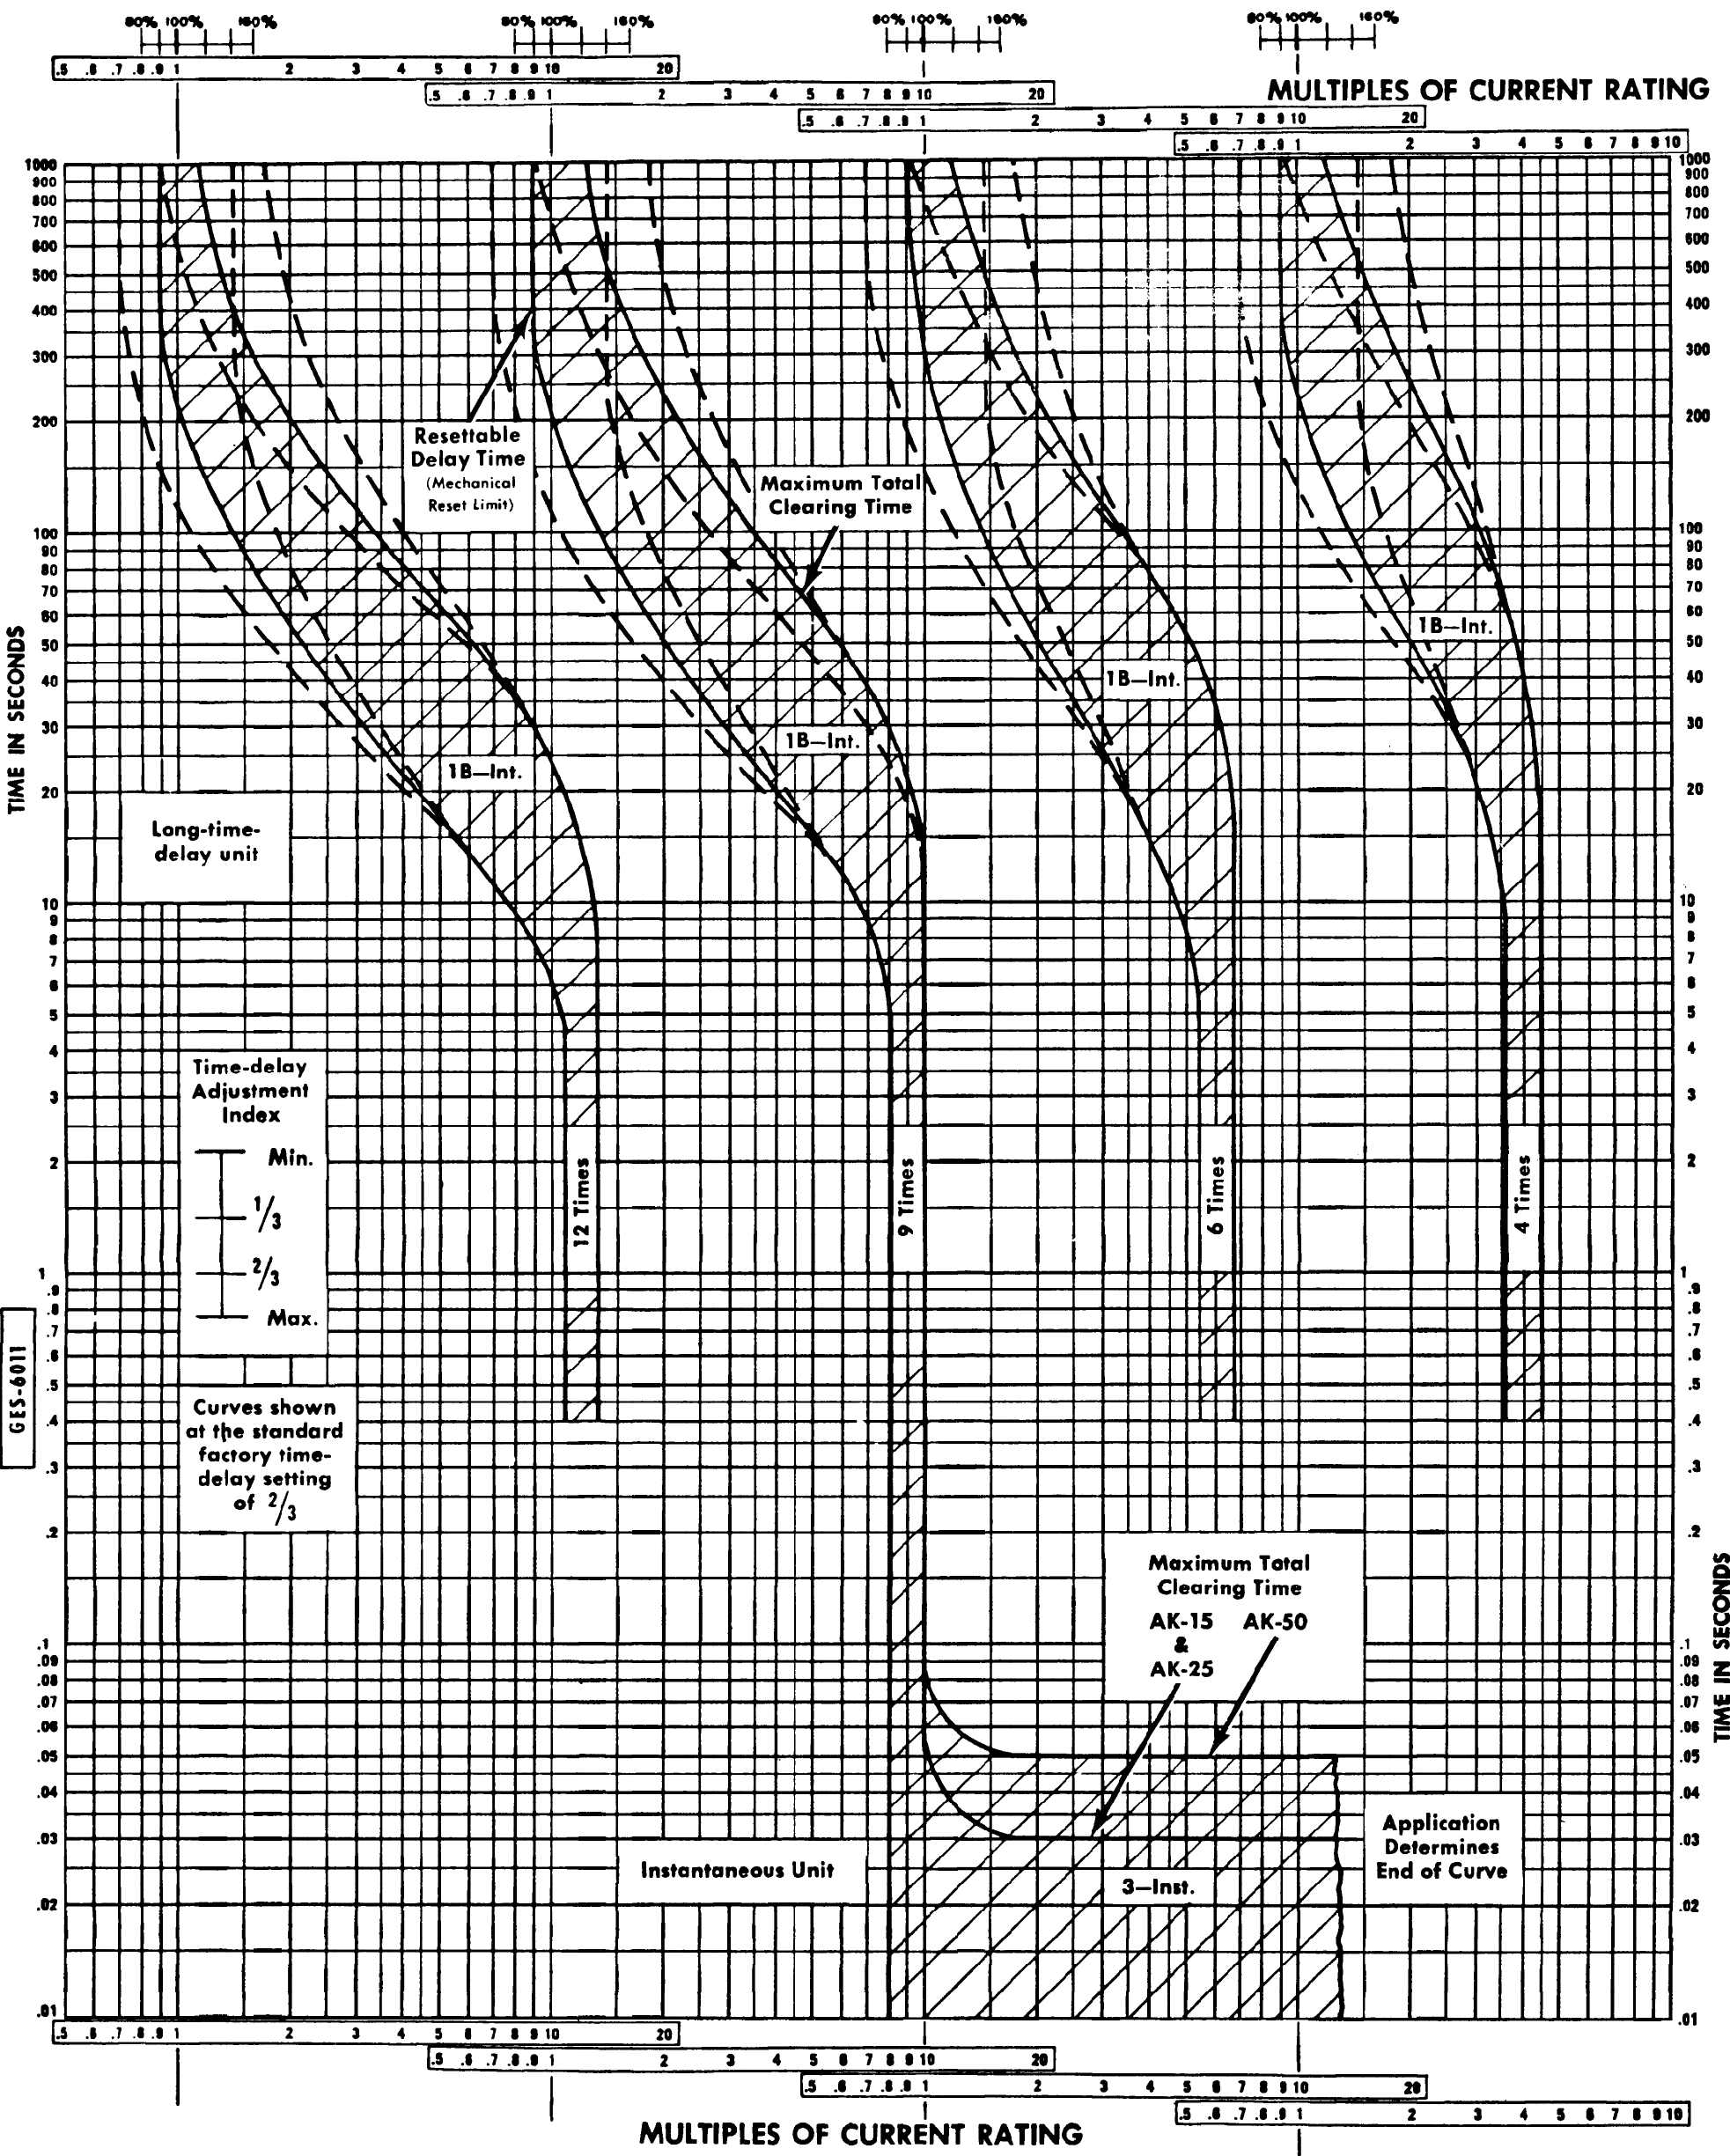

GENERAL ELECTRIC

**TYPE AK LOW-VOLTAGE POWER CIRCUIT BREAKER
EC-2 & EC-2A SERIES TRIP DEVICE**

GES-6011

	Current Ratings (Amperes)
AK-15	15, 20, 30, 40, 50, 70, 90, 100 125, 150, 175, 200, 225
AK-25	40, 50, 70, 90, 100, 125, 150, 175 200, 225, 250, 300, 350, 400, 500 600
AK-50	200, 225, 250, 300, 350, 400, 500 600, 800, 1000, 1200, 1600

**1B-3 Long-time-delay and Instantaneous
Time-current Curves**

Adjustments
Long-time-delay Unit: Pickup settings are 80 to 160% of rating. (Settings higher than 100% do not increase the continuous current rating.)
Instantaneous Unit: Pickup settings are 4 to 9X, or 6 to 12X (std.), or 9 to 15X of rating.

(Curves apply at 60 cycles for ambient temperature of 25 C)