


MULTIPLES OF CURRENT RATING

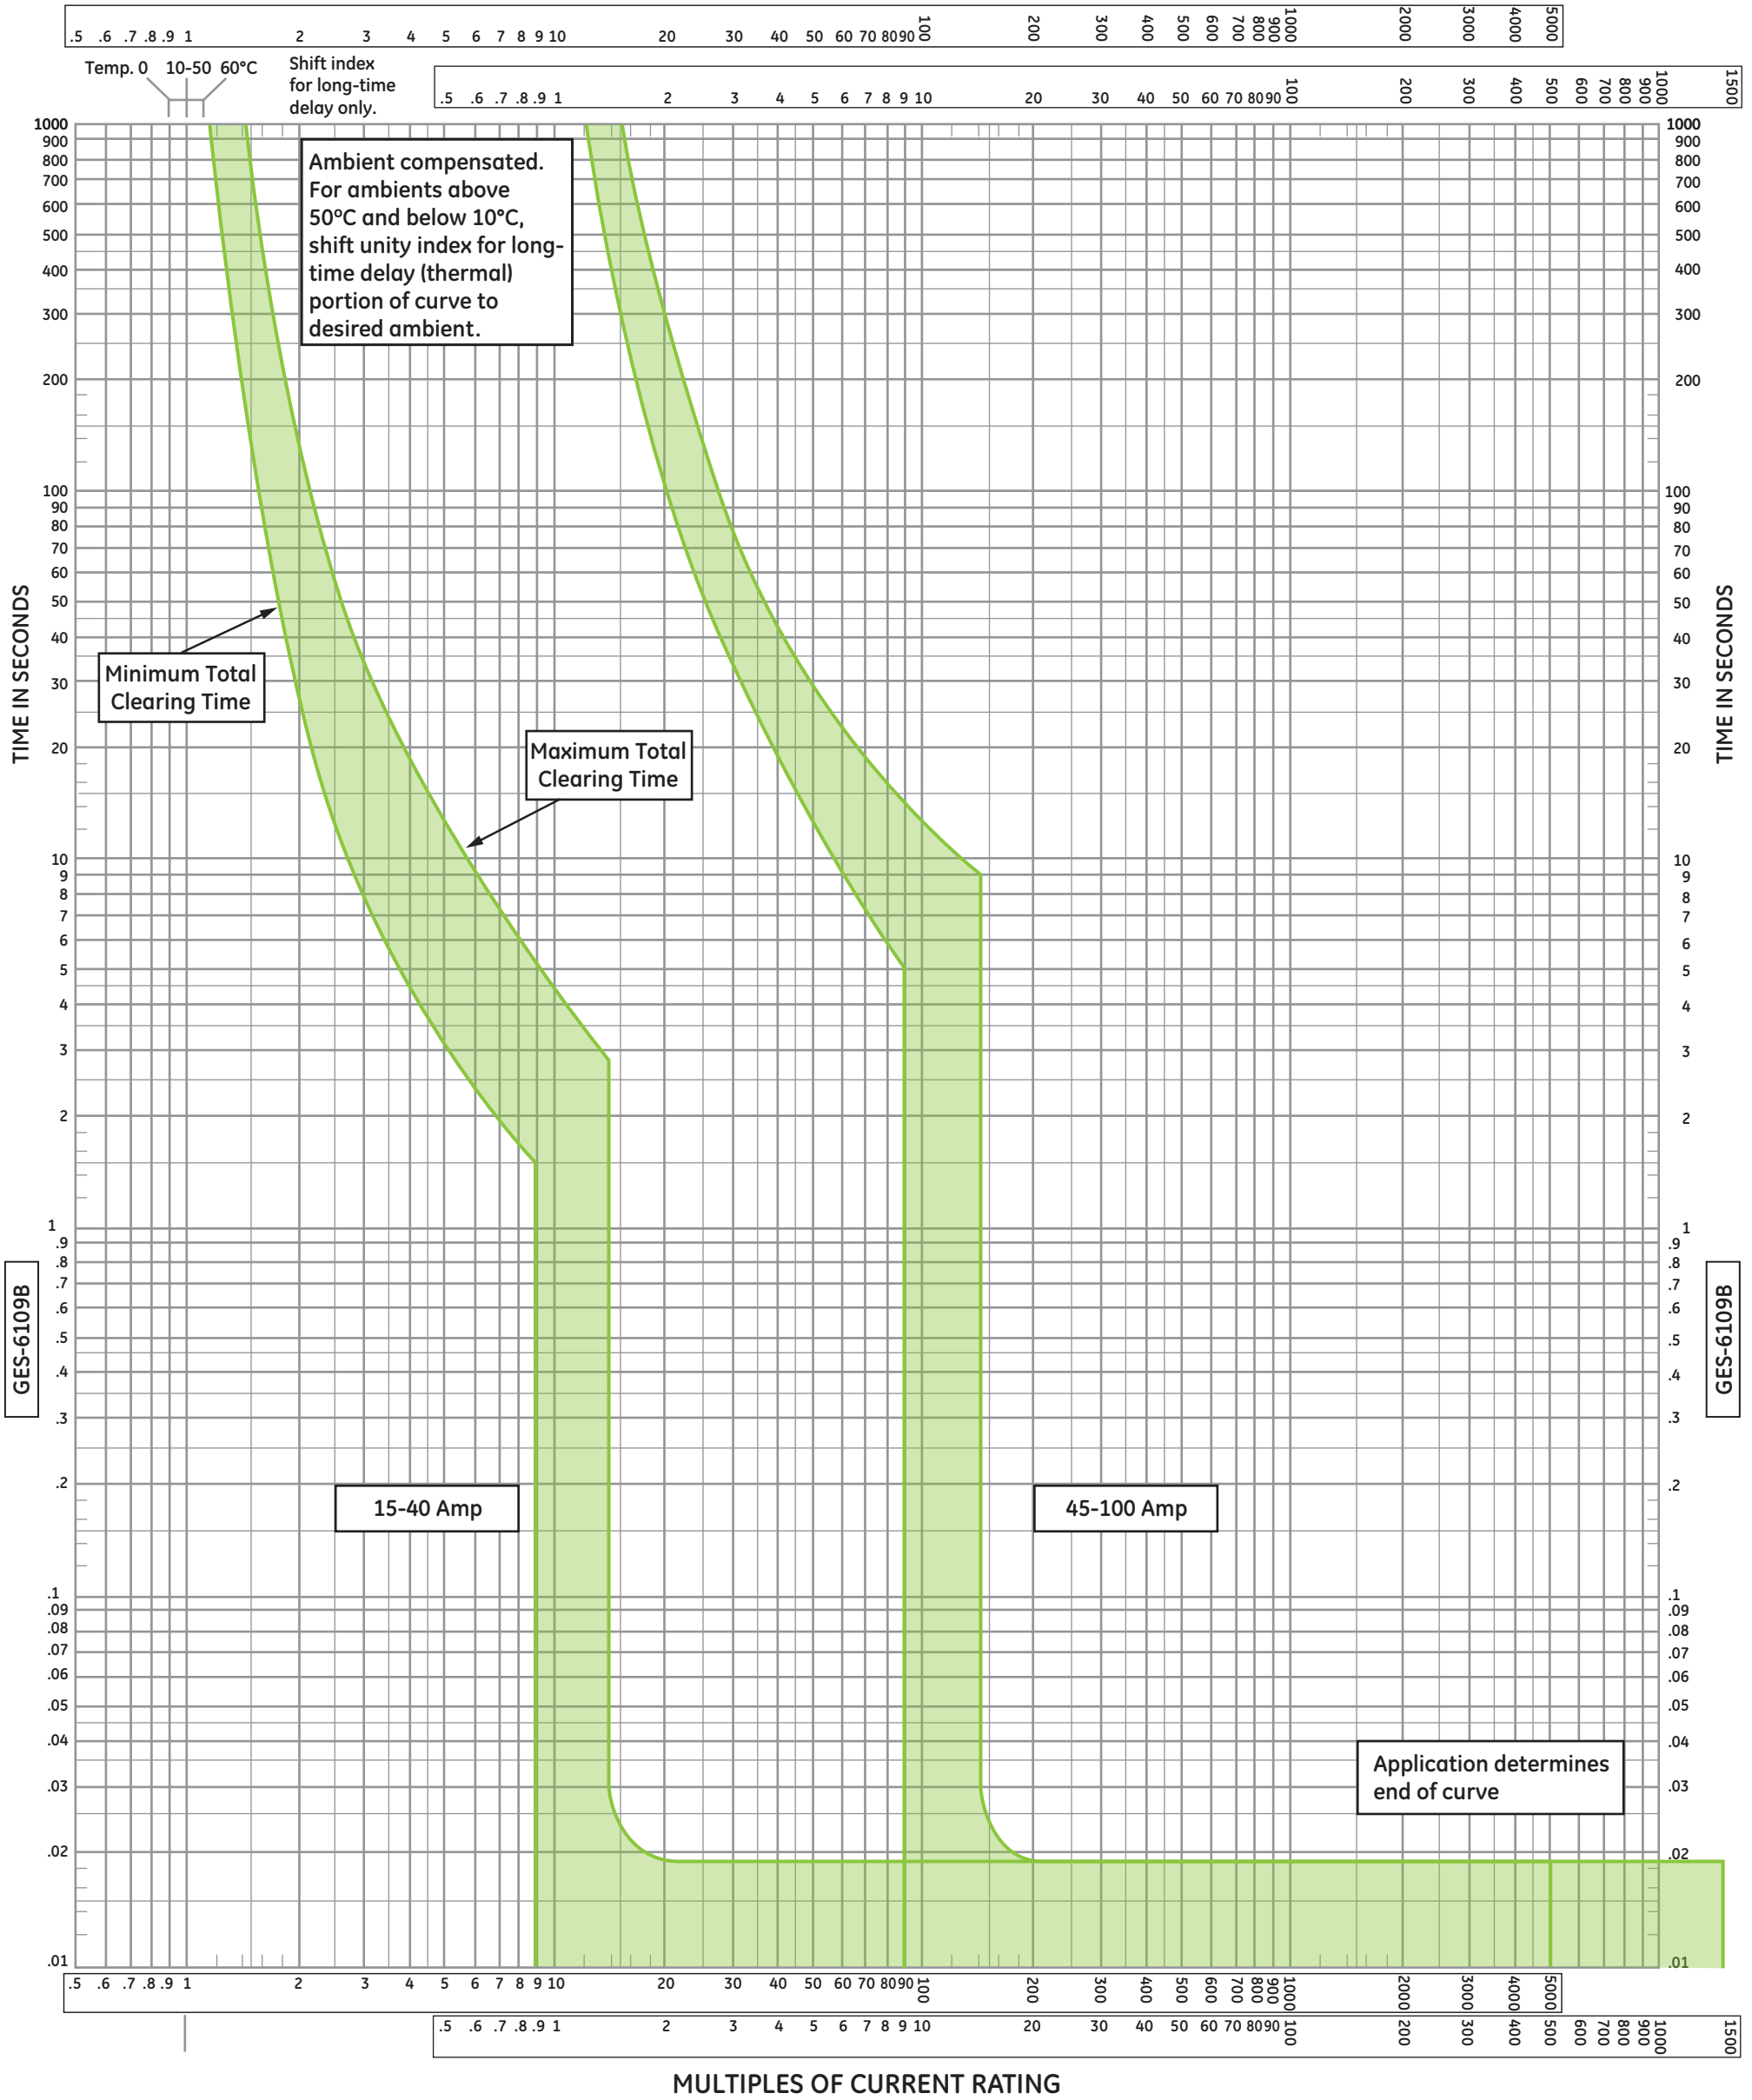

GE Consumer & Industrial -
Electrical Distribution

Current Ratings

15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80,
90 and 100 Amperes

Voltage Ratings

600 Vac, 250 Vdc

Frequency Rating

60 Hertz

**Molded Case Circuit Breaker
E 100 LINE**

Types TEF & THEF
Long-time Delay and Instantaneous
Time-current Curves

Curves show ambient-compensated circuit breaker
in open air, 10°C to 50°C ambient, wired with
conductors of corresponding rating, no prior load. For
all other ambients, use rating shift index at top of sheet.


GES-6109B

Supersedes GES-6109A

Adjustments

Long-time delay thermal trip: not adjustable.
Instantaneous magnetic trip: not adjustable.

MULTIPLES OF CURRENT RATING

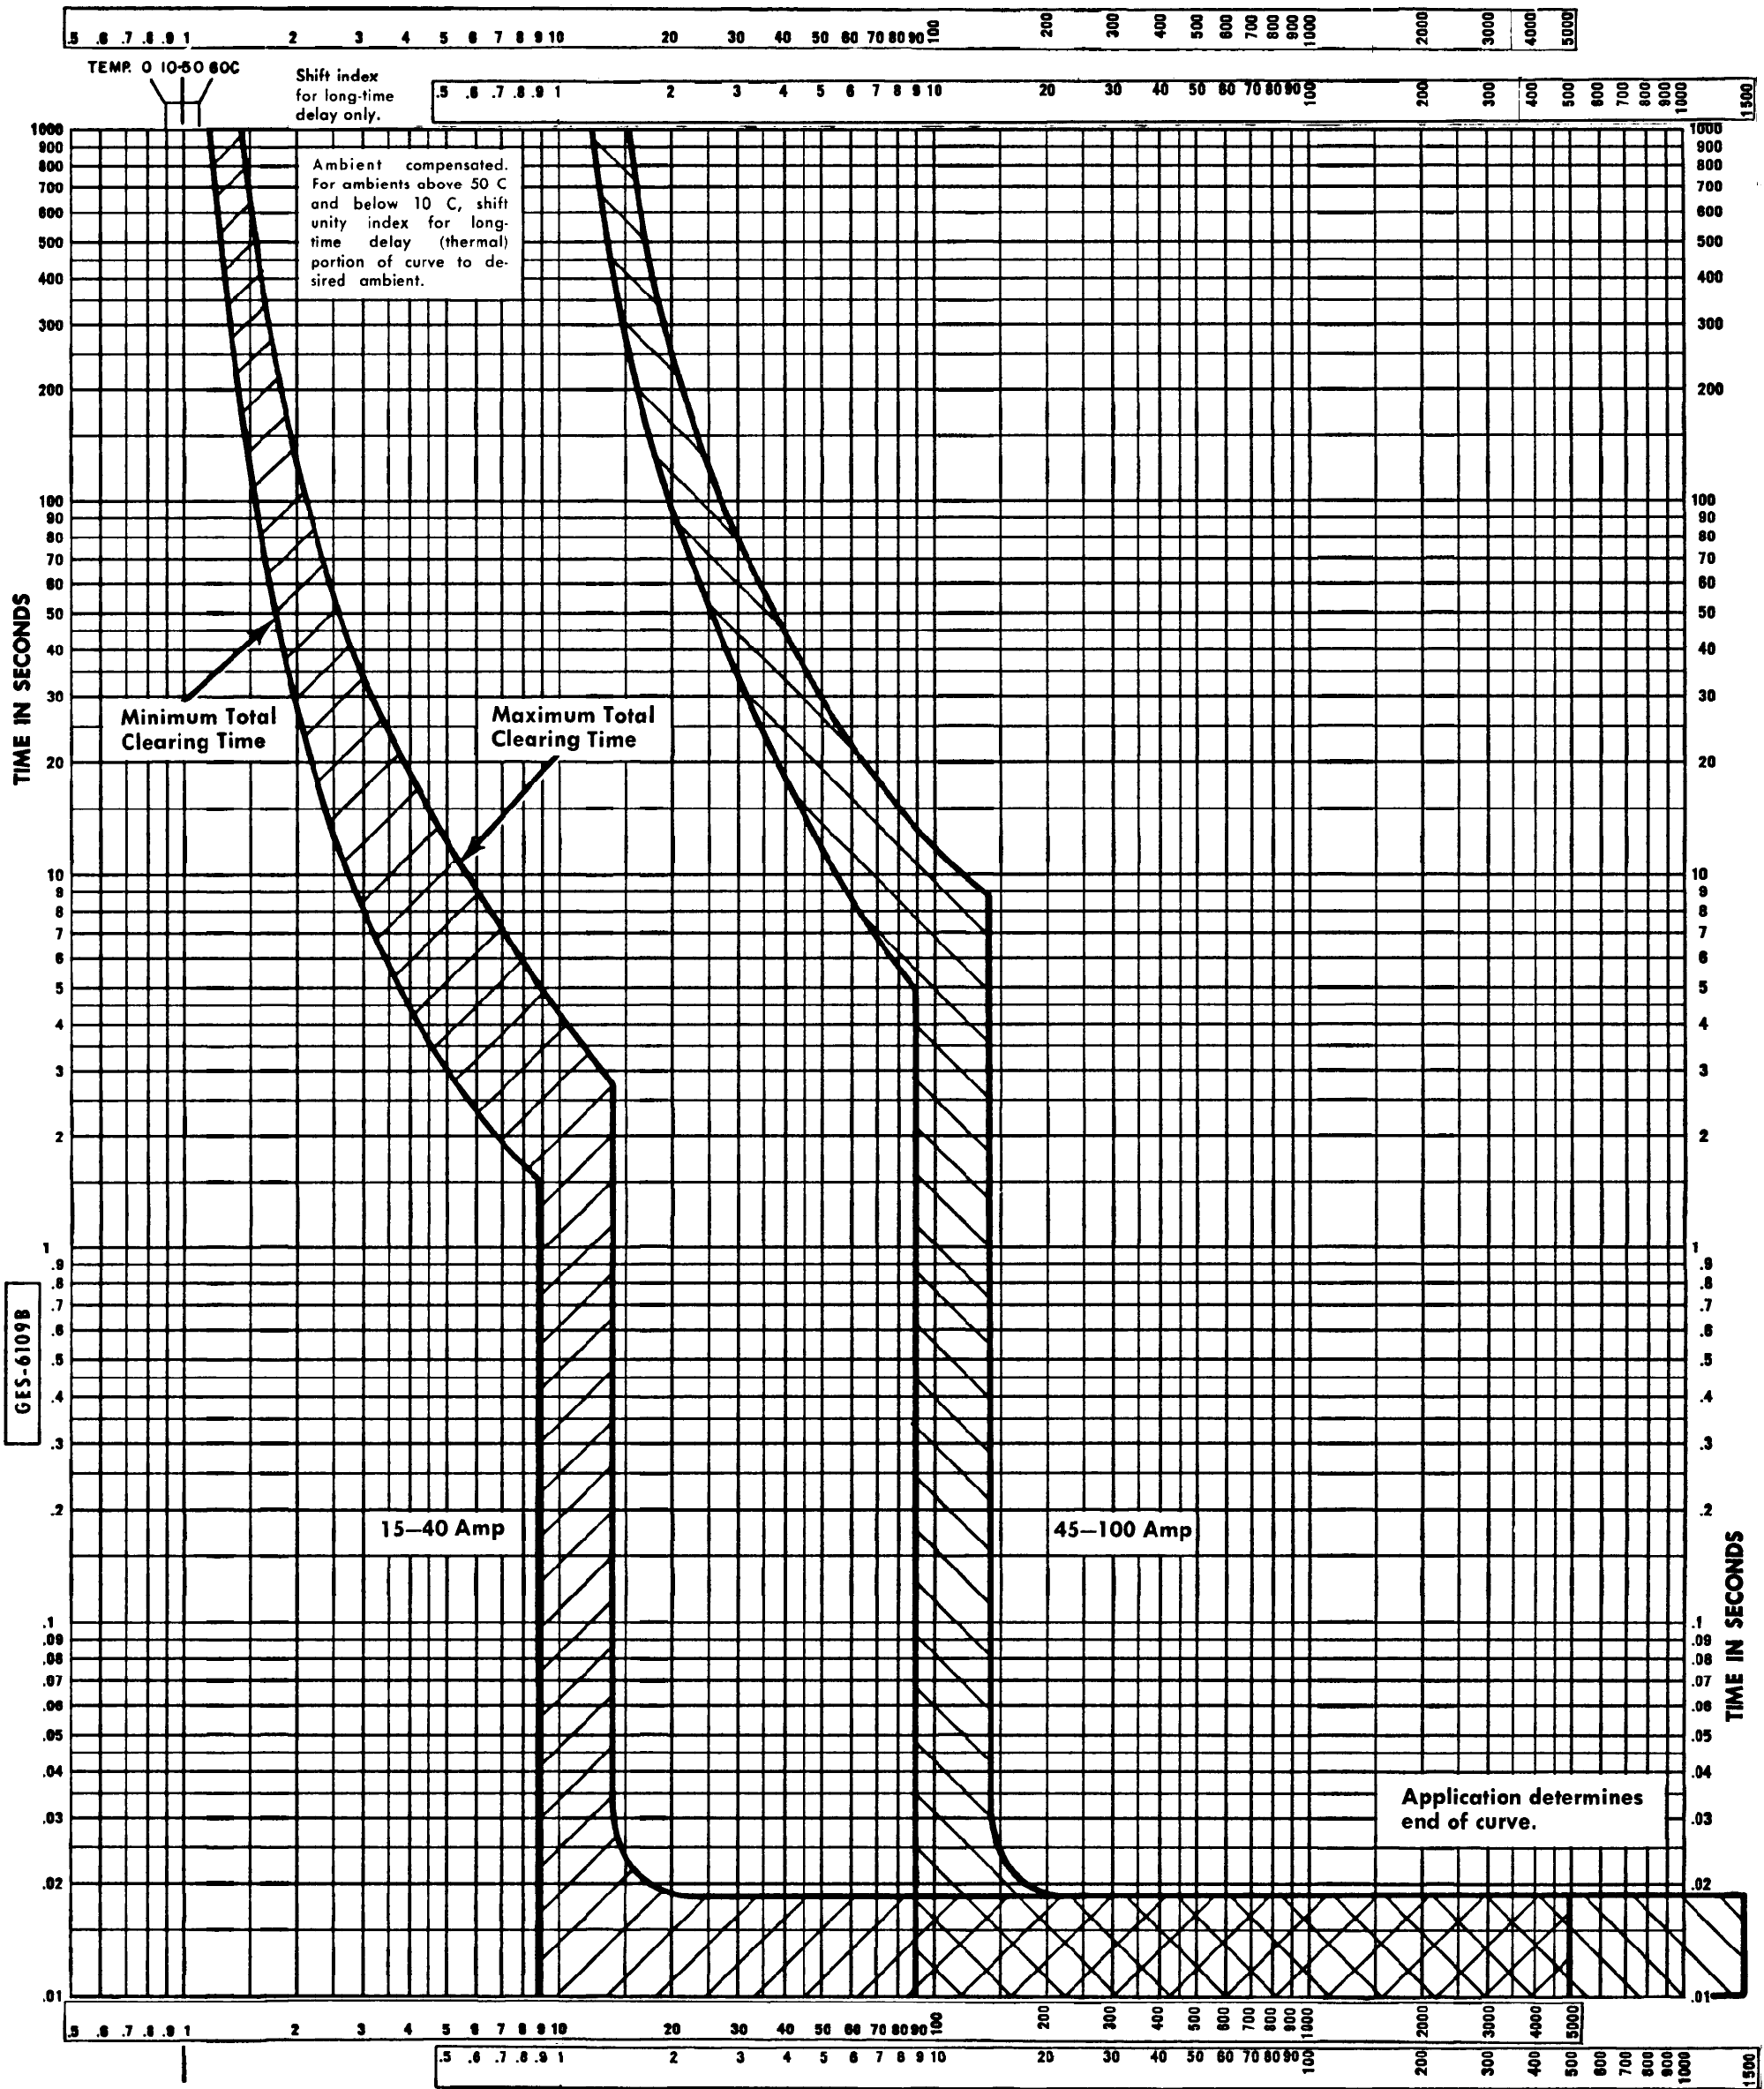

MULTIPLES OF CURRENT RATING

GENERAL ELECTRIC

Current Ratings
15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80,
90 and 100 amperes

Voltage Ratings
600 volts ac, 250 volts dc

Frequency Rating
60 Hertz

MOLDED-CASE CIRCUIT BREAKER

E 100 LINE

Types TEF and THEF

Long-time Delay and Instantaneous
Time-current Curves

(Curves show ambient-compensated circuit breaker in open air, 10 to 50 C ambient, wired with conductors of corresponding rating, no prior load. For all other ambients, use rating shift index at top of sheet.)

GES-6109B

Supersedes GES-6109A

Adjustments

Long-time delay thermal trip: not adjustable.
Instantaneous magnetic trip: not adjustable.