


Midwest Electric Products

# Entergy Approved 4, 6, 8 & 12 Circuit Ringless Meter Socket Load Centers

- Removable covers, embossed stand-offs, and ample gutter space for quick installation and wiring
  - G90 galvanized steel or aluminum construction for superior corrosion protection
  - Durable polyester powder coat finish resists chipping and fading
  - Stainless steel latch and hasp
  - Lockable meter, raceway, and utility compartments
- 
- Single phase, 120/240V, three wire, up to 22kAIC rated
  - NEMA 3R weatherproof enclosure
  - Rated as Service Equipment (Panelboard no. 67 and Meter Socket no. 414)
  - Service barriers included for factory installed main circuit breakers
  - Underground Service Connection
  - 60°C/75°C conductor rating



# 4, 6, 8 & 12 Circuit Ringless Meter Socket Load Centers Entergy Approved

## Technical Data


| Model Number  | Main Ampere Rating | Max. 1" Spaces (Single Phase) | Main Breaker Style Included | Neutral Installed | Enclosure Style | Short Circuit Rating |
|---------------|--------------------|-------------------------------|-----------------------------|-------------------|-----------------|----------------------|
| R101CB2ETG    | 100                | 6                             | 100A                        | Yes               | G90 Steel       | 22kAIC               |
| R208CR2AETG   | 200                | 8                             | 200A                        | Yes               | G90 Steel       | 22kAIC               |
| R281CB1ETG    | 200                | 4                             | 200A                        | Yes               | G90 Steel       | 22kAIC               |
| R256EB118AETG | 200                | 12                            | Main Lug                    | Yes               | Aluminum        | 10kAIC               |
| R256EB1AETG   | 200                | 12                            | Main Lug                    | No                | G90 Steel       | 10kAIC               |
| R256EB1NAETG  | 200                | 12                            | Main Lug                    | Yes               | G90 Steel       | 10kAIC               |



## Mounting Specifications

| Model Number  | Dimensions (inches) |        |       | Weight (lbs.) |
|---------------|---------------------|--------|-------|---------------|
|               | Width               | Height | Depth |               |
| R101CB2ETG    | 17                  | 26     | 4.7   | 41            |
| R208CR2AETG   |                     | 28     |       | 49            |
| R281CB1ETG    |                     | 28     |       | 37            |
| R256EB118AETG |                     | 26     |       | 24            |
| R256EB1AETG   |                     | 26     |       | 35            |
| R256EB1NAETG  |                     | 26     |       | 35            |

## Compartment Configurations

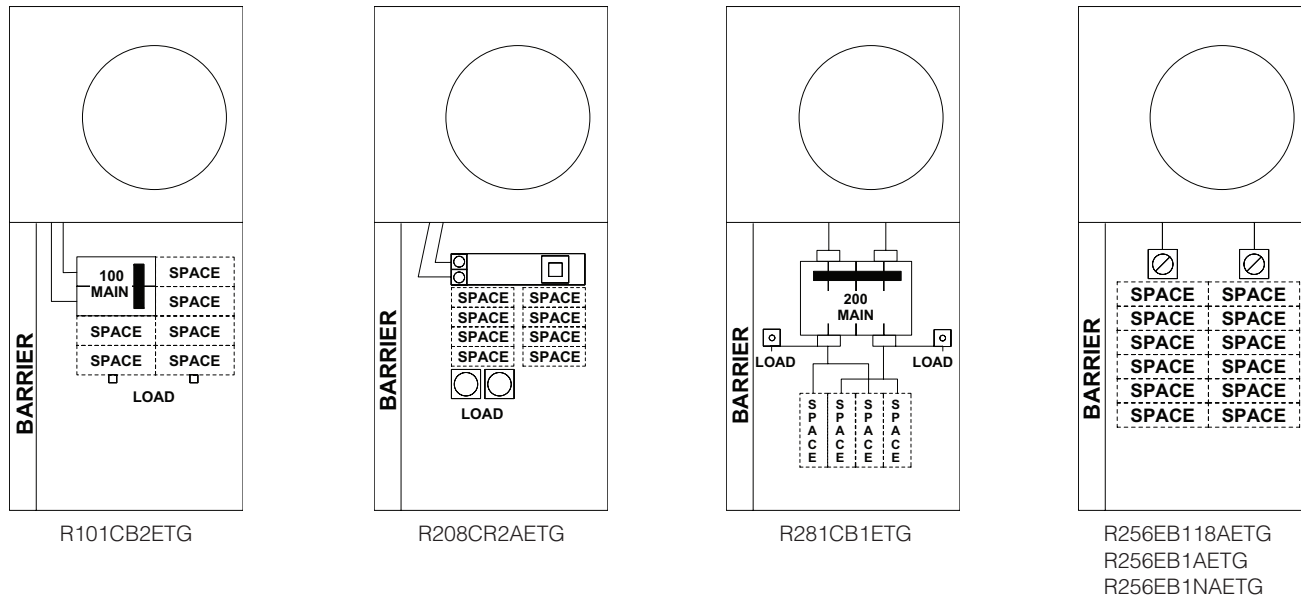

Information provided is subject to change without notice. Please verify all details with Midwest Electric Products. All values are or typical values when measured under laboratory conditions, and Midwest makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

Midwest Electric Products  
41 Woodford Avenue  
Plainville, CT 06062  
Customer Service: 866-685-0577 • Fax: 804-965-1041  
[www.midwestelectric.com](http://www.midwestelectric.com)

© 2016 Midwest Electric Products

MET-024B (11/16)

