



NE075AC48ATEZ Infinity Rectifier



Features and Advantages

- Compact - 1RU form factor provides high power density 34 Watts / Cubic inch.
- Efficient - Peak efficiency of 95% occurs at 50% load matching sweet spots with customer use patterns.
- Flexibly provides 75 Amps of 48 Volt power from both conventional and sustainable sources of energy.
- Starts and runs at any AC voltage from 95 to 305 Vac.
- Operates over a broad temperature range (-40°C through +75°C).
- Fail safe performance – hot insertion capabilities allow for rectifier replacement without system shutdown; soft start and inrush current protection prevent nuisance tripping of upstream breakers.
- Extended service life – parallel operation with automatic load sharing ensures that units are not unduly stressed.


Uncompromised Advanced Technology to Simplify Your Network

GE Energy's NE075AC48ATEZ Infinity Single-phase Rectifier is designed to efficiently transform energy from any AC source into the 48 Volt DC power needed for Central Office, MTSO and wireless cellular sites. This means that one single rectifier can be used globally to meet all your 48V powering needs.

Efficiency is market leading for diode protected, true hot pluggable, 48 Volt rectifiers. The NE075AC48ATEZ offers a powerful combination of efficiency, network simplicity and reliability.

Efficiency % Typical at 277V

NE075AC48ATEZ Efficiency vs Output Current
(Temp: 25°C, Vin: 277Vac, 60Hz)

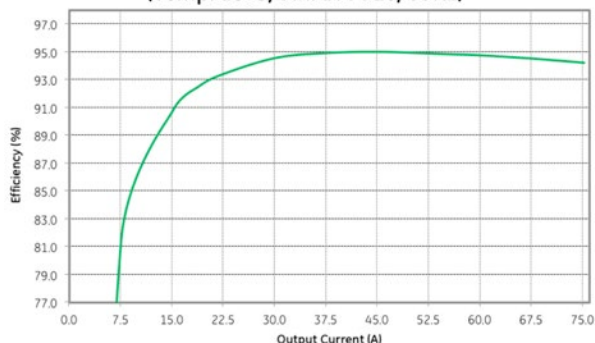

A True System Solution


Infinity Rectifiers are part of the proven Infinity Power System platform particularly designed to meet the unique needs of the ever-changing network landscape.

- Monitoring / control – the built in microprocessor controls and monitors all critical rectifier functions and communicates with the system controller using the built in Galaxy Protocol serial interface.
- Dual Voltage Compatible - unique connector pin designation allows the 48 Volt rectifiers to be used in a “Universal” power shelf, alongside DC-DC converters supporting loads at 24 Volts dc.
- Plug and Play – installation of the rectifier in a shelf connected to a compatible system controller initializes all set up parameters automatically. No adjustments are needed.
- Proportional Load Share – when paired with a NE050, both rectifiers share equal amount of load in relation to each unit's capacity.
- Meets most 3 phase needs. Works with 208V 3 Phase in a phase to phase configuration. Works from 480V 3 Phase in a line to neutral configuration.


Electrical Specifications

INPUT VOLTAGE & OUTPUT POWER	
Response to AC input voltage	Operates according to figure, turning on at all V_{in} above $90V_{ac}$. Output power $1200W < 140V_{ac}$ $4087W > 175V_{ac}$ Output power follows linear path between defined points. 305V max excursion voltage
AC input current	15A max @ $120V_{ac}$ 22-16A @ $200-277V_{ac}$
Power Factor	0.98 @ loads over 50%
THD	< 5% @ loads over 50%
Holdover	15 milliseconds, with $V_{out\ final} > 21V$
Frequency	45-66Hz or Dc

Output Power vs Input Voltage

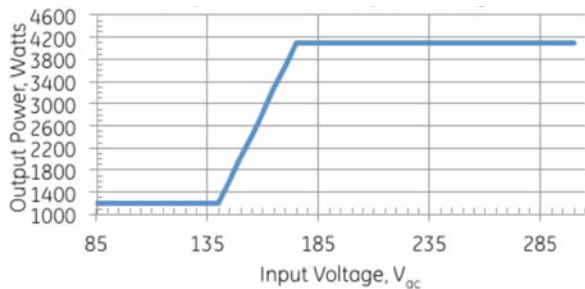


Constant Power to 48 Volts

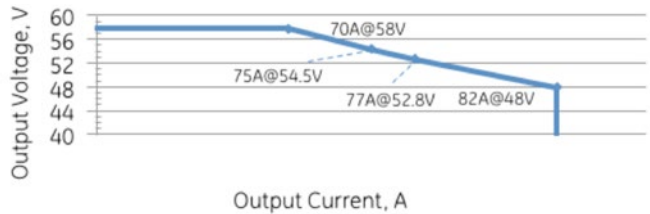

OUTPUT	
V_{out}	+42-58 V_{dc} range Default = 54.5 V_{dc}
I_{out}	22A @ low input line 75A @ high input line 50A @ high line in older shelves
Regulation	± 0.05 w/controller
Ripple	100 mV _{rms} , 250 mV _{p-p}
Efficiency	Approaching 95%
Soft Start	Starts up into fully discharged batteries.

Rated Output Current (at $V_{in} > 175V_{ac}$)

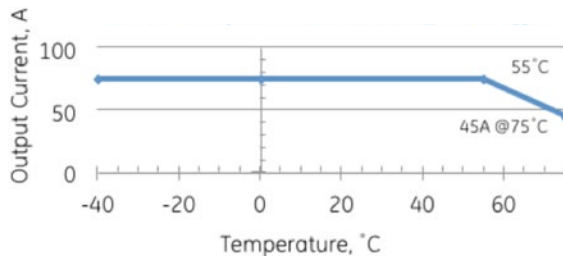

Environmental, Compliance & Physical

Operating Ambient Temperature Range	-40°C to +75°C (Output derates at 2%/°C beginning at 55°C)
Cooling Method	Front to back airflow with onboard temperature controlled fans
Operating Relative Humidity	0 - 95% (non-condensing) for use in a controlled environment
Electromagnetic Compatibility	FCC Part 15, EN 55022 (CISPR22), EN 55024, Level A, GR-1089
Lightning Surge	EN/IEC 61000-4-5 Level 4 (Error free), ANSI C62.41 Category B 100 kHz ring and 1.2/50µs combination waves (6kV damage free)
Agency Certifications* Planned	UL1950, EN60950, CSA*234/950, NEBS GR-1089, GR-63-CORE, RoHS 6/6
Heat Release	266 Watts, or 908 BTU/hr at full load of 4087 Watts
Mean Time Between Failure (MTBF)	300k Hours @ 25°C per Telcordia SR-332, Method 1, Case 3
Height x Width x Depth, Weight, Packaged Weight	1.63x5.23x13.85in (42x133x352mm), 5.90 lbs (2.7 kg), 6.95 lbs (3.2kg)


Power Unit and Power Unit Shelf Connectors

Power Unit PWB

A4	A3	A2	A1	-48V	-48V	RTN	RTN	RTN	RTN	+24V	+24V	+24V	PE/GND (ACEG)	L2/N	L1
B4	B3	B2	B1			(-48 / +24V)	(-48 / +24V)	(-48 / +24V)	(-48 / +24V)						
C4	C3	C2	C1												
D4	D3	D2	D1												
				P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
4x Pins	4x Pins	4x Pins	4x Pins	Blade	Blade	Blade MFBL (long)	Blade MFBL (long)	Blade MFBL (long)	Blade MFBL (long)	Blade	Blade	Blade	Blade MFBL (long)	Blade	Blade

OUTLINE DRAWING

Shown looking into the rear of the power unit

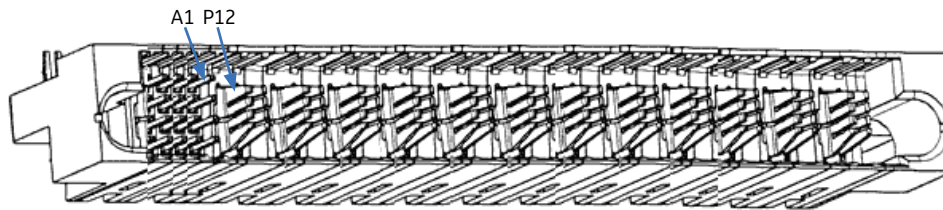


Power Unit Connector - AMP Multi-Beam XL (FCI # 51939-234LF or Tyco # 1900948-1)

Signals and Signal Pins

PIN	LENGTH	SIGNAL	DESCRIPTION
A1	Long	RS-485-	Non-Inverting RS-485 signal line (RS-485 A)
B1	Long	RS-485+	Inverting RS-485 signal line (RS-485 B)
C1	Long	Factory Programming	Reserved for Factory Programming – Open Circuit in the system shelf.
D1	Long	Return	<ul style="list-style-type: none"> Signal Return for PSIDn, SIDn, & Interlock Power Units Connect Return to NE Common Return internally. Power Units diode isolate the Return signals from each Power Slot.
A2	Long	PSID0	Power Slot Address 0
B2	Long	PSID1	Power Slot Address 1
C2	Long	PSID2	Power Slot Address 2
D2	Long	SID3	Shelf Address 3
A3	Long	SID4	Shelf Address 4
B3	Long	SID5	Shelf Address 5
C3	Long	SID6	Shelf Address 6
D3	Long	SID7	Shelf Address 7
A4	Short	Interlock	<ul style="list-style-type: none"> Disables power conversion within a Power Unit when not connected to the Return signal Power Unit Shelves connect Interlock directly to the Return signal at each Power Slot.
B4	Long	Factory Programming	Reserved for Factory Programming – Open Circuit in the system shelf.
C4	Long		
D4	Long		

Physical Interface Dimensions

OUTLINE DRAWING

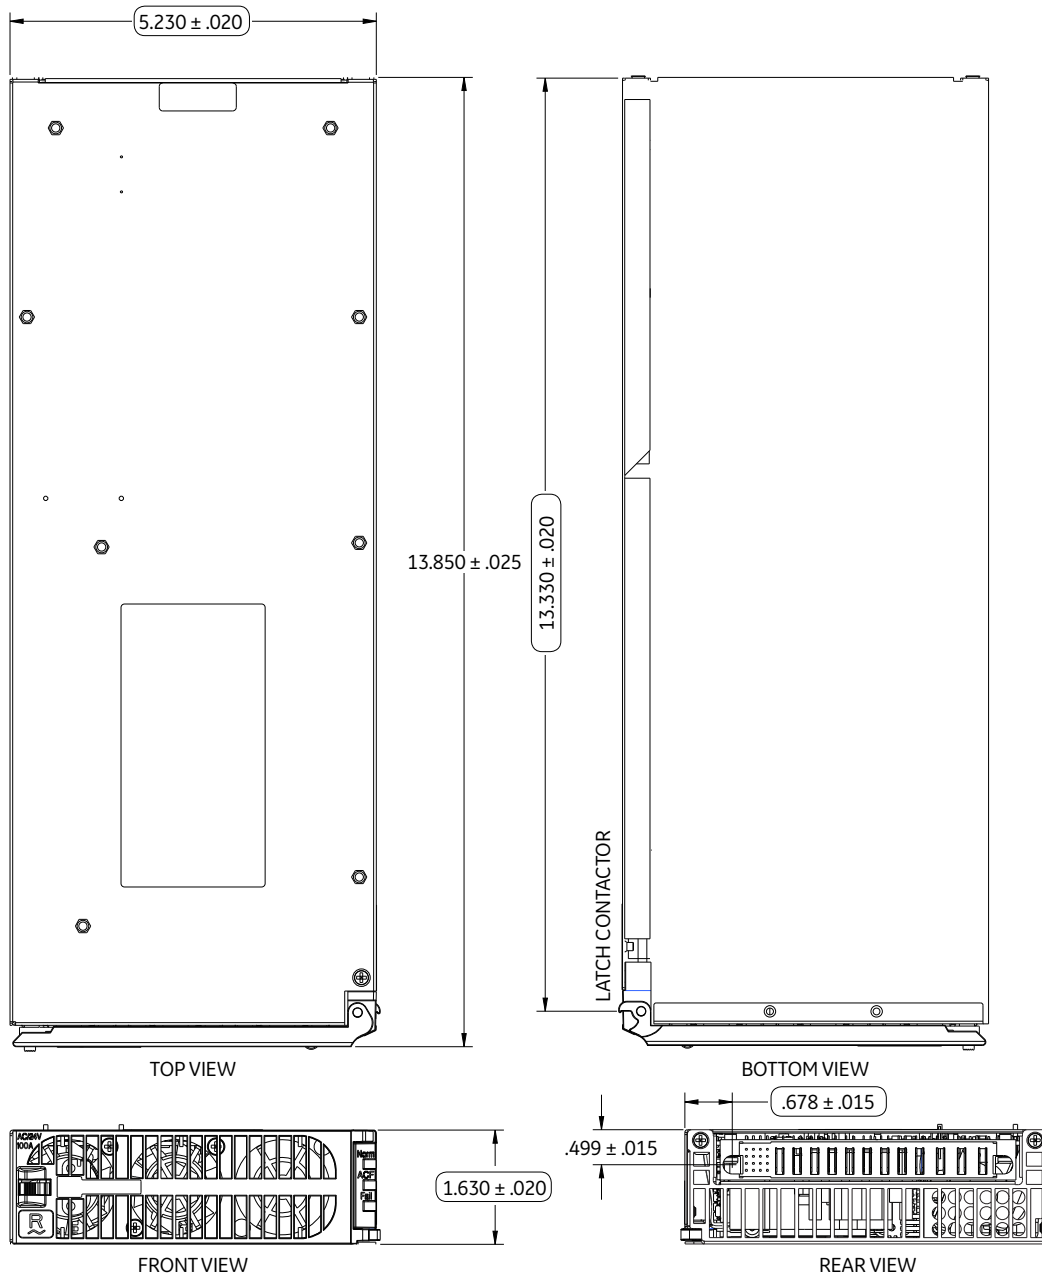

GE
Critical Power
601 Shiloh Road
Plano, TX 75074
+1 877 546 3243
www.gecriticalpower.com

*Registered trademark of the General Electric Company.
The GE brand, logo, and lumination are trademarks of the General Electric Company. © 2015 General Electric Company.
Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
NE075AC48TEZ_FS, Rev. 09/2015