



Wire Range Size

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRANDED	SOLID	STRANDED
LINE	-----	6-1/0	-----	6-1/0
LOAD	14-10	14-10	-----	-----
NEUTRAL	12-8	12-1/0	10-8	10-1/0
NEUTRAL	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

Top View

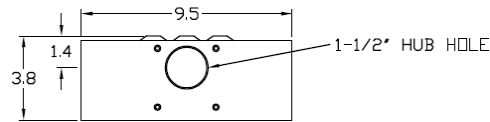


Left Side View

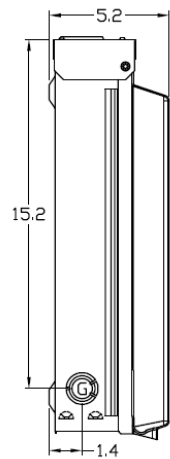


Front View Inside Cover


Front View Interior

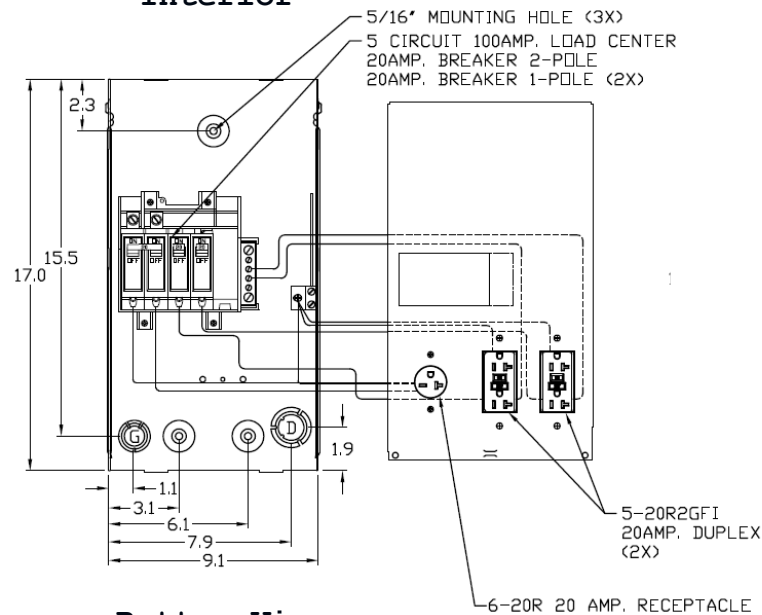


Front View External

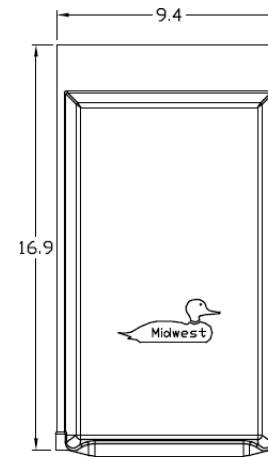

Right Side View

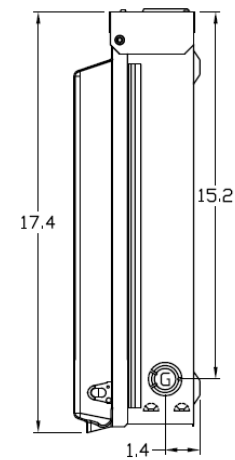


Bottom View

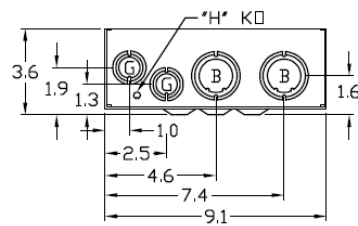

Knockouts

- G= 1/2", 3/4", 1" KO
- D= 3/4", 1", 1-1/4" KO
- B= 1", 1-1/4", 1-1/2" KO
- H= 9/32" KO

Configuration



Receptacles

6-20R
(2) 5-20R2GFCI

Circuit Protection

THQL2120
(2) THQL1120



Midwest Electric Products
Plainville, CT

MIDWEST TEMPORARY POWER 100A UNMETERED TOP
FEED 1-20A 2P& 2-20A 1P 1PH 120/240V N3R G90

CAT NO	DWG DATE	REV #
U038C010	07/12/2016	01