



C-2000™ Contactors & Starters

Contactors and Relays with Ring Terminal Capability




Secure, vibration-resistant terminations


Contactors, control relays, front-mount auxiliary contact blocks & pneumatic timers

C-2000 contactors (CL00 - CL02) and accessories with ring terminal capability are ideal for those transportation and industrial applications where vibration resistance is a must, and they maintain the finger-safe protection required in many international markets.


Connecting ring terminals to these products is a quick, easy process.

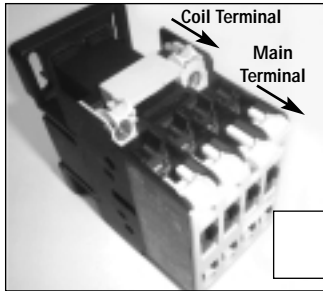

Move the plastic terminal cover to its forward position.

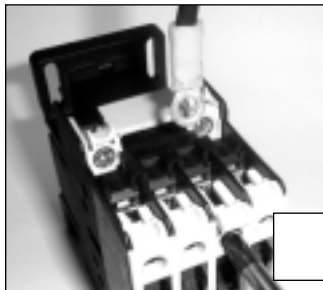

Insert the ring terminal into the contactor terminal.

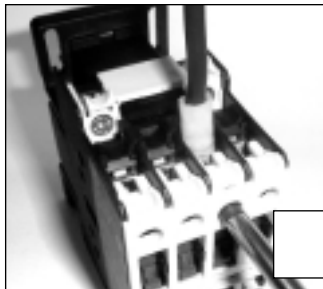


Tighten the terminal screw to the appropriate torque.



The process for front-mount auxiliary contact blocks and pneumatic timers is exactly the same.

Technical Data

Vibration resistance	CL00-CL02 Contactors RL4 Relays Auxiliary Contact Blocks Pneumatic Timers	
Ring terminal capability	Power terminals Control terminals Coils	
Max. ring connections per terminal	2	
Finger safe protection		
Ring Terminal Dimensions	Coil Terminal	Main Terminals
Min. external diameter (a)	6.5mm	7.9mm
Max. external diameter (a)	7.6mm	9.5mm
Min. internal diameter (b)	3.6mm	3.6mm

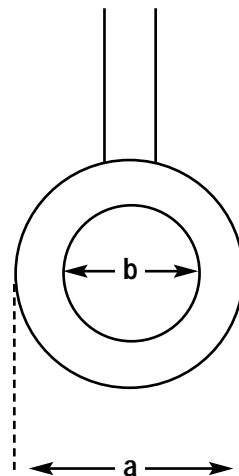

GE Industrial Systems

General Electric Company
41 Woodford Avenue, Plainville, CT 06062
www.GEindustrial.com