




# Transformer

Catalog Number 9T83B3878

**9Q3A300AAA00A2T00**

**300.0 KVA 60 HZ 3 PH 6.9 % IMP**

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C Type: QL

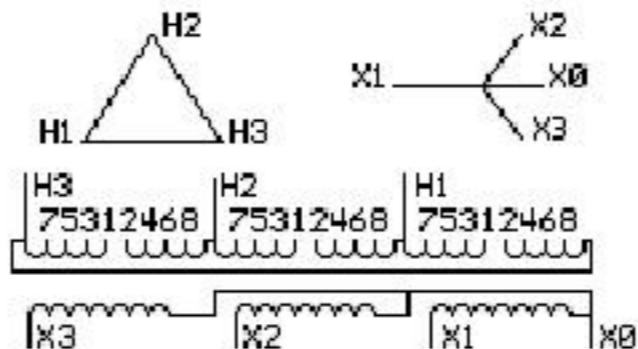


### JUMPER CONNECTION

TAP	VOLTS
1-2	506
2-3	493
3-4	480
4-5	468
5-6	455
6-7	442
7-8	430

PRIMARY (H) 480 VOLTS (LINE-LINE)  
 SECONDARY (X) 208 VOLTS (LINE-LINE)  
 120 VOLTS (LINE-NEUTRAL)

### COIL TAP ARRANGEMENT

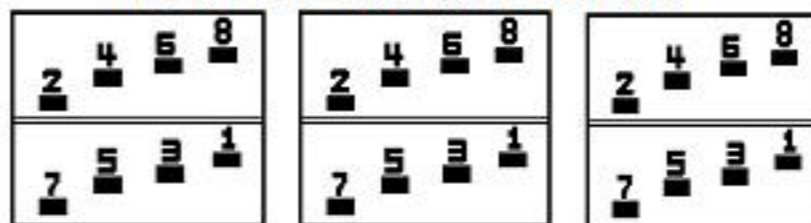

NET WGT 1470 LB 666.8 Kg

081715 N534! L38AA  
55562 NOG

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4322G.88

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

**IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.**



LISTED 769G

Outline: 303B912AAP178  
Assembled in Mexico

INSPECTION & FINAL TEST  
N534!

